



REV. Status  
 REVISION -  
 10/25/01 RJ  
 REVISION A  
 REVISED PLUG  
 LOCATION. ADDED  
 RoHS  
 05/22/06 MP

- A. Electrical specifications
1. Input voltage: AC 120V ±10% 60Hz ±0.5Hz
  2. Output voltage and current: DC 9V at 350mA

V <sub>in</sub>	100% Load	No Load
108	6.5VDC MIN	-
120	8.5-9.5VDC	14.0VDC MAX
132	-	15.0VDC MAX

NOTE: Specification applies after 10 minutes warm-up with full load and at any operating temperature.

3. Operating temperature: -10 °C to +40 °C
4. Storage temperature: -20 °C to +85 °C
5. Operating and Storage Humidity: 0 to 95% without condensation
6. Withstand voltage: 1000Vrms 1 minute @ input to output


B. Typical performance data test Condition:  
 Ta= +25°C measured after 10 minute warm-up with input at 120V 60Hz

C. Safety agencies  
 UL and cUL File No. E218172


D. Nameplate: Information is as follows:  
 Metallic letters on a black background



TYPICAL PERFORMANCE CHART

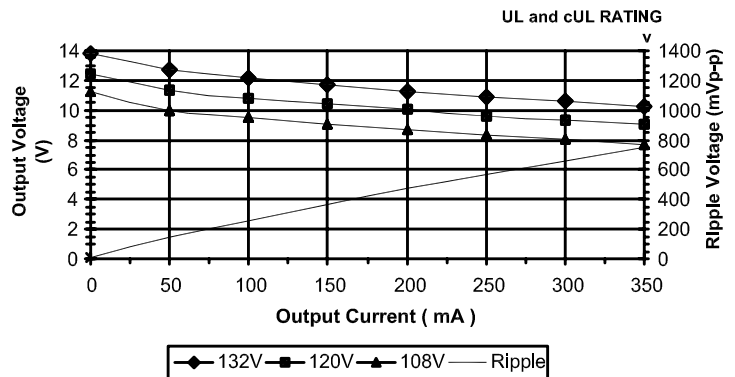

E. Mechanical Specifications  
 All dimensions shown are nominal unless otherwise specified

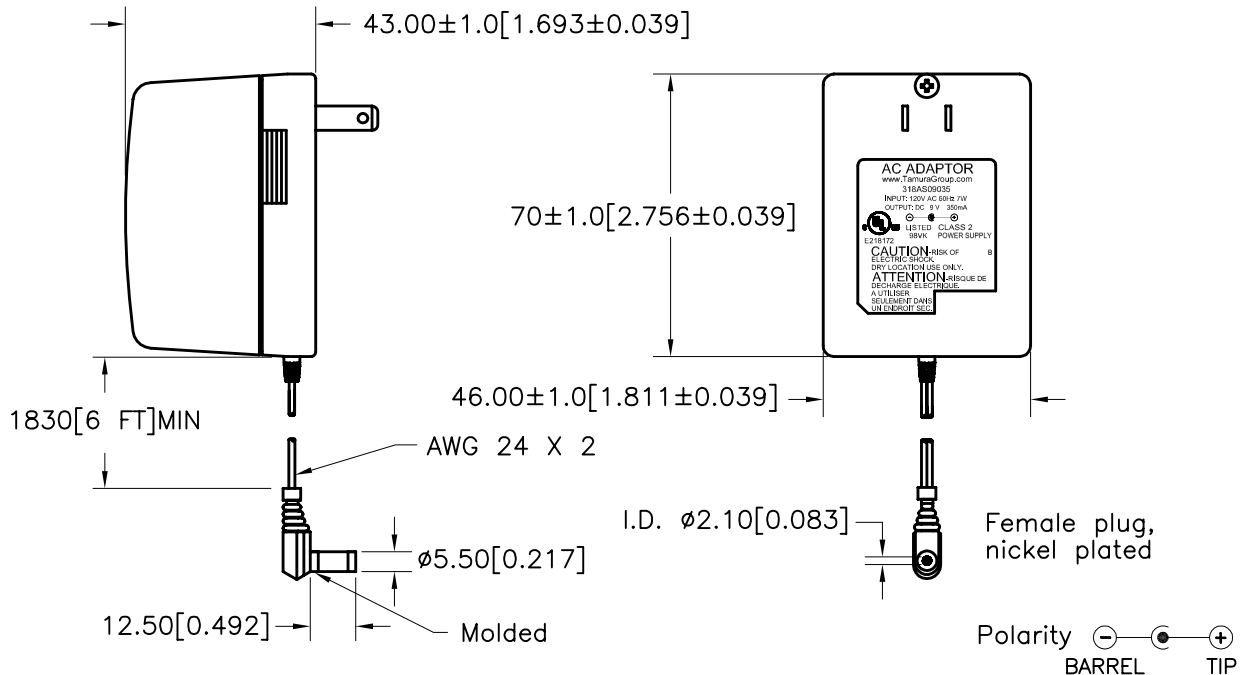

PREPARED BY:  
 K. BRENNAN

ENGINEER:  
 M. PITCHAI

QUALITY CONTROL:  
 T. CLEM

APPROVED:  
 Y. SEKIGUCHI

DWG CONTROL NO. P-A7-12899 ACAD\PS\A7128991.DWG	REV A	UL/cUL DC 9V 350mA POWER SUPPLY
CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE		<b>TAMURA CORPORATION OF AMERICA</b> 43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624 (951) 699-1270 FAX 9516769482

<b>318AS09035</b>
MODEL SPECIFICATION
DIM: mm(In) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.