

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18

## MATERIAL

Glass-fibre reinforced polyamide based (PA) technopolymer, black colour, matte finish.

## ROTATING PIN

AISI 303 stainless steel.

## STANDARD EXECUTION

Pass-through holes for M6 countersunk head screws and referring pins for an accurate positioning of the hinge body.

## ROTATION ANGLE (APPROXIMATE VALUE)

Max 200° (-10° and +190° being 0° the condition where the two interconnected surfaces are on the same plane).

Do not exceed the rotation angle limit so as not to prejudice the hinge mechanical performance.



To choose the convenient type and the right number of hinges for your application, see the Guidelines (see page 1448).

## ASSEMBLY INSTRUCTIONS


1. Remove the rotation pin and fit the two separated bodies of the hinge on the door and on the frame.
2. Assemble the two elements together matching the right alignment of the hinge and insert the rotation pin.



FAM design



Resistance tests					
AXIAL STRESS		RADIAL STRESS		90° ANGLED STRESS	
Maximum working load Ea [N]	Load at breakage Ra [N]	Maximum working load Er [N]	Load at breakage Rr [N]	Maximum working load E90 [N]	Load at breakage R90 [N]
610	6020	640	5020	520	2200

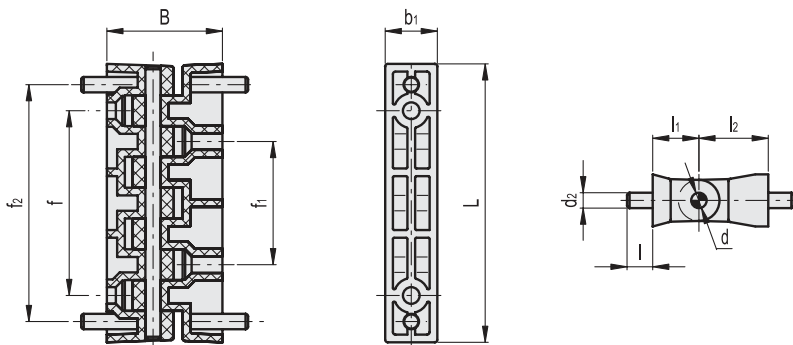

Conversion Table	
1 mm = 0.039 inch	
R	
mm	inch
15	0.60

METRIC

Code	Description	L	B	d2	l	f±0.25	f1±0.25	f2±0.25	l1	l2	b1	d	Pass-through holes	C# [Nm]	⚖️
422511	CFB.108 SH-6	109	45	6	10	72.5	48.2	92.7	18	27	20.5	6	6.5	3	85