


FOR CUSTOM MADE ITEMS ORDER:

- * MINIMUM \$200 VALUE
- * NCNR (NON-CANCELABLE & NON-RETURNABLE)
- * ONE TIME TOOLING CHARGE, IF ANY, MUST BE APPROVED WITH AUTHORIZED SIGNATURE & DATE
- * TURN AROUND TIME COUNTED ARO (AFTER RECEIVED FA OR DRAWING APPROVAL)

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	Internal Release	7/12/2021	Lemon

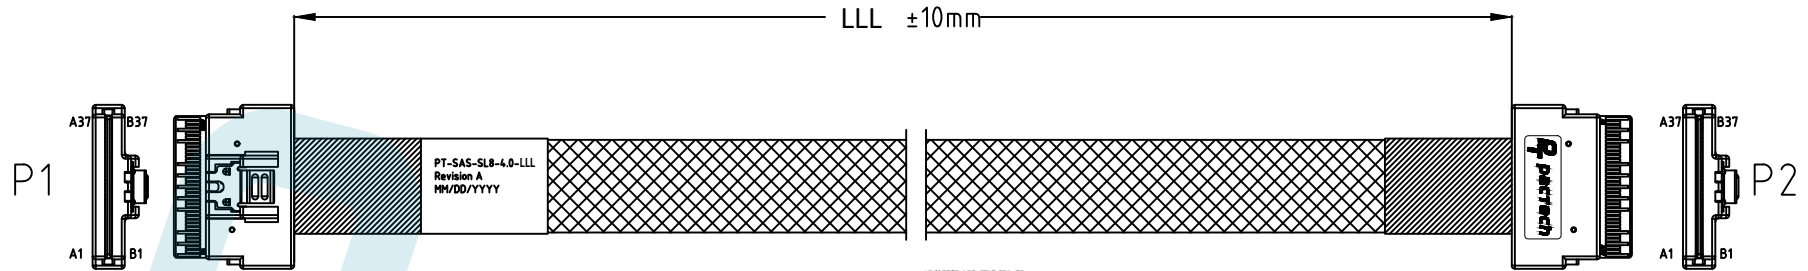

WIRING TABLE

P1		P2		P1		P2	
CONN	Pin	Pin	CONN	CONN	Pin	Pin	CONN
TR1	A2	B2	TR1	TR1	B2	A2	GND
TR2	A3	B3	TR2	TR2	B3	A3	GND
TR3	A4	B4	TR3	TR3	B4	A4	GND
TR4	A5	B5	TR4	TR4	B5	A5	GND
TR5	A6	B6	TR5	TR5	B6	A6	GND
TR6	A7	B7	TR6	TR6	B7	A7	GND
TR7	A8	B8	TR7	TR7	B8	A8	GND
TR8	A9	B9	TR8	TR8	B9	A9	GND
TR9	A10	B10	TR9	TR9	B10	A10	GND
TR10	A11	B11	TR10	TR10	B11	A11	GND
TR11	A12	B12	TR11	TR11	B12	A12	GND
TR12	A13	B13	TR12	TR12	B13	A13	GND
TR13	A14	B14	TR13	TR13	B14	A14	GND
TR14	A15	B15	TR14	TR14	B15	A15	GND
TR15	A16	B16	TR15	TR15	B16	A16	GND
TR16	A17	B17	TR16	TR16	B17	A17	GND
TR17	A18	B18	TR17	TR17	B18	A18	GND
TR18	A19	B19	TR18	TR18	B19	A19	GND
TR19	A20	B20	TR19	TR19	B20	A20	GND
TR20	A21	B21	TR20	TR20	B21	A21	GND
TR21	A22	B22	TR21	TR21	B22	A22	GND
TR22	A23	B23	TR22	TR22	B23	A23	GND
TR23	A24	B24	TR23	TR23	B24	A24	GND
TR24	A25	B25	TR24	TR24	B25	A25	GND
TR25	A26	B26	TR25	TR25	B26	A26	GND
TR26	A27	B27	TR26	TR26	B27	A27	GND
TR27	A28	B28	TR27	TR27	B28	A28	GND
TR28	A29	B29	TR28	TR28	B29	A29	GND
TR29	A30	B30	TR29	TR29	B30	A30	GND
TR30	A31	B31	TR30	TR30	B31	A31	GND
TR31	A32	B32	TR31	TR31	B32	A32	GND
TR32	A33	B33	TR32	TR32	B33	A33	GND
TR33	A34	B34	TR33	TR33	B34	A34	GND
TR34	A35	B35	TR34	TR34	B35	A35	GND
TR35	A36	B36	TR35	TR35	B36	A36	GND
TR36	A37	B37	TR36	TR36	B37	A37	GND
TR37	A38	B38	TR37	TR37	B38	A38	GND
TR38	A39	B39	TR38	TR38	B39	A39	GND
TR39	A40	B40	TR39	TR39	B40	A40	GND
TR40	A41	B41	TR40	TR40	B41	A41	GND
TR41	A42	B42	TR41	TR41	B42	A42	GND
TR42	A43	B43	TR42	TR42	B43	A43	GND
TR43	A44	B44	TR43	TR43	B44	A44	GND
TR44	A45	B45	TR44	TR44	B45	A45	GND
TR45	A46	B46	TR45	TR45	B46	A46	GND
TR46	A47	B47	TR46	TR46	B47	A47	GND
TR47	A48	B48	TR47	TR47	B48	A48	GND
TR48	A49	B49	TR48	TR48	B49	A49	GND
TR49	A50	B50	TR49	TR49	B50	A50	GND
TR50	A51	B51	TR50	TR50	B51	A51	GND
TR51	A52	B52	TR51	TR51	B52	A52	GND

Test Conditions:

- 100% Open and Short and Miss-wiring and Intermittence Test
- Conductive Resistance: 3Ω Maximum
- Insulation Resistance: 10MΩ
- Hi-Pot Test: 300VDC for 10ms
- SAS standard Meets SAS 4.0 (22.5G)

ITEM NO.	LENGTH (LLL)
PT-SAS-SL8-4.0-200	200mm ± 15
PT-SAS-SL8-4.0-250	250mm ± 15
PT-SAS-SL8-4.0-500	500mm ± 15
PT-SAS-SL8-4.0-650	650mm ± 15
PT-SAS-SL8-4.0-750	750mm ± 15
PT-SAS-SL8-4.0-1000	1000mm ± 15

APPROVED BY _____
 COMPANY: _____
 PURCHASING/ENGINEER: _____
 DATE: _____

8	Acetate Tape	W=25mm Acetate Tape, Black	AR
7	Acetate Tape	W=15mm Acetate Tape, Black	AR
6	Weave	W=20mm Plastic Braid Sleeve, PET, Black	AR
5	Rivet	SFF-8654 Rivet SUS304	4
5	Latch	SFF-8654 Latch SUS301 1/2H	2
4	Cover	SFF-8654 8i Cover PA4T, Black, UL94V-0	2
3	Inner Mold	Hof Melt Plastic Black, UL94V-0	AR
2	PCB	SFF-8654 8i Straight PCB Au 30µin	2
1	SAS Cable	SAS 4.0 Cable (30 AWG*2C+2D) 92Ω	AR
ITEM	P/N	DESCRIPTION	QTY

BILL OF MATERIALS

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH SHALL NOT BE REPRODUCED, TRANSFERRED, TO OTHER DOCUMENTS, DISCLOSED OR USED FOR ANY OTHER PURPOSE WITHOUT PRIOR WRITTEN PERMISSION OF PACTECH



DESCRIPTION
 SlimSAS SFF-8654 Straight 8i to SlimSAS SFF-8654 Straight 8i SAS 4.0 cables

CUSTOMER PART NUMBER

DRAWN BY Man Hin Wong	CHECKED BY A. Liu	SIZE A	PART NUMBER PT-SAS-SL8-4.0-LLL	REV A
APPROVED BY A. Chui	UNIT Millimeter	SCALE	SHEET Page 1/1	