

175022-1 ✓ ACTIVE

Positive Lock | Positive Lock 250


TE Internal #: 175022-1

Quick Disconnects, Receptacle, 18 – 14 AWG Wire Size, .82 – 2.08 mm² Wire Size, Mating Tab Width 6.35 mm [.25 in], Straight, Brass, Positive Lock 250

[View on TE.com >](#)



Terminals & Splices > Quick Disconnects

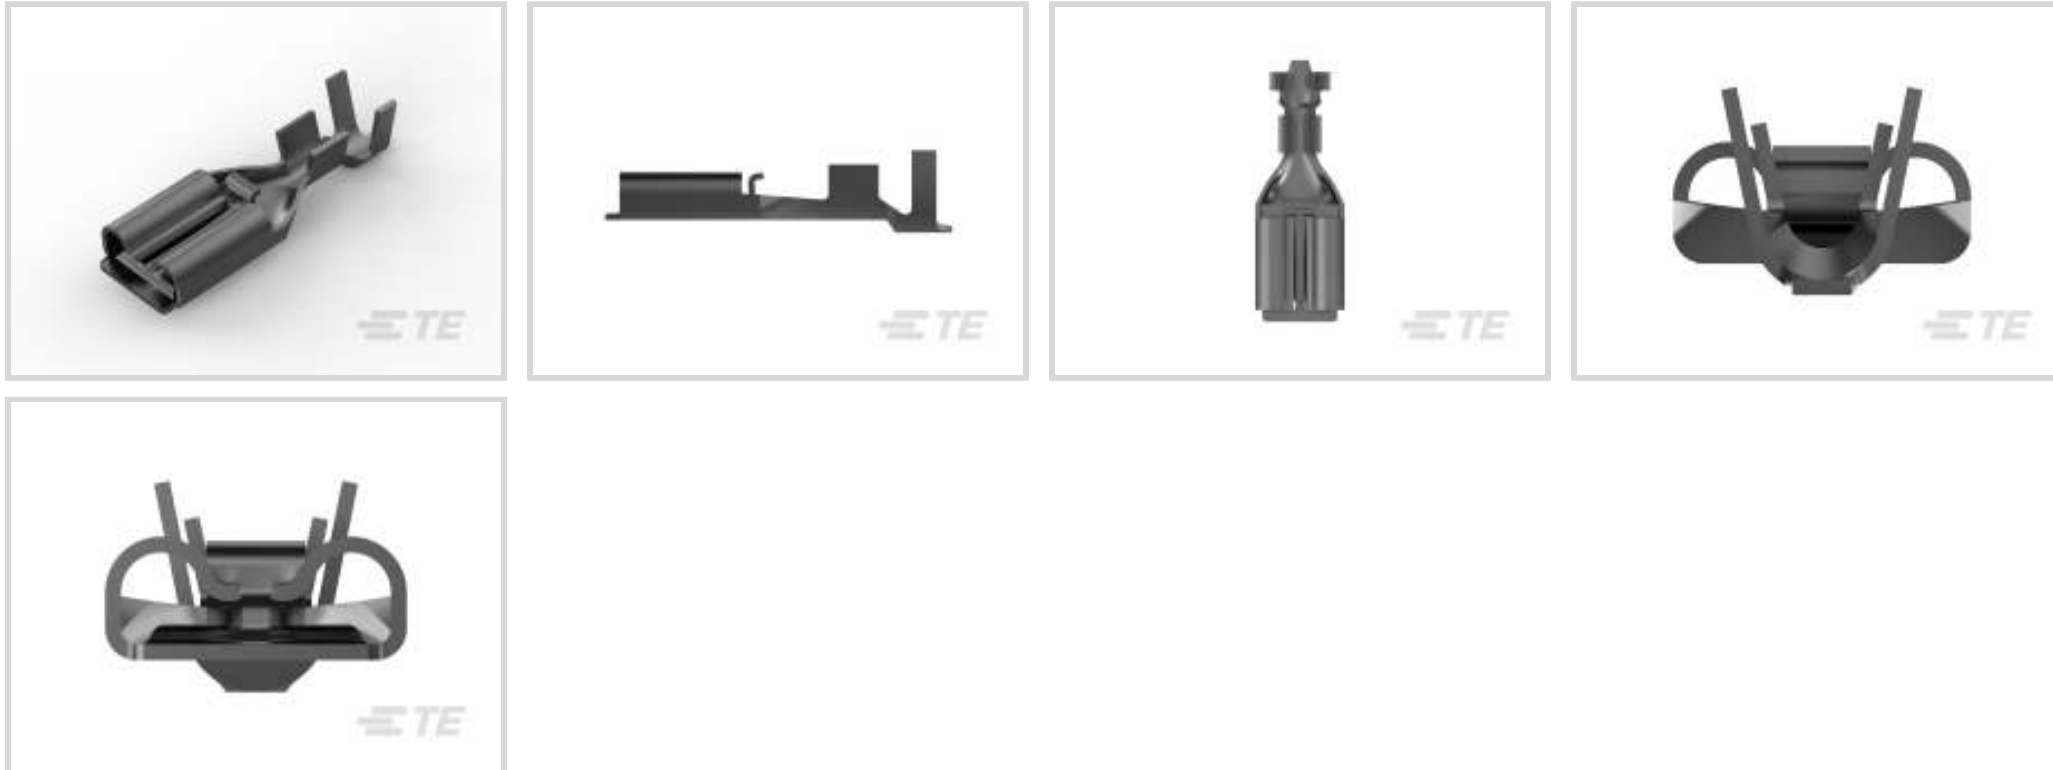

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.82 – 2.08 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Configuration Features

| | |
|-----------------------------------|---------------|
| Connection Capacity | Single |
| Compatible With Wire & Cable Type | Discrete Wire |

Electrical Characteristics

| | |
|----------------|-------|
| Voltage Rating | 250 V |
|----------------|-------|

Contact Features

| | |
|--------------------------------|------------------|
| Quick Disconnect Terminal Type | Receptacle |
| Mating Tab Width | 6.35 mm [.25 in] |
| Mating Tab Thickness | .81 mm [.032 in] |
| Terminal Orientation | Straight |
| Contact Base Material | Brass |
| Terminal Plating Material | Pre-Tin |
| Crimp Type | F-Crimp |
| Barrel Type | Open |

Termination Features



| | |
|-----------------------|--------------|
| Product Terminates To | Wire & Cable |
|-----------------------|--------------|

Mechanical Attachment

| | |
|-------------------------|------|
| Wire Insulation Support | With |
|-------------------------|------|

Dimensions

| | |
|--------------------------------------|------------------------------|
| Terminal Material Thickness | .41 mm[.016 in] |
| Product Length | 21.2 mm[.834 in] |
| Compatible Insulation Diameter Range | 2.2 – 3.4 mm[.086 – .133 in] |
| Wire Size | .82 – 2.08 mm ² |

Usage Conditions

| | |
|-----------------------------|----------------------------|
| Insulation Option | Uninsulated |
| Operating Temperature Range | -40 – 110 °C[-40 – 230 °F] |

Packaging Features

| | |
|--------------------|------------|
| Packaging Quantity | 4500 |
| Packaging Method | Strip/Reel |

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

| | |
|---|---|
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC |
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| Solder Process Capability | Not applicable for solder process capability |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits

as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts





TE Part # 2-1393250-2
W28-XQ1A-0.75=W28



TE Part # 2-1393250-3
W28-XQ1A-1=W28-




TE Part # 3-1393250-1
W28-XQ1A-16=W28




TE Part # 3-1393250-2
W28-XQ1A-2=W28-


Also in the Series | Positive Lock 250

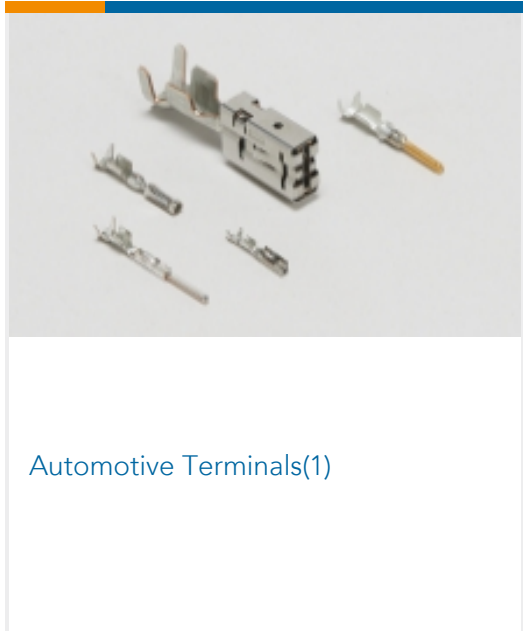

Automotive Terminals(1)

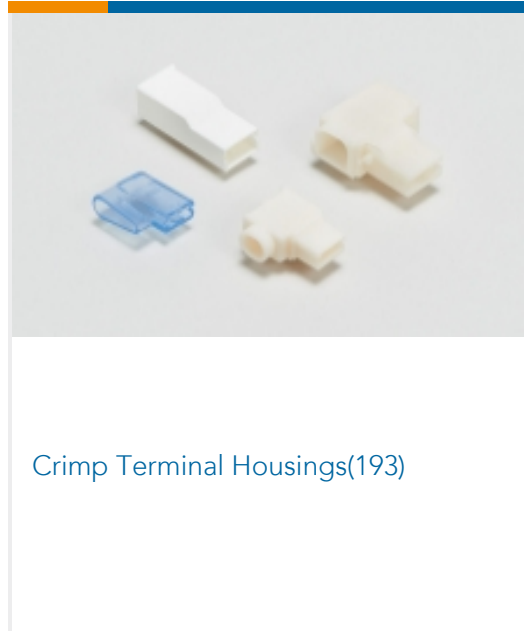


Crimp Terminal Housings(193)

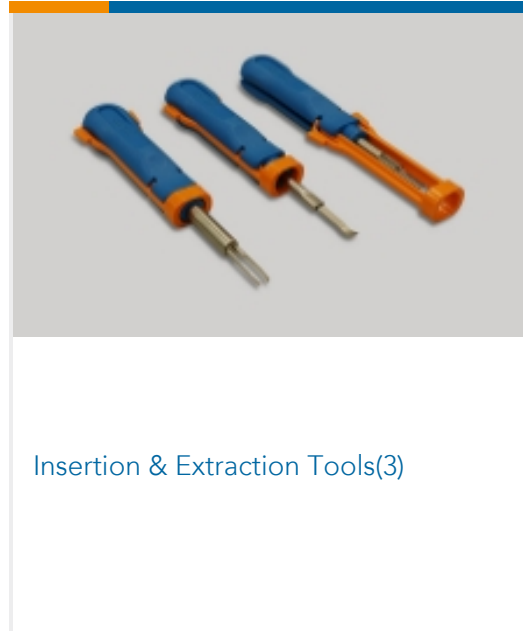

Insertion & Extraction Tools(3)



Insulation Boots & Sleeves(4)

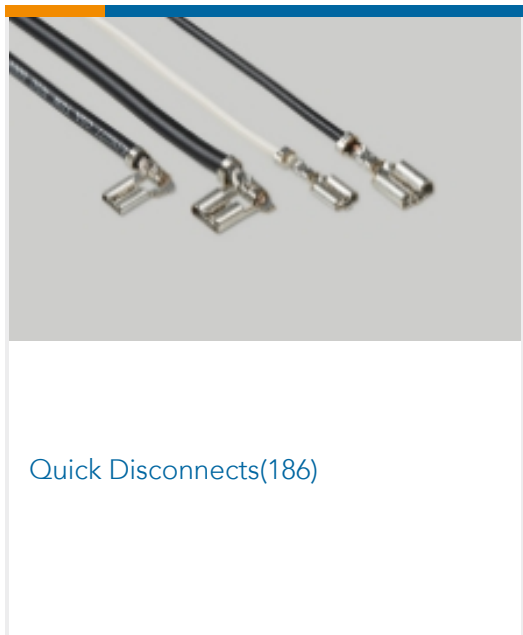

Quick Disconnects(186)


Customers Also Bought



TE Part #4-1123823-1
EP 1P PLUG RED




TE Part #1-282002-6
MONO-SHAPE MK I TAB CONN ASSY

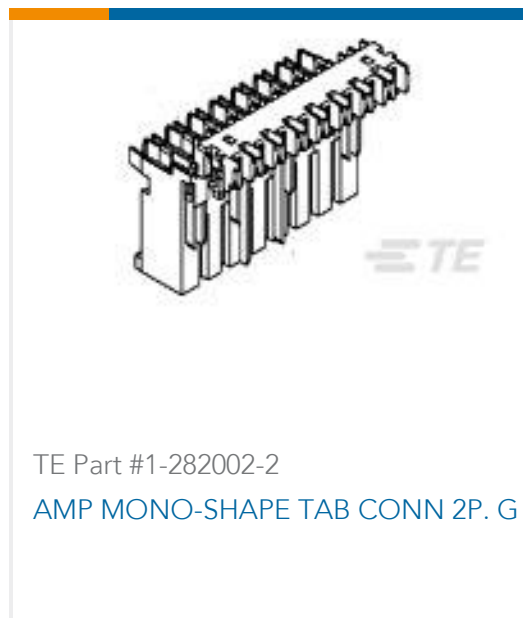


TE Part #1-282002-2
AMP MONO-SHAPE TAB CONN 2P. G




TE Part #1-282003-6
AMP MONO-SHAPE TAB CONN

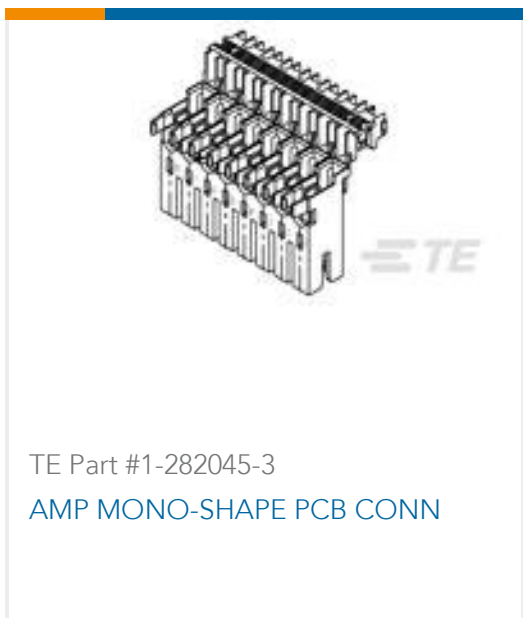

TE Part #1-282045-3
AMP MONO-SHAPE PCB CONN

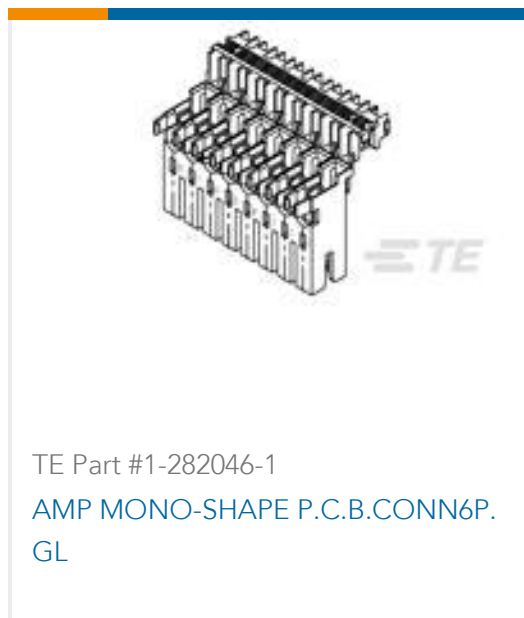

TE Part #1-282046-1
AMP MONO-SHAPE P.C.B.CONN6P. GL

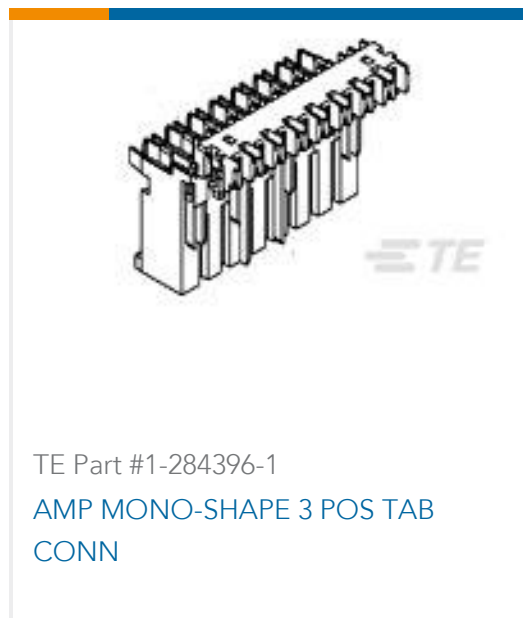

TE Part #1-284396-1
AMP MONO-SHAPE 3 POS TAB CONN



TE Part #1217133-4
187 FASTON,PCB TAB,TNBR



Documents

Product Drawings

[250 PL EX REC. 18-14AWG PTBR](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_175022-1_L_c-175022-1-l.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_175022-1_L_c-175022-1-l.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_175022-1_L_c-175022-1-l.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

English

Product Environmental Compliance

[MD_175022-1_11122018846_dmtec](#)

English

[MD_175022-1_11122018846_dmtec](#)

English

Instruction Sheets

[Instruction Sheet \(non U.S.\)](#)

English

[POSITIVE LOCK EX CONTACT](#)

English

Agency Approvals

[Agency Approval Document](#)



English