

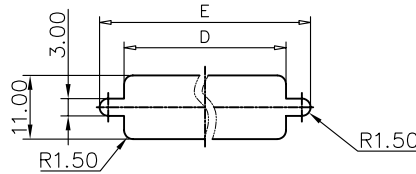

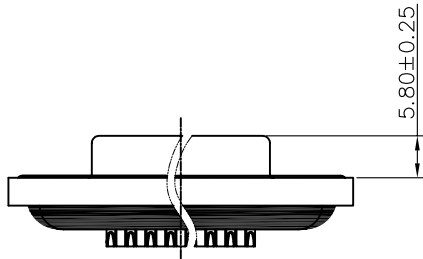
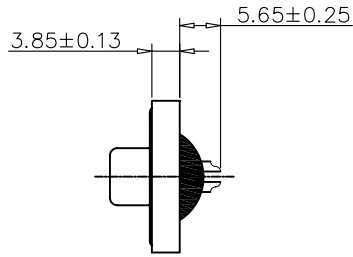


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

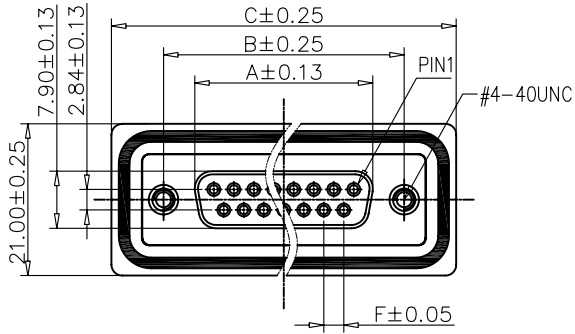

RECOMMENDED PANEL CUT-OUT

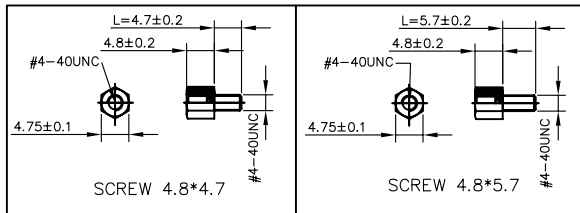

Customer drawing

POSITION	A	B	C	D	E	F(PITCH)
9	16.24	24.99	39.40	20.00	28.20	2.74
15	24.60	33.32	47.70	28.00	36.50	2.74
25	38.38	47.04	64.50	41.50	51.00	2.77
37	54.76	63.50	80.78	57.80	67.30	2.77

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1		New release	06/22/10	IP

D-SUB TECHNICAL DATA

SHELL : Steel, 1.25um(50u") min nickel
 BODY : Glass filled thermoplastic.
 flame retardant to UL94 V-0 color Black
 PLATE : Glass filled thermoplastic.
 flame retardant to UL94 V-0 color Black
 CONTACTS : Brass, gold over 50u" min nickel.(According to the P/N)
 SCREWLOCK : Brass, 50u" min nickel
 REAR INSERT : Brass, 50u" min nickel
 O RING : Silicone Color: Blue
 EPOXY: Color: Black 300 V RMS at 50 Hz
 ELECTRICAL : Voltage rating :
 Current rating : 5A
 Insulation resistance >5000 M Ohms
 Contact resistance 20mOhms max.
 MARKING : Amphenol logo
 Manufacturing date(YWW)



NOTE : Screw L=4.7 For Panel Thickness
 Under X=1.2mm
 Screw L=5.7 For Panel Thickness
 Between X=1.2~2.0mm

PRODUCT CODE

L 17ED XX S 0 X

L: RoHS Compliance

17ED:
standard density series

Number of contacts
Standard density:
09, 15, 25, 37

Contact plating:
0: gold flash
1: 0.38um(15u")
2: 0.76um(30u")

Termination:
0: Solder cup

Contact type
S: Socket

UNLESS OTHERWISE SPECIFIED TOLERANCES U.S. METRIC	APPROVAL	DATE
	DRAWN Lamon He	06/22/10
	CHECKED Lak Wang	06/22/10
	CHECKED	
FOR MATERIALS AND FINISHES SEE NOTES	DRAWING FILE :	
	ANGLE OF PROJECTION	
REMOVE SHARP EDGES		
DIMENSIONS		
U.S. INCHES		
METRIC	MM	

Amphenol		
Amphenol East Asia Limited		
TITLE D-sub Waterproof, ED series female Solder cup type		
SIZE	DRAWING NO.	REV.
A4	C L17EDXXS0X	1
SCALE	NONE	SHEET 1 OF 1