

Voltage reducer module for insulation monitoring relay 3UG4583 for expanding the supply voltage range to 690 V AC and 1000 V DC screw terminal

product brand name	SIRIUS
product designation	Voltage reducer module
General technical data	
product function	Converter module
type of voltage	
• for monitoring	AC/DC
• of the operating voltage for actuation	AC/DC
• of the control supply voltage	AC/DC
surge voltage resistance rated value	8 000 V
protection class IP	IP20
reference code according to IEC 81346-2	K
Substance Prohibition (Date)	05/01/2012
Measuring circuit	
measurable line frequency	15 ... 400 Hz
measurable voltage at AC	690 ... 0 V
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NC contacts delayed switching	0
number of NO contacts for auxiliary contacts	0
number of NO contacts delayed switching	0
number of CO contacts	
• delayed switching	0
Main circuit	
operating frequency rated value	15 ... 400 Hz
Connections/ Terminals	
product component removable terminal for auxiliary and control circuit	No
type of electrical connection	screw-type terminals
type of connectable conductor cross-sections	
• solid	2x (0.75 ... 2.5 mm ²)
• finely stranded with core end processing	2x (0.75 ... 2.5 mm ²)
connectable conductor cross-section	
• solid	0.75 ... 2.5 mm ²
• finely stranded with core end processing	0.75 ... 2.5 mm ²
AWG number as coded connectable conductor cross section	
• solid	20 ... 12
• stranded	18 ... 14
tightening torque with screw-type terminals	0.6 ... 0.8 N·m

Installation/ mounting/ dimensions	
mounting position	any
fastening method	snap-on fastening on 35 mm standard rail
height	78 mm
width	45 mm
depth	100 mm
required spacing	
<ul style="list-style-type: none"> • with side-by-side mounting <ul style="list-style-type: none"> — forwards 0 mm — backwards 0 mm — upwards 0 mm — downwards 0 mm — at the side 0 mm • for grounded parts <ul style="list-style-type: none"> — forwards 0 mm — backwards 0 mm — upwards 0 mm — at the side 0 mm — downwards 0 mm • for live parts <ul style="list-style-type: none"> — forwards 0 mm — backwards 0 mm — upwards 0 mm — downwards 0 mm — at the side 0 mm 	

Ambient conditions	
ambient temperature during operation	-25 ... +60 °C

Certificates/ approvals

General Product Approval	EMC	Declaration of Conformity
--------------------------	-----	---------------------------



[Confirmation](#)



Declaration of Conformity	Marine / Shipping	other
---------------------------	-------------------	-------



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UG4983-1A>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UG4983-1A>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<https://support.industry.siemens.com/cs/ww/en/ps/3UG4983-1A>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UG4983-1A&lang=en

Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3UG4983-1A/manual>

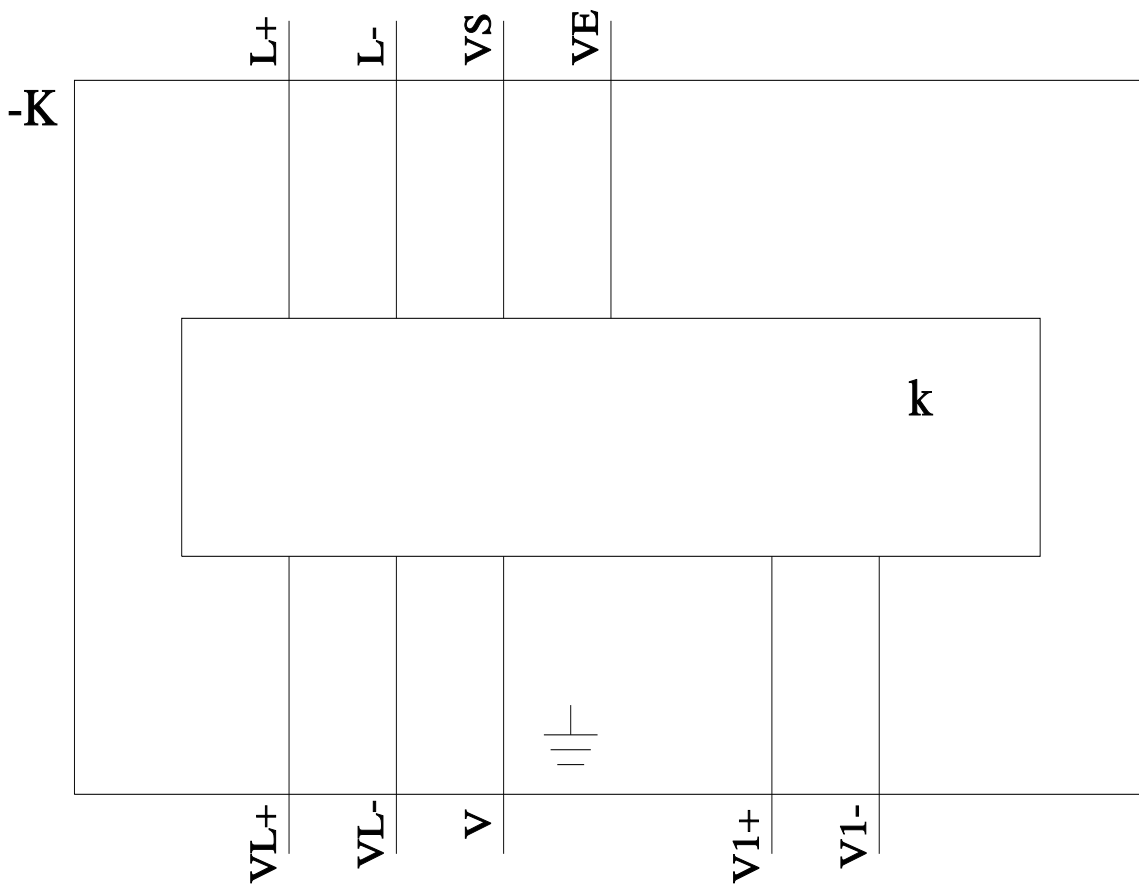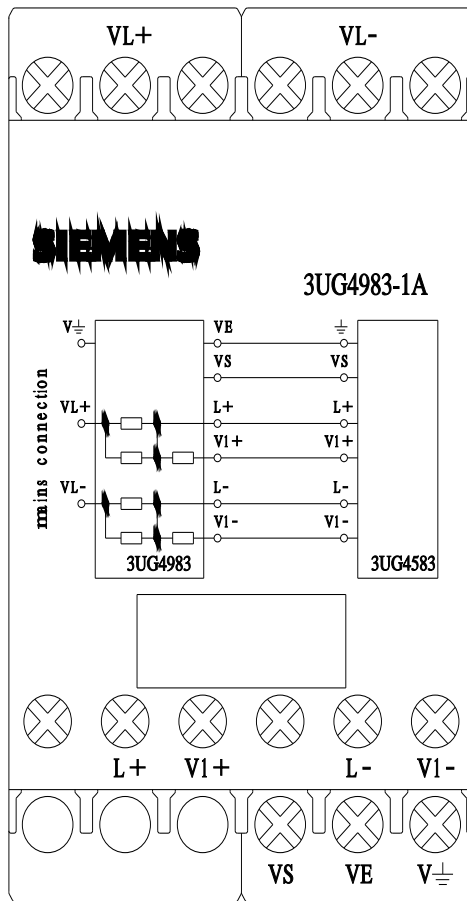

last modified:

9/14/2021