


REVISIONS								
REV	ECO	DESCRIPTION	DATE	BY	APPR			
A1	-	RELEASE NEW DRAWING	28MAR22	VITO	TOMMY			
A2	-	REVISE THE VIEWS	1/MAR/23	VITO	TOMMY			



NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:

HOUSING: THERMOPLASTIC; BLACK

SEAL: SILICONE RUBBER

THREADED INSERT: STAINLESS STEEL

2. MODIFICATIONS: BACKSHELL RING ADAPTER (BRA);

STANDARD DIA. WIRE SEAL. SEALED PANEL MOUNT:


## 3. SPECIFICATIONS:

- 3.1 OPERATING TEMPERATURE: -55°C TO +125°C.
- 3.2 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
- 3.3 INSULATION RESISTANCE: 1000 MEGOHM MIN @ 25°C.
- 3.4 MOISTURE RESISTANCE:


IP68(IM OF WATER FOR A PERIOD OF 24 HOURS.MATED CONDITION);

IP69K (MATED CONDITION)

- 3.5 MATING CYCLE DURABILITY: 100 CYCLES
- 3.6 RoHS COMPLIANT
- 4. MATING PART: AHDP06-18-06P\* (\* = SEAL TYPE) ( C030 OPTION)
- 5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.




CONTACT SIZE	MIN. INSUL O.D.	_	TYPICAL WIRE RANGE	CURRENT RATING
4	6.63 mm (.261in)	7.41mm (.292 in)	6 AWG (16-13mm²)	100 AMPS

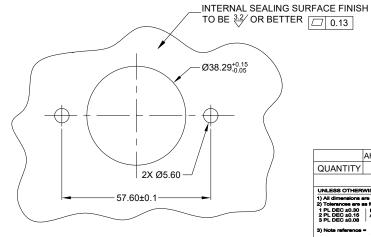

RECOMMENDED PANEL MOUNTING HOLE

RECOMMENDED PANEL THICKNESS:1.6 TO 4.7MM



SIGNATURES DATE

BACKSHELL RING ADAPTER -GREEN

AHDP02-18-06SN-BRAC030 PART NUMBER DESCRIPTION ITEM QUANTITY **MATERIALS LIST** 

1 PL DEC ±0.30   Fractions ±1/64	VIIO.LI	1/MAR/23	
2 PL DEC ±0.15 3 PL DEC ±0.08	CHECKED: SULLENZHANG	02/MAR/22	
) Note reference = X	ENGINEER:		
MATERIAL SPECIFICATIONS:	APPROVAL: TOMMYXIE	03/MAR/22	H
WEIGHT: 52.7g	CUSTOMER:		١.
J	THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SILBIECT TO NORMAI		
PROCESS SPECIFICATIONS:			
IEXT ASS'Y:	MANUFACTURING VARIATIONS		SC

UNLESS OTHERWISE SPECIFIED

**Amphenol** Sine Systems - www.amphenol-sine.com 44724 Morley Drive

Clinton Township, MI 48036

2POS, RECEPT, SOCKET, PANELMATE AHDP SIZE 18, NORMAL SEAL, BRA, C030

AHDP02-18-06SN-BRAC030 CALE: NONE DURAMATE SHEET 1 OF 1 290S, RECEPT, SOCKET, PANELMATE AHDP SIZE 18, NORMAL SEAL, BRA, C030

AHDP02-18-06SN-BRAC030 REV

2