


DATE	REV	ECN	APP'D. BY
5/29/19	A0	RELEASED	-
10/15/20	A1	11639	JE

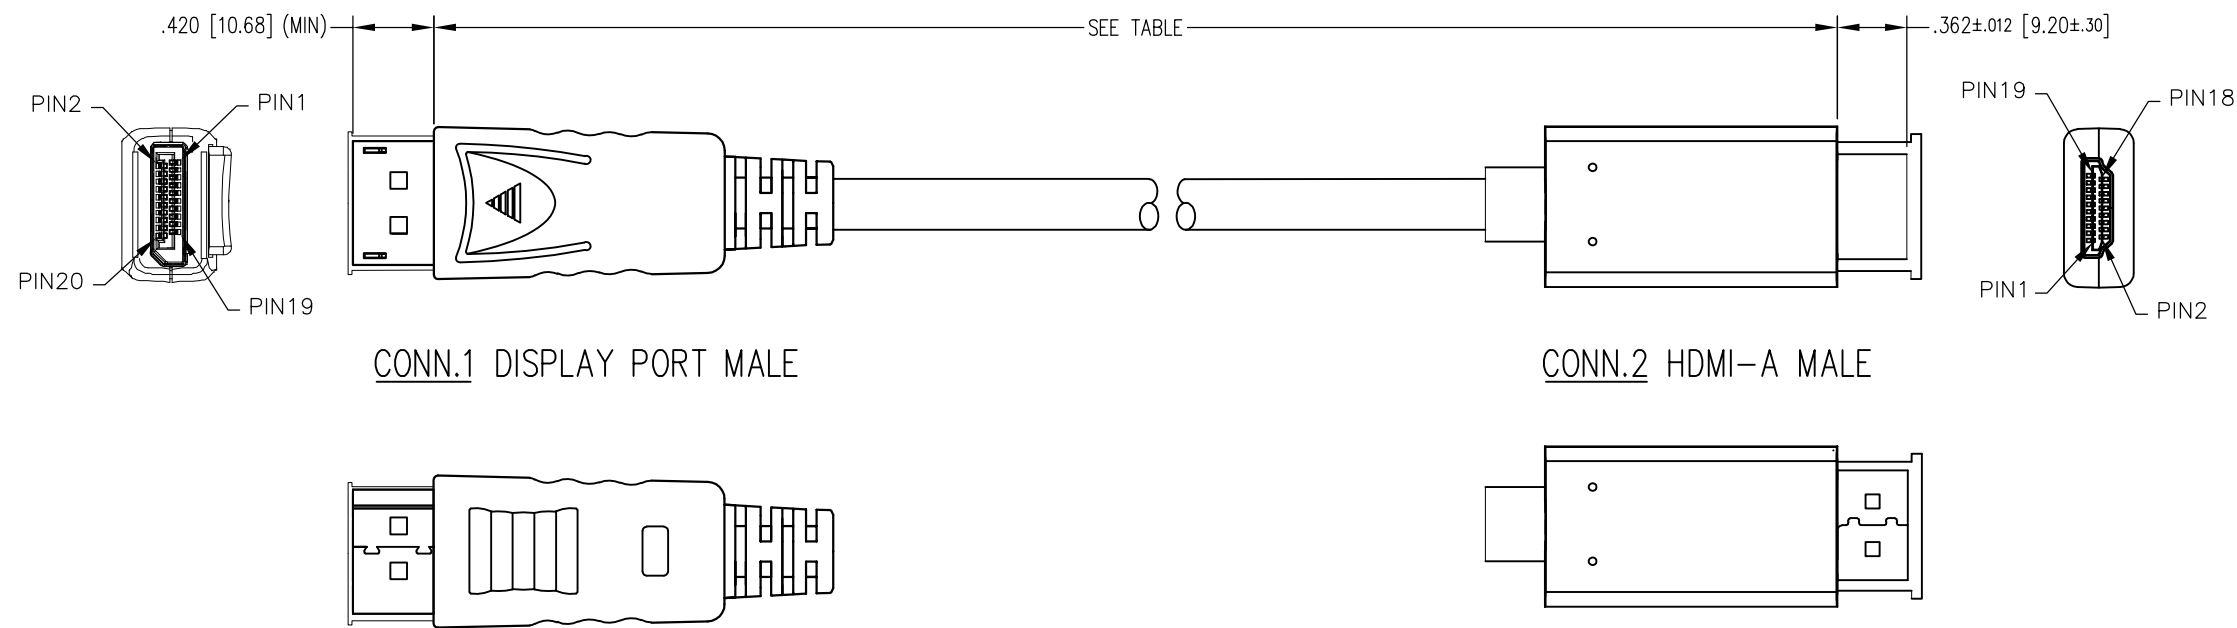


CONN.1 DISPLAY PORT MALE



CONN.2 HDMI-A MALE

NOTES:

- SUPPORTS DISPLAYPORT 1.2a INPUT AND HDMI 1.4b OUTPUT.
- CONNECTOR COMPONENTS:  
 TRANSPARENT DUST COVER  
 INSIDE MOLDING: PE  
 STRAIN RELIEF MOLDING: 45P PVC, BLACK  
 OUTSIDE MOLDING:  
   DISPLAY PORT: ABS, BLACK  
   HDMI-A: 45P PVC, BLACK  
 SHELL PLATING: GOLD FLASH  
 CONTACT: GOLD PLATING  
 DISPLAY PORT CABLE UL20276 (7/0.127TA\*PR+EAM)  
   \*5+7/0.127TA\*5C+AEB 85% OD:.29 [7.3] BLACK
- ELECTRICAL TESTING:  
 100% OPEN & SHORT & CONTINUITY WIRE TEST  
 CONTACT RESISTANCE: 6 OHM(MAX)  
 INSULATION RESISTANCE: 10M OHM(MIN)  
 HI-POT TEST: DC 100V/10ms
- PACKAGING  
 ONE CABLE PER BAG

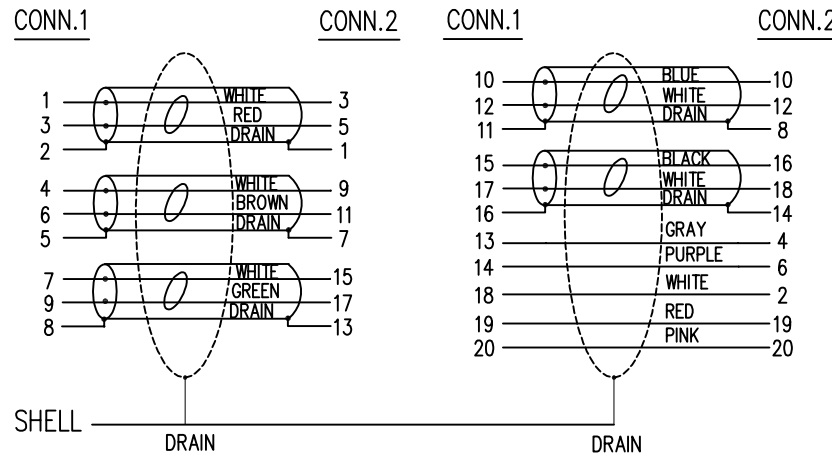

P/N	LENGTH
BC-DH003F	36±1.2 [915±30]
BC-DH006F	72±1.2 [1830±30]
BC-DH010F	120±1.6 [3050±40]



THIRD ANGLE PROJECTION		206 Van Vorst Street Jersey City, NJ 07302 +1 201 432 0463 <a href="http://www.belfuse.com">http://www.belfuse.com</a>	
DO NOT SCALE DRAWING DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE		TITLE: DISPLAY PORT MALE TO HDMI-A MALE CABLE	
DIMENSIONS: INCHES [METRIC]	THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF BEL FUSE, INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF BEL FUSE, INC.	DRN BY: JMM	DATE: 05/16/19
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13] ANGLES ARE ± 1°		APPD BY: ADB	DATE: 05/29/19
SHEET NO. 1 OF 1		DWG NO. CT999192	REV. A1

ASSEMBLY FORMAT REV. 6/3/05