


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

Item No.	Part No.	Description
1	SSM-21T-P1.4	Connector Male Contact
2	SSF-21T-P1.4	Connector Female Contact
3	UL1007, 22 AWG	Black

Electrical Specifications
Current: 7.0A AC/DC
Voltage: 300V AC/DC

APPLICABLE HOUSINGS			
HL SERIES			
FOR FEMALE CONTACT		FOR MALE CONTACT	
NO. OF CIRCUITS	HOUSING PART NO.	NO. OF CIRCUITS	HOUSING PART NO.
2	HLP-02V	2	HLR-02V
3	HLP-03V		HLR-02VF
4	HLP-04V	3	HLR-03V
8	HLP-08V	4	HLR-04V
9	HLP-09V		HLR-04VF
12	HLP-12V	8	HLR-08V
-	-	9	HLR-09V
-	-	12	HLR-12V
SL SERIES			
FOR FEMALE CONTACT		FOR MALE CONTACT	
NO. OF CIRCUITS	HOUSING PART NO.	NO. OF CIRCUITS	HOUSING PART NO.
1	SLP-01V	1	SLR-01VF
2	SLP-02V	2	SLR-02VF
3	SLP-03V	3	SLR-03VF
	SLP-03V-MD		SLR-03VF-MD
4	SLP-04V	4	SLR-04VF
6	SLP-06V	6	SLR-06VF
-	-	-	-
-	-	-	-

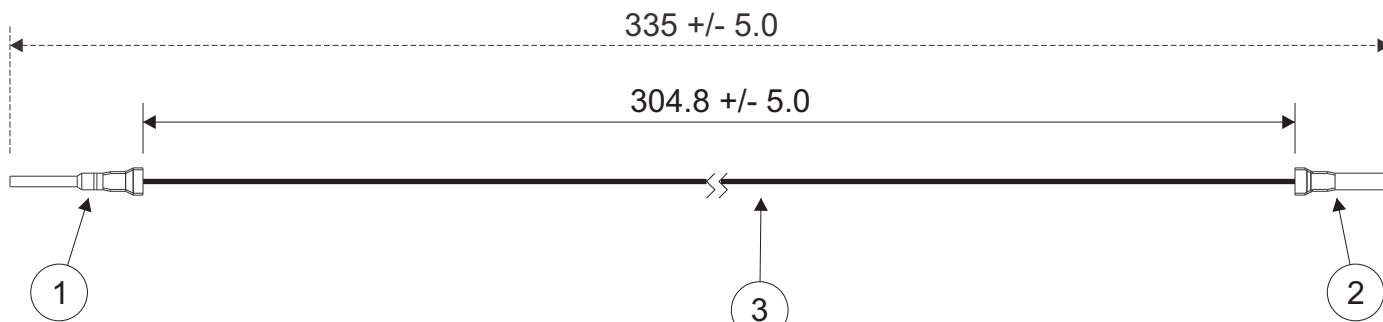

ZONE	REV	DESCRIPTION	DATE	APPROVED
	1	Added SL Series	1/21/2019	LM

All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.		CUSTOMER NAME		
		DESCRIPTION		
		3.96mm Pitch HL & SL Series Standard Leads - 12" Inside Length DOUBLE END LEADS, M-F		
Drawn By: Larissa Mosley	SIZE	CUSTOMER PART NO.	PART NO.	REV
Checked By: Steven Pilkington	SCALE 1:1	ASSMSSF22K305		
	DRAWING NO. GAM-565	DATE 12/13/2018		