

Ratings

Voltage: 300 V
Temperature: -25 to 80 °C
Flammability: VW-1

Conductor

Conductor count: 6
Gauge: 26 AWG 0.14 mm²
Material: tinned copper strands
Strand size: \varnothing 0.16 mm x 7
Resistance at 20 °C: 150 Ω /km max

Insulator

Material: PVC
Color: red, black, white, yellow, blue, green
Diameter: \varnothing 1.1 ±0.10 mm
Nominal thickness: 0.29 mm
Resistance at 20 °C: 10 M Ω /km min



Outer jacket

Material: PVC
Color: white
Diameter: \varnothing 5.2 ±0.30 mm
Nominal thickness: 0.95 mm

Wire marking: E339579 UL AWM STYLE 2464 26 AWG 80°C
300V VW-1 --- cUL AWM I/II A 80°C 300V FT1 TENSILITY

Tests

Insulation tensile strength: 2.11 kgf/mm²
Jacket tensile strength: 1.05 kgf/mm²
After aging at 113 ±2 °C for 7 days:
 Minimum tensile strength 70 % original
 Minimum elongation 65 % original
Heat shock: 121 ±1 °C /1 hour, no observed degradation
Deformation: 121 ±1 °C /1 hour, ≤ 50 %
Cold bend: -10 ±2 °C /1 hour, no observed cracking

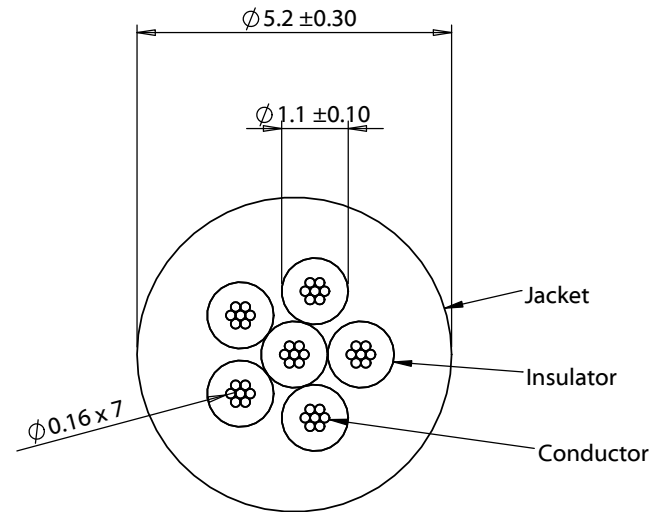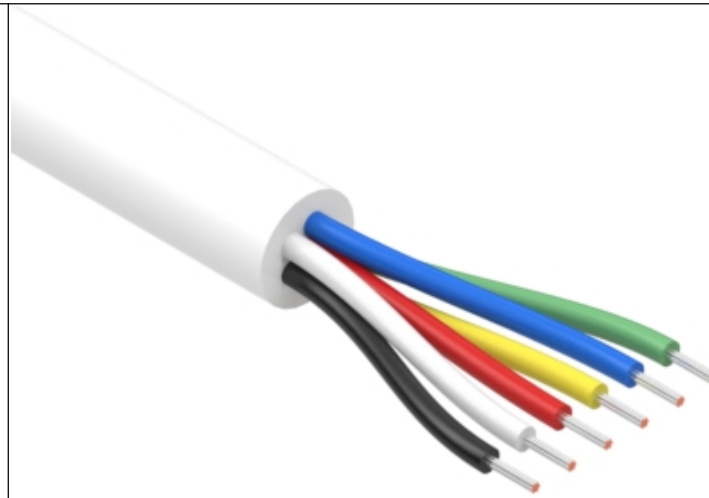

Revision:	Date:	Description:	Prepared:	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	5/16/2019	Initial release	AW <small>Digitally signed by AW Date: 2019.05.16 08:46:53 -07'00'</small>		
			Verified:	Function test: no open, no short circuit, no intermittent	Size: Part number: A 30-01296
			JP <small>Digitally signed by JP Date: 2019.05.17 11:04:45 -07'00'</small>		
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Wire, 6C TS, 26 AWG, UL2464, 300V, 80C, 5.2 mm, VW-1, PVC, 60P, white	Scale: 8:1
					⊙ □
					Sheet 1 of 1