

GloTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: 4 PIN DIN power plug or equal, overmolded and not push pull to Stripped and Tinned ROJ 15±3 mm, RIJ 5±1 mm, GT Cable #2464-4c/18+S: 18 / 4+Shield Conductors, 6mm OD, UL2464, 80 Deg.C, 300V, , Approvals: , 305±10mm, GlobTek Black	
	Model No. Low voltage cable	
	Part No./Ordering No. KPP424640M3A04	Rev A1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification
ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at <https://www.globtek.com/iso-certificates/>
Prop 65 Statement: <https://en.globtek.com/prop-65-statement.pdf>

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek TERMS AND CONDITIONS (attached to the end of this document), which supersede all other agreements, terms, and conditions (<https://en.globtek.com/terms-and-conditions/>).

The purchaser of this product (Customer) agrees that it is their sole responsibility to determine suitability/fitness of the product described in this specification for their application and to take precautions for protection against any hazards attendant to the handling and use of the product.

Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc.
Contents of this document are subject to change without prior notice.

Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing.
A delay in receipt of this form will delay delivery schedule.

Company Name: _____	Customer P/N: _____
Quote Number: _____	Date: _____
Authorized Representative Name: _____	Authorized Representative Signature: _____

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: 4 PIN DIN power plug or equal, overmolded and not push pull to Stripped and Tinned ROJ 15±3 mm, RIJ 5±1 mm, GT Cable #2464-4c/18+S: 18 / 4+Shield Conductors, 6mm OD, UL2464, 80 Deg.C, 300V, , Approvals: , 305±10mm, GlobTek Black	
	Model No. Low voltage cable	
	Part No./Ordering No. KPP424640M3A04	Rev A1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

REVISION HISTORY

REV	DESCRIPTION	SUB	DATE	APPROVED
A1	Change the label dimensions from 20*17mm to 20*22mm	QA	05/26/2023	QA
A	Initial release	QA	12/02/2022	QA

Cordset Information:

CordsetColor:GlobTek Black


Cord Length (mm):305±10

NOTES:

Cord, Plug and Connector must be marked with approval symbols of file number(s)

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: 4 PIN DIN power plug or equal, overmolded and not push pull to Stripped and Tinned ROJ 15±3 mm, RIJ 5±1 mm, GT Cable #2464-4c/18+S: 18 / 4+Shield Conductors, 6mm OD, UL2464, 80 Deg.C, 300V, , Approvals: , 305±10mm, GlobTek Black
	Model No. Low voltage cable
Part No./Ordering No. KPP424640M3A04	Rev A1


CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

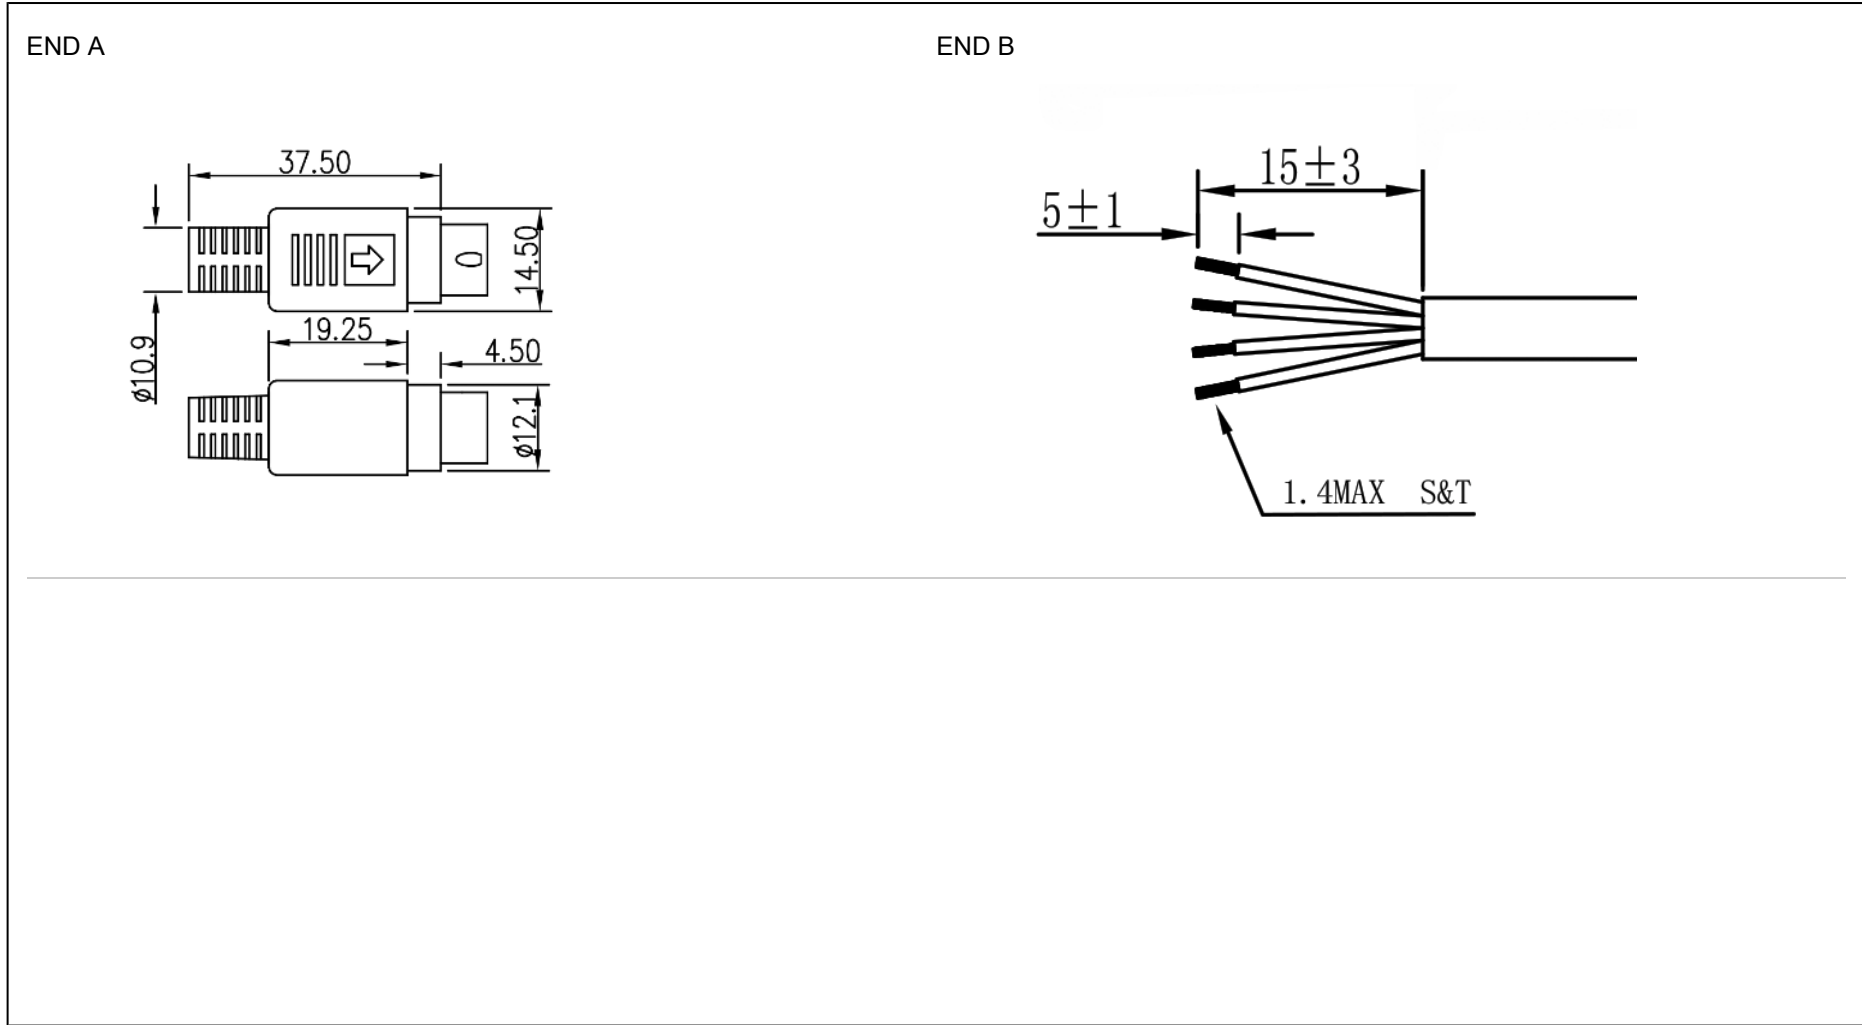

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: 4 PIN DIN power plug or equal, overmolded and not push pull to Stripped and Tinned ROJ 15±3 mm, RIJ 5±1 mm, GT Cable #2464-4c/18+S: 18 / 4+Shield Conductors, 6mm OD, UL2464, 80 Deg.C, 300V, , Approvals: , 305±10mm, GlobTek Black
	Model No. Low voltage cable
Part No./Ordering No. KPP424640M3A04	Rev A1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

CABLE IMAGE

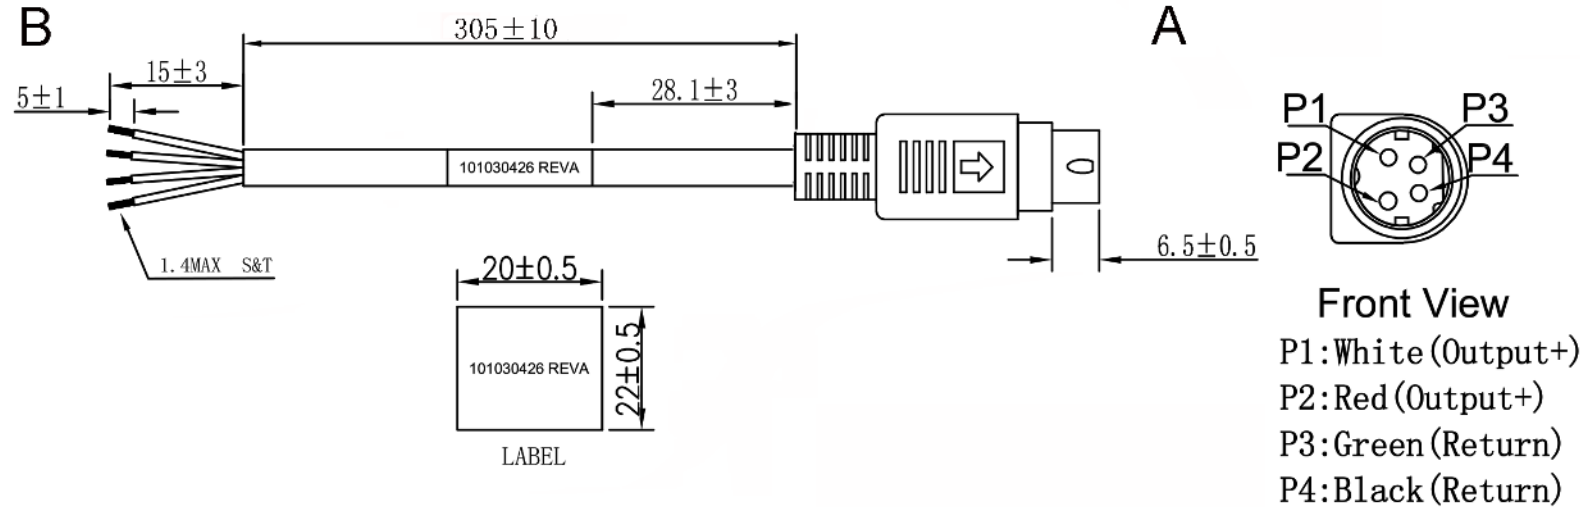

Label material: 20*17 mm (101030426 REV.A) 25# white dragon (or equivalent) which can be pasted on cable Black ground with White font

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: 4 PIN DIN power plug or equal, overmolded and not push pull to Stripped and Tinned ROJ 15±3 mm, RIJ 5±1 mm, GT Cable #2464-4c/18+S: 18 / 4+Shield Conductors, 6mm OD, UL2464, 80 Deg.C, 300V, , Approvals: , 305±10mm, GlobTek Black	
	Model No. Low voltage cable	Part No./Ordering No. KPP424640M3A04

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

End A Code:YL4-2 Description:4 PIN DIN power plug or equal, overmolded and not push pull Rating (V): Rating (A): Gender:Male Overmolded:Yes	Cable Code:2464-4c/18+S Description:GT Cable #2464-4c/18+S: 18 / 4+Shield Conductors, 6mm OD, UL2464, 80 Deg.C, 300V, , Approvals: Color:GlobTek Black Wire Gauge(AWG):18 Cond:4+Shield Type:UL2464 Temperature:80° C Amps:5A/c Volts:300 OD:6 ConductorsColors:	End B Code:A04 Description:Stripped and Tinned ROJ 15±3 mm, RIJ 5±1 mm Rating (V): Rating (A): Gender:N/A Overmolded:No
---	---	---

Overall cable rating:56V and 7.5A per Pin

Plug Approvals	Cable Approvals	Connector Approvals
----------------	-----------------	---------------------



UL RECOGNIZED

AGENCY ONLINE DOCUMENTS	http://en.globtek.com/cordsets/
RoHS/RoHS3 Declaration	https://www.globtek.com/pdf/rohs_cert/01t3a000005gjCkAAI
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.pdf
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf
Prop 65 Statement	https://en.globtek.com/prop-65-statement.pdf
CE.UKCA.Cord	https://globtek.secure.force.com/spec/ec_decl_product_model_family_incl_cord?id=01t3a000005gjCk

IPXY rating is based on 3rd party testing and customers should check suitability and test system level IPXY rating before ordering.

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: 4 PIN DIN power plug or equal, overmolded and not push pull to Stripped and Tinned ROJ 15±3 mm, RIJ 5±1 mm, GT Cable #2464-4c/18+S: 18 / 4+Shield Conductors, 6mm OD, UL2464, 80 Deg.C, 300V, , Approvals: , 305±10mm, GlobTek Black	
	Model No. Low voltage cable	Part No./Ordering No. KPP424640M3A04
		Rev A1

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

Hanking: Bulk, BUNDLE 10
 Description: Bulk Packed in bundles of 10
 Image:
 N/A

Notes/Modifications/Customizations (notes in this section supersede the values shown in the standard spec):