

# SPECIFICATION CONTROL DRAWING

55PC6002

TITLE

ONE CONDUCTOR CABLE, SHIELDED, JACKETED, 600 VOLT


Date

1-25-93

Revision

A

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

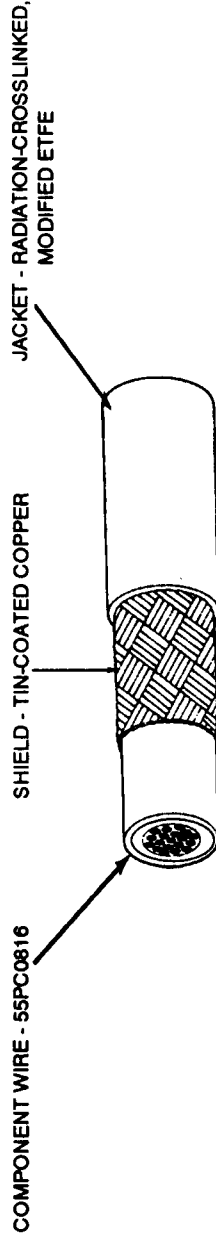

## CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		DIAMETER (in.)		WEIGHT (lbs/1000 ft.)	
			LOWER SPEC LIMIT	TARGET WALL	LOWER SPEC LIMIT	TARGET VALUE	TARGET VALUE	UPPER SPEC LIMIT
55PC6002-24*	24	38	.0050	.0060	.069	.073	5.74	6.04
55PC6002-22*	22	38	.0050	.0060	.075	.079	7.07	7.40
55PC6002-20*	20	38	.0050	.0060	.084	.087	9.14	9.49
55PC6002-18*	18	38	.0050	.0060	.084	.097	12.06	12.51
55PC6002-16*	16	38	.0050	.0060	.102	.105	14.44	14.92

## CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C  
 Maximum continuous conductor temperature  
 VOLTAGE RATING: 600 volts (rms)  
 DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz  
 CROSSLINKING PROOF TEST: 300 ± 3°C for 1 hour  
 JACKET COLOR: White preferred  
 JACKET ELONGATION AND TENSILE STRENGTH:  
 Elongation, 50% (minimum)  
 Tensile Strength, 5000 lb/in<sup>2</sup> (minimum)  
 JACKET FLAWS:  
 Spark Test, 1000 volts (rms), 60 Hz, 100% test  
 Impulse Dielectric Test, 6.0 kV (peak), 100 % test

SHIELD COVERAGE: 85% (minimum)  
 VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):  
 1000 volts (rms), 60 Hz, 1 minute

### PART NUMBER:

The \*\*\* in the part numbers above shall be replaced by a color code designator with a dash separating the component wire color from the jacket color.  
 Example: AWG 22, white component wire, white jacket: 55PC6002-22-9-9

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.



Faraday Road, Dorcan  
 Swindon, Wiltshire SN3 5HH  
 Tel: (0793) 28171 Telex: 449409