


WITH COVER
SCALE: 1:2



RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

PACKING & REEL
0-TAPE & REEL WITH COVER
7-TAPE & REEL WITH COVER

- NOTES:
- MATERIAL: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR:BLACK.
 - CONTACT: HIGH CONDUCTIVITY COPPER ALLOY
 - FINISH:
 - CONTACT: 50u" MIN. NICKEL UNDERPLATING OVERALL.
 - CONTACT: N: 100u" MIN. MATTE TIN OVERALL. 1: GOLD FLASH PLATING ON CONTACT AND MATTE TIN ON SOLDER TAILS OVER.
 - REFLOW SOLDER CAPABLE TO 260°C.
 - PER ACES SPEC.
 - SPEC. PLS. REFER TO PS-57980-XXXXX-XXX
 - PACKAGE PLS. REFER TO 57965-XXXX-XX-TRP
 - PART NUMBER 57965-XXX X X-XXX

PLATING
N: MATTE TIN
1: GOLD FLASH

NO.	DESCRIPTION	WITH COVER-TR
00	57965-XXXXX-XXX-TRP	WITH COVER
001	57965-XXXXX-XXX-TRP	WITH COVER

CKT	DIM A	DIM B	DIM C	DIM D
2	6.65	NA	4.30	
4	9.65	3.00	7.30	6.74
6	12.65	6.00	10.30	
8	15.65	9.00	13.30	
10	18.65	12.00	16.30	
12	21.65	15.00	19.30	
14	24.65	18.00	22.30	
16	27.65	21.00	25.30	1.60
18	30.65	24.00	28.30	
20	33.65	27.00	31.30	
22	36.65	30.00	34.30	
24	39.65	33.00	37.30	

QUALITY SYMBOLS MAJOR Ⓢ CRITICAL Ⓢ GENERAL TOLERANCES (UNLESS SPECIFIED) X ±0.5 XX ±0.25 XXX ±0.15 ANGLES ±2°		DRAWN BY: TangEn Hui CHECKED BY: LuJing Quan DATE: 20/10/16 DATE: 20/10/16 TITLE: 3.0mm PITCH WTB HEADER CONN. TH/D/R/RA TYPE	
UNITS: MM	SHEET NO. 1 OF 2	SCALE: 3:1	REV: C
		PART NO.: N/A DWG NO.: 57965-XXXXX-XXX	



2018.10.25_REV.11

B

C

D

E

F

G

H

J

7

6


5

4

3

2

1

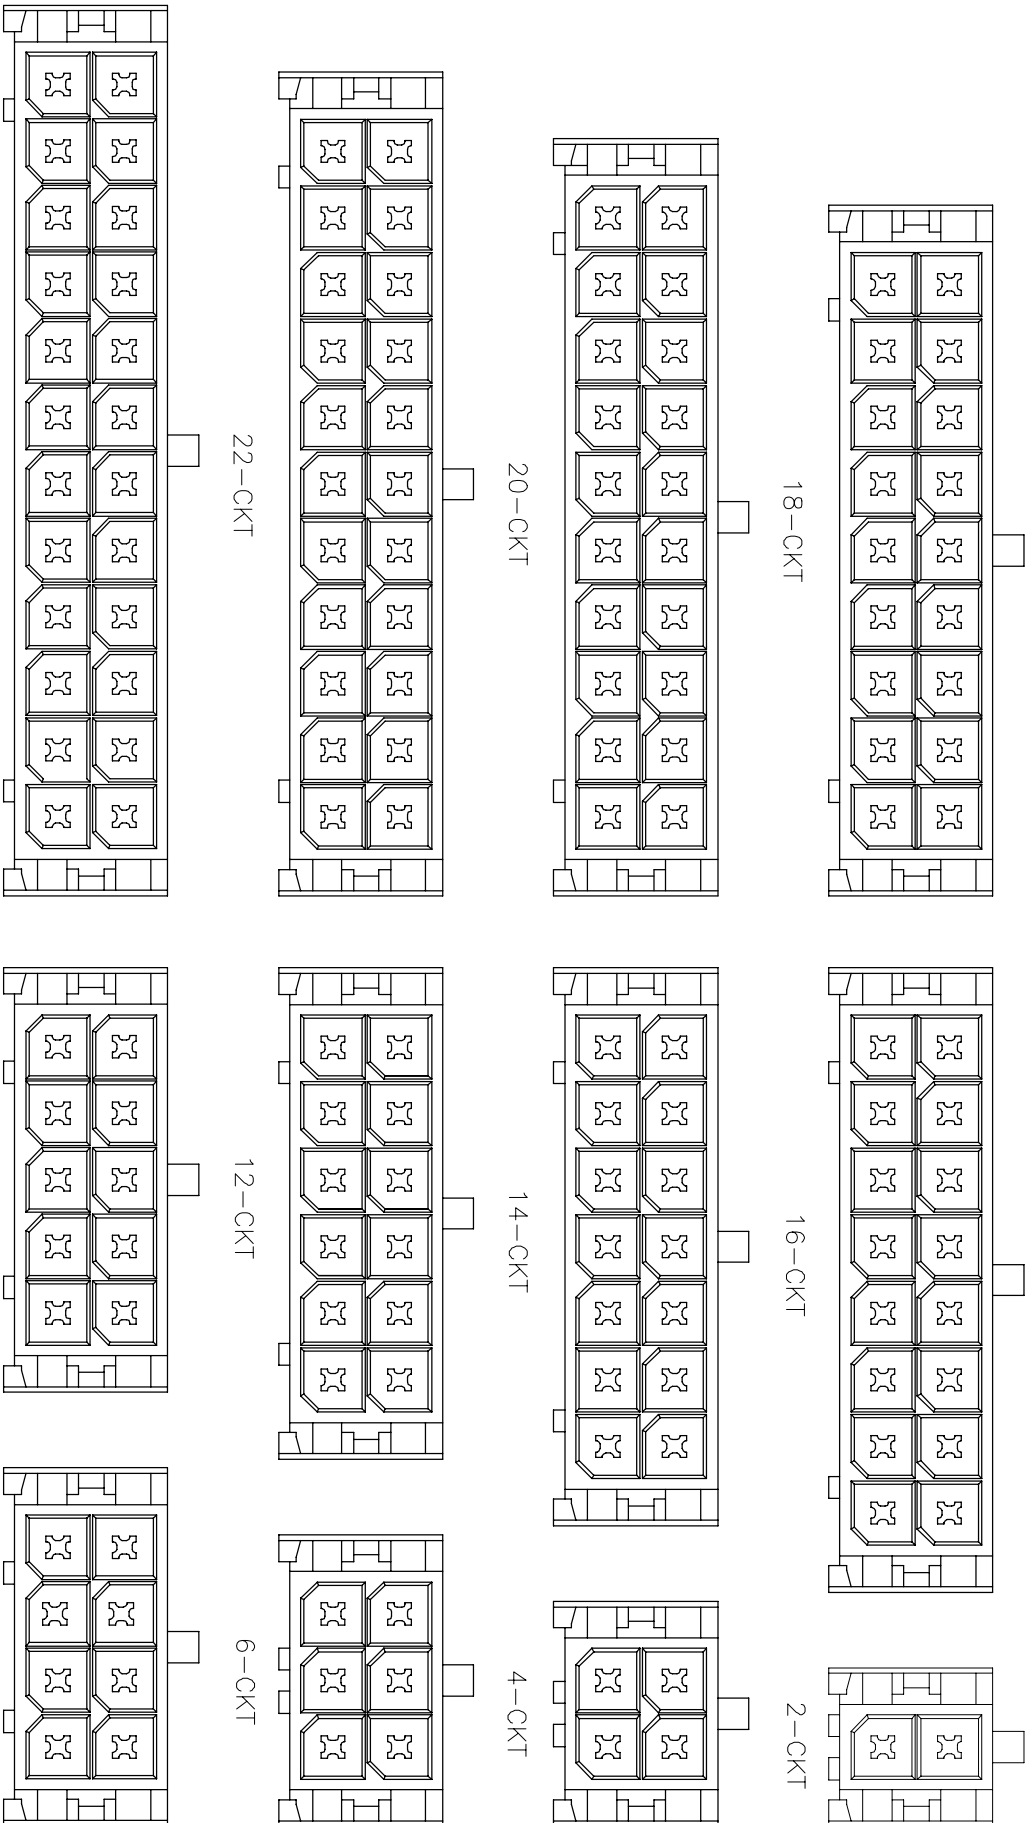

QUALITY SYMBOLS		MAJOR		DATE	
CRITICAL		Tang,En Hld		20/10/16	
(UNLESS SPECIFIED)		CHECKED BY		DATE	
X ±0.5		Lu, Jing Quan		20/10/16	
XX ±0.25		APPROVED BY		DATE	
XXX ±0.15		hsieh, fu yu		20/10/16	
ANGLES ±2°					
		UNITS		SIZE	
		MM		A4	
		SCALE		REV	
		3 : 1		C	
		SHEET NO.		DWG NO.	
		2 OF 2		57985-XXXXX-XXX	
				PROJ. NO.	
				N/A	
				TITLE	
				3.0mm PITCH WTB HEADER	
				CONN. T/H D/R R/A TYPE	
				ACES ELECTRONICS	