


COIL: @ +25 °C	
RESISTANCE	700 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	1.5 VDC

ENVIRONMENT:

VIBRATION	10	CPS TO	2000	CPS @	20	g's
SHOCK	100	g's	6	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES: OPERATE & RELEASE 4 MS MAX.
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

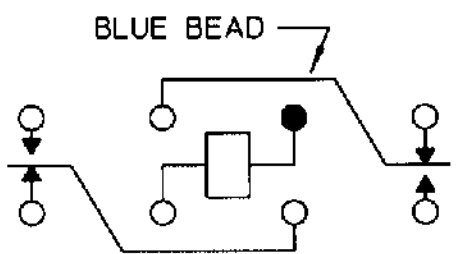

CONTACT RATING: LOW LEVEL TO
5 AMPS 28 VDC RESISTIVE
100,000 OPERATIONS MIN.

DR. R.B. 1/14/98 CK. V14/98



CUST. C. I. I. STD.
CUST. NO.

TYPE HFW5A RELAY

HFW5A1108K00