

# CloudGate



## Smart IOT Gateway

- Transports & Logistics
- Industrial & Remote Asset Monitoring
- Smart Cities & Environmental Monitoring

# CloudGate MODELS



LTE WW



3G US rev 3



3G EMEA rev 3



Ethernet 2.0

<b>WWAN Modem</b>	Supported frequency bands	700/800/850/900/1800/1900/2100/2600/AWS (B 1-5, 7, 8, 13, 17, 18, 19, 20)	Not applicable		
<b>LTE</b>	Max. connectivity speeds	100Mbps down, 50Mbps up (Cat3) Theoretical LTE data rates			
<b>WWAN Modem</b>	Supported frequency bands	<ul style="list-style-type: none"> <li>UMTS/HSDPA/HSUPA/HSPA+: 850/900/1900/2100 MHz and AWS band (1700/2100 MHz) (B 1, 2, 4, 5, 8)</li> <li>GSM/GPRS/EDGE: 850/900/1800/1900 MHz</li> </ul>	<ul style="list-style-type: none"> <li>UMTS/HSDPA/HSUPA/HSPA+: 800-850/900/ 1900/2100 MHz and AWS band (1700/2100 MHz) (B1, 2, 4, 5, 6, 8)</li> <li>CDMA 1xRTT/EV-DO rev0/EV-DO revA: 800/1900 (BC0, BC1)</li> <li>GSM/GPRS/EDGE: 850/900/1800/1900 MHz</li> </ul>	<ul style="list-style-type: none"> <li>UMTS/HSDPA/HSUPA/HSPA+: 900-2100 MHz (B1, 8)</li> <li>GSM/GPRS/EDGE: 900/1900 MHz</li> </ul>	Not included
	Max. connectivity speeds	• DC-HSPA+: 42 Mbps (Cat 24) down 5.76 (Cat 6) up	• HSPA+: 14.4 Mbps (Cat 10) down 5.76 (Cat 6) up • EV-DO RevA mode: 3.1 Mbps FL/1.8 Mbps RL	• HSPA+: 14.4 Mbps (Cat 10) down 5.76 (Cat 6) up	Not included
	Rx Diversity	Simultaneous Equalization and Rx Diversity on all bands	Simultaneous Equalization and Rx Diversity on all bands	Simultaneous Equalization and Rx Diversity on all bands	Not included
<b>WWAN Antenna</b>	Antenna connector	<ul style="list-style-type: none"> <li>1 x SMA: WWAN Main</li> <li>1 x SMA: WWAN Div/GPS</li> </ul>	<ul style="list-style-type: none"> <li>1 x SMA: WWAN Main</li> <li>1 x SMA: WWAN Div/GPS</li> </ul>	<ul style="list-style-type: none"> <li>1 x SMA: WWAN Main</li> <li>1 x SMA: WWAN Div/GPS</li> </ul>	Not included
<b>GPS</b>		<ul style="list-style-type: none"> <li>High sensitivity A-GPS /A-GLONASS receiver (SUPL 1.0 &amp; SUPL 2.0)</li> <li>Active GPS antenna support</li> </ul>	<ul style="list-style-type: none"> <li>Standalone GPS, Assisted GPS, GPS OneXTRA™</li> <li>Wideband GPS processing (20MHz) for improved measurement accuracy</li> <li>Passive/active GPS antenna support</li> </ul>	<ul style="list-style-type: none"> <li>Standalone GPS, Assisted GPS, GPS OneXTRA™</li> <li>Wideband GPS processing (20MHz) for improved measurement accuracy</li> <li>Passive/active GPS antenna support</li> </ul>	Not included
<b>SIM</b>	USIM/SIM connection – Class B and Class C	✓	✓	✓	Not applicable
<b>CPU</b>		ARM926EJ-S @ 450 MHz Memory available for customer apps 512MB Flash (available : 20MB for data, 30MB for application, 372MB extra data partition) 128MB RAM (available : 85 MB)	ARM926EJ-S @ 450 MHz Memory available for customer apps 512MB Flash (available : 20MB for data, 30MB for application, 372MB extra data partition) 128MB RAM (available : 85 MB)	ARM926EJ-S @ 450 MHz Memory available for customer apps 512MB Flash (available : 20MB for data, 30MB for application, 372MB extra data partition) 128MB RAM (available : 85 MB)	ARM926EJ-S @ 450 MHz Memory available for customer apps 512MB Flash (available : 20MB for data, 30MB for application, 384MB extra data partition) 128MB RAM (available : 85 MB)
<b>Ethernet (IEEE 802.3)</b>	10/100Mb/s RJ45 Connector	✓	✓	✓	✓
<b>microSD card holder</b>		✓	Not included	Not included	Optional
<b>Power control</b>	Timed Wakeup	✓	<ul style="list-style-type: none"> <li>Timed wake-up possible with RTC and Cortex M0 in sleep mode</li> <li>Remote modem wake-up</li> </ul>	<ul style="list-style-type: none"> <li>Timed wake-up possible with RTC and Cortex M0 in sleep mode</li> <li>Remote modem wake-up</li> </ul>	<ul style="list-style-type: none"> <li>Timed wake-up possible with RTC and Cortex M0 in sleep mode</li> </ul>
	Ignition Sensing	✓	✓	✓	✓
<b>Power</b>	DC Power in, 9-33 V DC	✓	✓	✓	✓
	Connector type Micro-Fit, Dual row, 4 circuits	✓	✓	✓	✓
<b>Case</b>	Dimension (115x105x45mm)	✓	✓	✓	✓
	Weight	304g	294g	294g	282g
	Mounting, Bulkhead, 4x M4 holes, DINrail with adapter	✓	✓	✓	✓
<b>Environmentals</b>	Operating temperature	-30°C to +70°C	-30°C to +70°C	-30°C to +70°C	-30°C to +70°C
	Storage temperature	-40°C to +70°C	-40°C to +70°C	-40°C to +70°C	-40°C to +70°C
	Humidity operational.: 5% - 95%	5% - 95%	5% - 95%	5% - 95%	5% - 95%
<b>Certifications</b>		CE, FCC, IC, PTCRB, E-mark, EN50155, AT&T, T-Mobile, Verizon, Latam, Australia, Singapore	FCC, IC, PTCRB, IFETEL, AT&T, T-Mobile, Sprint, Verizon, Bell Mobility, Telus, Aeris, Telcel, Entel, US Cellular, Latam	CE, TRA, E-mark, RCM	CE, FCC, IC
<b>Std. compliance</b>	ROHS, Reach	✓	✓	✓	✓
<b>CloudGate Universe</b>	Device can be configured OTA using CloudGate Universe	✓	✓	✓	✓
<b>Expansion cards</b>	2 x expansion slots for adding cards	✓	✓	✓	✓
<b>For developers</b>	Support CloudGate development kit: Developer board, Breadboard, SDK, HDK	✓	✓	✓	✓
<b>In the box</b>	Accessories are available (i.e. Power cable, antenna's etc.)	CloudGate Gateway	CloudGate Gateway	CloudGate Gateway	CloudGate Gateway
<b>Product Code</b>		CG0114-12019	CG0198-12042	CG118-12043	C102-11972

# CloudGate ACCESSORIES

- 1008855 3g/LTE antenna (Grandtek)
- 1008379 WiFi antenna (Taoglass)
- 1009568 External antenna LTE/GPS A/WiFi AP 1533-b 0,4m
- 1009607 External antenna LTE/GPS A/WiFi AP 1533-b 1,5m
- 1009608 External antenna LTE/GPS A/WiFi AP 1533-b 3m

- 1008098 868/900 MHz antenna (Pulse)
- 1008607 DC power cable with microfit connector 3m (3-wire)
- 1009120 AC power supply 12V/1.5A class 6 and cable with microfit connector 1.5m (interchangeable blades)
- 1008890 US interchangeable plug for power supply
- 1008889 EU interchangeable plug for power supply

- 1008891 UK interchangeable plug for power supply
- 1009077 AU interchangeable plug for power supply
- CG7101-12018 Telematics IO break-out board and cable
- 108837 Telematics card IO connector (9x2)
- 1008836 Precrimped cables for Telematics card IO connector (300mm, 20 AWG)

# CloudGate

EXPANSION CARDS

## STANDARD CARDS

## NON-STANDARD

Front slot

Back slot

Front slot



**STANDARD SERIAL CARD**  
CG1101-11919

- One RS-232 serial port 921,6 Kbaud maximum speed



**INDUSTRIAL SERIAL CARD**  
CG1102-11920

- One RS-232 serial port 921,6 Kbaud maximum speed
- One 2KV isolated RS-485 serial port 921,6 Kbaud maximum speed, full duplex or half duplex, 2 wire or 4 wire. Switchable termination.



**ETHERNET EXPANSION CARD**  
CG1104-11936

- 4-port 10/100 Base-T, µSD card holder




**DEVELOPER CARD for SW developer**  
CG1105-11937

- Extended format card for with headers for all interfaces.
- Includes headers for access to USB, USB on the go, RS-232, I2C, SPI/SD and GPIO lines.
- On board temperature sensor, relay, SD card slot and RS232 serial port.



**TELEMATICS CARD - extended IO & CAN**  
CG5106-11984

- Adds flexible IO and RS232/RS485/USB/CAN connectivity for industrial and telematics applications to CloudGate
- Built-in 3 axis accelerometer for movement detection and other applications
- Additional SIM card slot for back-up roaming SIM
- Built-in microcontroller offloads all IO from CloudGate
- Breakout card (CG7101-12018) available for developers



**BLE Bluetooth Low Energy CARD**  
CG1119-12096

- Bluetooth 4.2 LE
- Nordic Semiconductor nRF52 chipset
- Multiprotocol radio allows other protocol stacks as well
- OTA-DFU (Over-The-Air Device Firmware Update) capable
- Connect (i)Beacons to your CloudGate for RTLS applications



**BREADBOARD CARD for HW developer**  
CG1108-11980

- Ideal for prototyping your own expansion card.
- Supports 3 types of connections:
  - All signals on the back connector can be tapped off on breadboard area near this connector
  - 2.54 mm pitch components can be soldered on main breadboard area
  - 3.5 mm pitch connectors can be soldered on two front rows to provide a more reliable and longterm connection



**LoRaWAN CARD**  
CG2118-12078 (868 MHz)  
CG2119-12091 (915 MHz)  
CG2121-12098 (433 MHz)

- Available for 433 MHz, 868 MHz and 915 MHz LoRa devices
- Connects LoRa sensors/actuators to private & public LoRa networks
- Optionally combined with WLAN connectivity



**WLAN CARD Client & Access point**  
CG2101-11921

- 802.11 a/b/g/n
- Access point up to 10 simultaneous users



**MONNIT® CARD**  
CG2111-12049 (868 MHz)  
CG2112-12050 (900 MHz)  
CG2113-12054 (433 MHz)


- Available for 433 MHz, 868 MHz and 900 MHz Monnit devices
- Connects up to 100 Monnit sensors

- CG1109-11991** • Ethernet card - 1 port
- CG1103-11935** • Ethernet card - 4 port with PoE
- CG1106-11957** • Telematics card
- CG5106-11983** • Telematics card with extended IO
- CG5106-12052** • Telematics card with extended IO (4-port current loop)
- CG5106-12039** • Telematics card with extended IO and CAN (4-port current loop)
- CG1110-12012** • KNX card
- CG5221-12023** • KNX bus with RS485 expander and P1
- CG1121-12080** • Xbee card
- CG1118-12064** • Smartcity card
- CG1120-12079** • M-bus slave - wM-bus card

Back slot

- CG2102-11994** • WXLAN access point card
- CG2103-12047** • Monnit® card with WLAN (868 MHz)
- CG2104-12048** • Monnit® card with WLAN (900 MHz)
- CG2105-12053** • Monnit® card with WLAN (433 MHz)
- CG2117-12065** • Xbee card
- CG2120-12090** • Smart Metering card

## PARTNER CARDS



Front slot

Back slot

- AiriCOM - Industrial grade IO card
- ATIM - LoRa card
- BiPOM - nano-WiPom card
- BiPOM - 2-RS232 & USB card
- BiPOM - 4-port USB card

- BiPOM - SiFlex card
- BiPOM - Multiwireless card
- BiPOM - Monnit card
- BoilerConnect - GPIO card
- Foxon - IQRF card

- Giga Concept - RFID card
- Paksense - Temperature sensing card
- USRobotics - Modemulator card

- 5A - MicroSD holder card

## CloudGate

APPLICATIONS

## LuvitRED

Award-winning visually configurable CloudGate application for design and deployment of smart IoT solutions delivering true IoT edge computing.

Key features:

- 'Drag & drop and visual wiring' configuration environment for Cloudgate devices
- 'Drag and drop' and visual wiring configuration with minimal programming
- Rapid application development in only minutes
- Supports a wide variety of sensors aka 'node sets'
- Reduces risk/lowers development cost
- Shorter sales cycles
- Drives innovation by enabling 'risktaking'

## SRAS

SECURE REMOTE ACCESS SERVICE

Provides Secure Remote Access from your laptop/smartphone to your CloudGate gateways and the devices attached to it. VPN tunnel is set-up from the CloudGate gateway to the SRAS server and from your computer to the SRAS server, creating a secure end-to-end connection

Benefits:

- CloudGate gateway can create VPN tunnels upon request without the need for a permanent VPN tunnel thus reducing the data traffic associated with secure remote access
- VPN tunnel leverages built-in VPN clients of major OS suppliers and device manufacturers making life cycle management easier, robust & cost effective
- Self provisioning and support for bulk device provisioning via webbased UI
- Fully qualified domain names used to obtain access to the device
- Multi-tier support - device access based on permissions

## CloudGate

UNIVERSE

With CloudGate Universe Option supports its partners by providing the easiest and most cost effective deployment mechanism for their software solutions. A provisioning system dedicated to delivering Option and third party software and product configuration to CloudGate gateways. CloudGate Universe is part of the CloudGate


solution with no registration cost or yearly fees and no competition with system integrator or software developer services and products. Configure just one, some or all your devices for a particular site, application or customer and configure all your devices to the same device setting.

[www.cloudgateuniverse.com](http://www.cloudgateuniverse.com)

Option Wireless Technology's CloudGate is the carrier-approved IoT solution platform that delivers device connectivity, security and processing power for global IoT applications.

It includes the world wide carrier-approved intelligent Cloudgate gateway that comes with CloudGate Universe, Option's cloud-based configuration and deployment platform, as well as the CloudGate SDK for rapid application development, the CloudGate HDK for prototyping custom

expansion cards and award-winning LuvitRed, a visually configurable device agent with easy-to-use graphical, "drag and drop & visual wiring " configuration. LuvitRed overcomes complexities of the vast variety of protocols used in different IoT verticals and delivers true IoT Edge Computing capabilities on Cloudgate in an easy way. A pre-built library of software applications and modular hardware extensions ensure ease of deployment and maximum flexibility. Only Option delivers a complete M2M ecosystem.

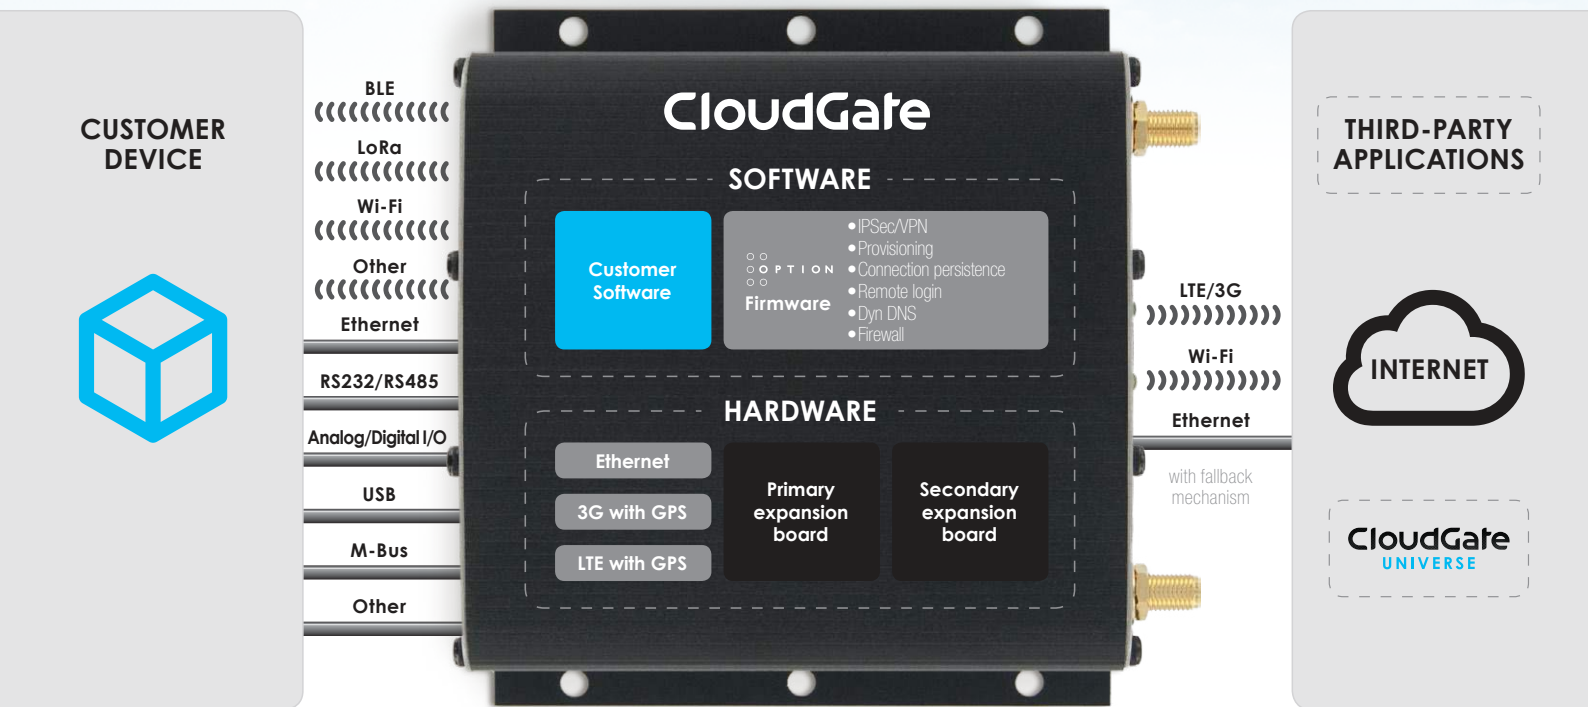

As part of the continual product improvement process, OPTION reserves the right to alter the specifications of this product.  
 © 2017 OPTION. Option and the Option logo are registered trademarks of OPTION. All third-party trademarks are the property of the respective owners.  
 Option nv - Gaston Geenslaan 14 - 3001 Leuven Belgium - T +32 16 317 411 - F +32 16 207 164 - www.option.com

