

Ratings

Voltage: 600 V
 Temperature: -40~105 °C
 Flammability: VW-1

Conductor

Conductor count: 1
 Gauge: 30 AWG 0.05 mm²
 Material: tinned copper strands
 Strand size: Ø 0.1 mm x 7
 Resistance at 20 °C: 381 Ω /km max


Insulator

Material: Polyphenylene Ether, Modified (mPPE)
 Color: green
 Diameter: Ø 0.8 ±0.08 mm
 Nominal thickness: 0.23 mm
 Resistance at 20 °C: 100 MΩ /km min

Wire marking: E339579 UL AWM STYLE 11028 30 AWG 105°C
 600V VW-1 --- cUL AWM I A/B 105°C 600V FT1 TENSILITY

Bend radius

Minimum: 4 times diameter (3.2 mm)

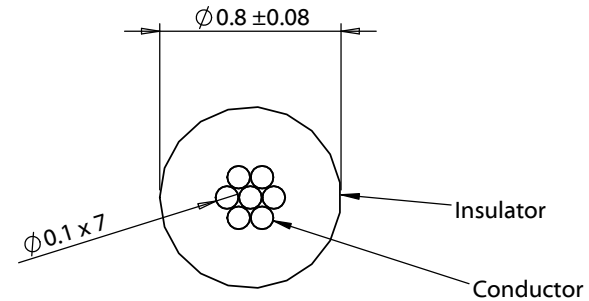

| | | | | | |
|-----------|----------|-----------------|--|--|---|
| Revision: | Date: | Description: | Prepared: | Notes: | TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com |
| A | 3/2/2021 | Initial release | AG <small>Digitally signed by AG Date: 2021.03.02 17:10:37 -08'00'</small> | | |
| | | | Verified: | Phthalate and halogen free | |
| | | | AW <small>Digitally signed by AW Date: 2021.03.05 13:24:26 -08'00'</small> | Description: | Size: Part number: |
| | | | Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm | Wire, hook-up, TS, 30 AWG, UL 11028, 600V, 105C, 0.8 mm, mPPE, green | A 30-01797 |
| | | | | | Scale: 30:1 Sheet 1 of 1 |

5

4

3

2

1