



## CERAMIC BALUN

# RF Transformer

# NCS2-771-75+

Mini-Circuits

75Ω 240 to 770 MHz 1:2 Ratio

### FEATURES

- Wideband, 240 to 770 MHz
- Low phase unbalance, 7 deg. and amplitude unbalance, 0.3 dB typ
- Miniature size 0805, 0.079"x0.049"x0.033"
- LTCC construction
- Low cost
- Aqueous washable

### APPLICATIONS

- VHF/UHF
- Signal process
- Instrumentation



Generic photo used for illustration purposes only

CASE STYLE: GE0805C-9

#### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Impedance Ratio (Secondary/Primary)			2		
Frequency Range		240		770	MHz
Insertion Loss <sup>1</sup>	240 - 770	—	0.8	1.2	dB
Amplitude Unbalance	240 - 770	—	0.3	1.0	dB
Phase Unbalance <sup>2</sup>	240 - 770	—	7	10	Degree

1. Reference Demo Board TB-626+


2. Relative to 180°

### MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power <sup>3</sup>	2W

3. Passband rating, derate linearly to 1W at 100°C ambient. Permanent damage may occur if any of these limits are exceeded.

### CONFIGURATION J

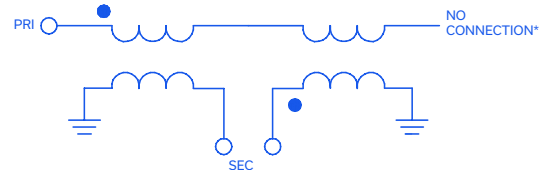

\*Internal open circuit

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. C  
ECO-010420  
NCS2-771-75+  
MCL NY  
211112

PAGE 1 OF 3




### PAD CONNECTIONS

PRIMARY DOT (Unbalanced Port)	2
PRIMARY (GND)	1,3
SECONDARY DOT (Balanced)	4
SECONDARY (Balanced)	6
NO CONNECTION	5

PRODUCT MARKING: N/A

### DEMO BOARD MCL P/N: TB-626+ SUGGESTED PCB LAYOUT (PL-348)

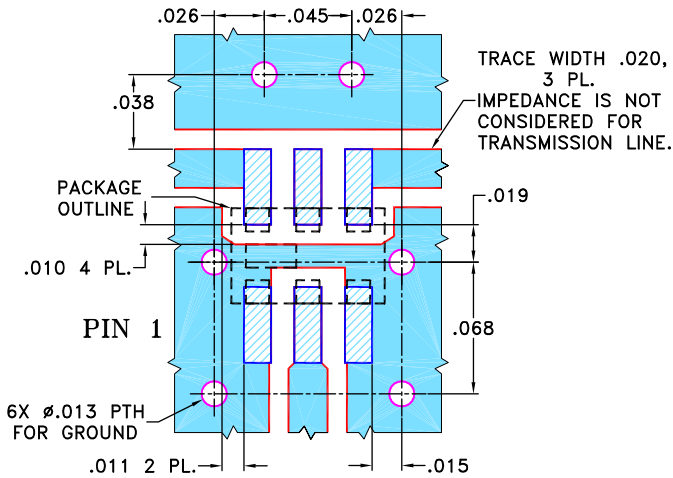


**NOTES:**


1. TRACE WIDTH IS SHOWN FOR REFERENCE ONLY.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### OUTLINE DRAWING

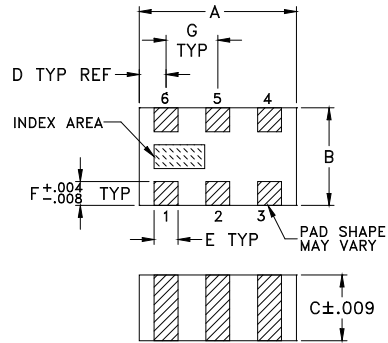

### PCB Land Pattern



Suggested Layout,  
Tolerance to be within  $\pm .002$

### OUTLINE DIMENSIONS (Inches/mm)

A	B	C	D	E	F
.079	.049	.033	.014	.012	.012
2.0	1.24	0.84	0.36	0.30	0.30
G	H	J	K		wt
.026	.014	.039	.110		grams
0.66	0.36	1.00	2.80		.008




### TAPE & REEL INFORMATION: F74



### TYPICAL PERFORMANCE DATA<sup>3</sup>

Frequency (MHz)	Insertion Loss (dB)	Input Return Loss (dB)	Amplitude Unbalance (dB)	Phase Unbalance (deg)
240	0.66	18.76	0.21	4.45
300	0.58	20.33	0.17	5.57
370	0.63	16.43	0.14	6.29
420	0.67	15.22	0.12	6.26
500	0.72	14.73	0.10	5.34
570	0.74	15.18	0.10	3.40
620	0.75	16.01	0.08	1.41
670	0.76	17.24	0.06	1.10
710	0.77	18.58	0.04	3.65
770	0.79	21.67	0.04	7.99

3. Measured with Agilent E5071B network analyzer using impedance conversion and port extension.

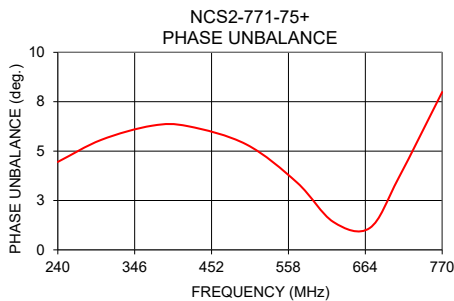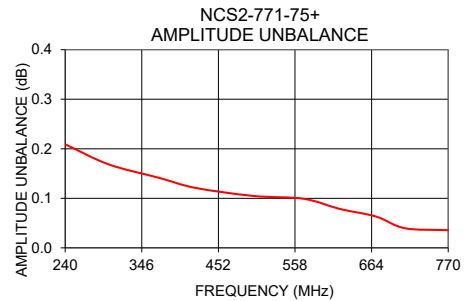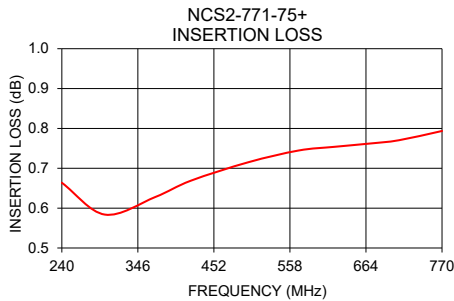

#### NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)