
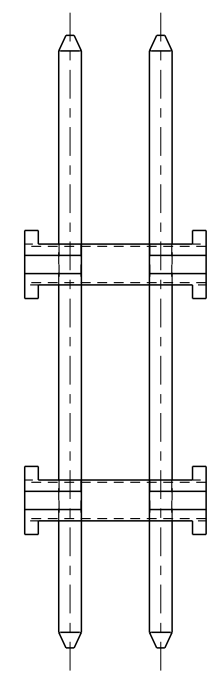
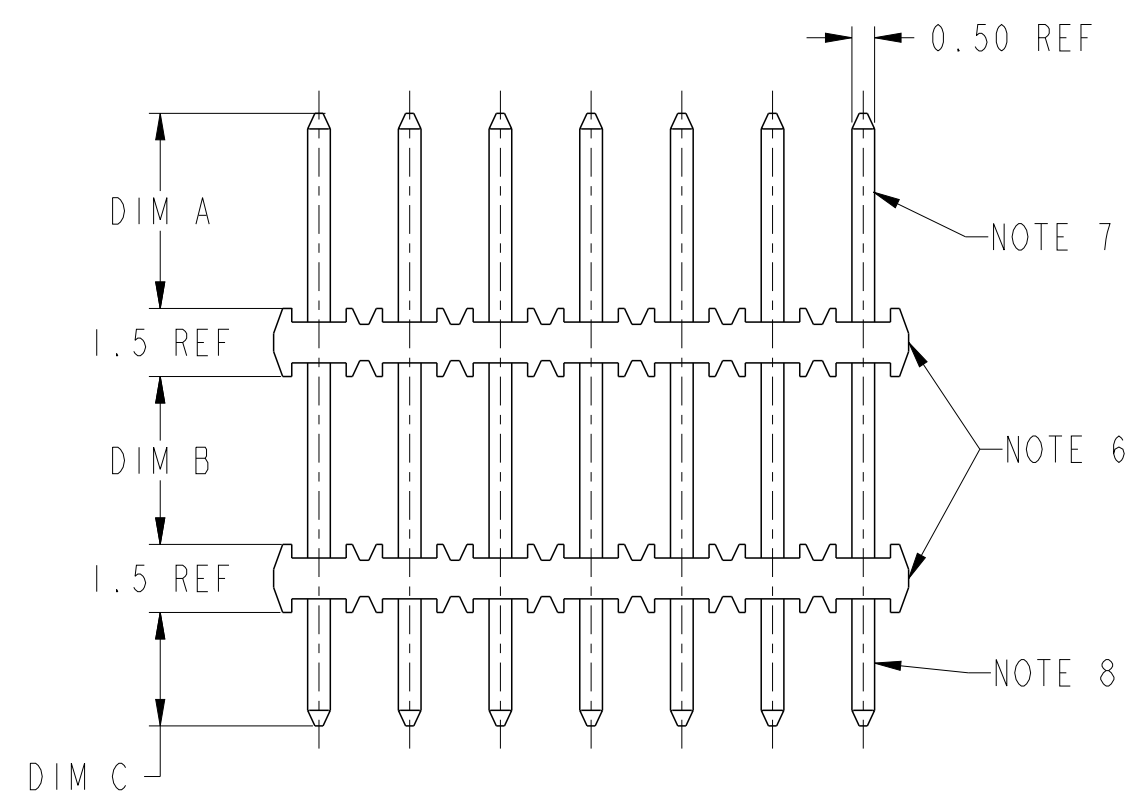
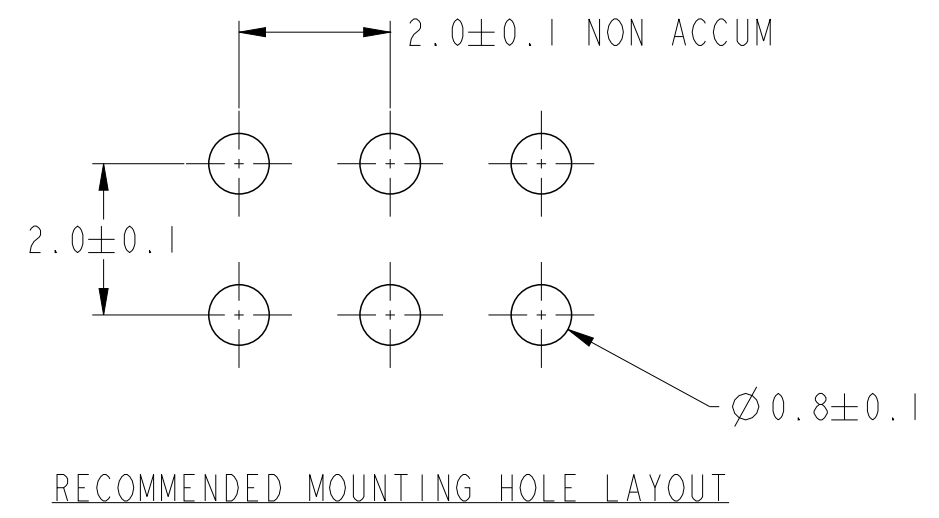


1

2

3

4

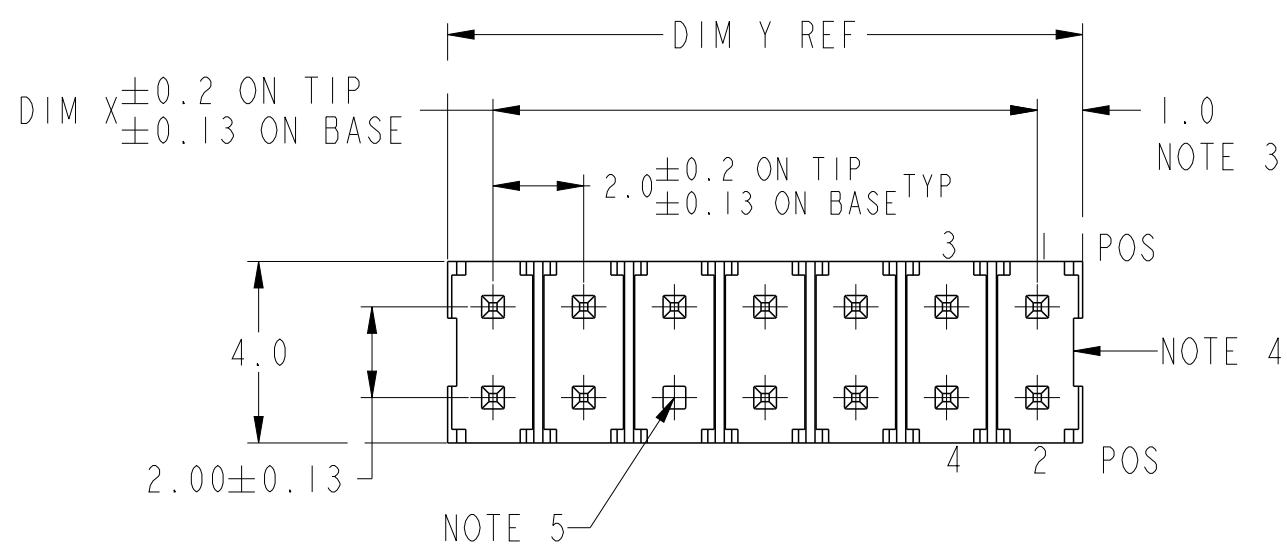

Amphenol
FCi

© 2016 AFCI

spec ref	-	dr	Andrew Yong	2010/11/10	projection	MM	size	A3	scale	5:1	
tolerance std	ISO 406 ISO 1101	eng	Yuan-Yuan Bao	2020/10/26			ecn no	ELX-N-38731-1			
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	-	-			rel level	Released			
surface	linear	appr	Tim Yao	2020/12/24	product family	MINITEK		cat. no.	-	Product - Customer Drw	
ISO 1302	angular				MINITEK II		dwg no	10066848		rev	L
						R/R STR HDR (HIGH STANDOFF)				sheet 1 of 2	

PRODUCT NO.	POS	DIM X	DIM Y	DIM A	DIM B	DIM C	POL POS
10066848-X01LF	2X11	20	22	4.3	3.7	2.5±0.25	-
-X02LF	2X17	32	34	4.3	3.7	2.5±0.25	-
-X03LF	2X10	18	20	4.3	3.7	2.5±0.25	-
-X04LF	2X5	8	10	6.4	7.6	2.2±0.25	-
-X05LF	2X7	12	14	4.3	3.7	2.5±0.25	-
-X06LF	2X5	8	10	4.3	3.7	2.5±0.25	-
-X07LF	2X12	22	24	4.3	3.7	2.5±0.25	-
-X08LF	2x4	6	8	3.4	11.2	2.5±0.25	-

NOTES:

- MATERIAL:
BODY : HIGH TEMPERATURE THERMOPLASTIC, UL 94V-0 BLACK
PIN : COPPER ALLOY
- TOLERANCE UNLESS OTHERWISE NOTED ±0.25
- DIM 1.0±0.15 FOR MOLDED SIDE(S) ONLY. IF SIDE(S) ARE BROKEN, DIM 1.5 MAX APPLIES
- RECESS APPLIES TO MOLDED SIDE(S) ONLY.
- POLARISATION BY OMISSION OF PIN.POSITION REFER TO TABLE
- MOLDED SIDES OF HSG TO BE ON THE SAME END FOR STACKABILITY - APPLICABLE FOR SPECIFIC P/N.
- PLATING ON MATING LENGTH:
-1XX --- 0.76um GXT OVER 1.27um MIN NICKEL UNDERPLATE.
-2XX --- 1.27um GXT OVER 1.27um MIN NICKEL UNDERPLATE.
-3XX --- 0.38um GXT OVER 1.27um MIN NICKEL UNDERPLATE.

- SOLDER TAIL PLATING:
a) 3.81um MIN TIN/LEAD (90/10) PLATING OVER 1.27um MIN NICKEL UNDERPLATE.
b) 2.54um MIN 100% MATTE TIN PLATING OVER 1.27um MIN NICKEL UNDERPLATE.
- PRODUCT DESCRIPTION CODE:
XXXXXXXX - XXX X LF
 - LEAD FREE SEE NOTES 8b, 11
 - PACKAGE TYPE SEE NOTE 12
 - EXTENSION NUMBER
 - BASE NUMBER
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.57MM MINIMUM THICK CIRCUIT BOARD.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- PACKAGING:
BLANK: TAPE AND REEL (PICK-UP CAP IS STANDARD L*W=8.0*7.0MM)
A: TAPE AND REEL (WITH SMALL PICK-UP CAP L*W=5.0*4.0MM)

Amphenol FCI

© 2016 AFCI

dr	Andrew Yong	2010/11/10	projection	MM	size	A3	scale	5:1
eng	Yuan-Yuan Bao	2020/10/26		← →	ecn no	ELX-N-38731-1		
chr	-	-			rel level	Released		
appr	Tim Yao	2020/12/24	product family	MINITEK		rel level	Released	
Amphenol FCI		MINITEK II			dwg no	10066848		rev
		R/R STR HDR (HIGH STANDOFF)						L
		cat. no.	-		Product - Customer Drw		sheet 2 of 2	