



2500 MHz Cavity Bandpass Filter



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

Part Number: AB2500B895

Electrical specifications

- 1 dB passband frequency range:** 2475-2525 MHz
- Passband insertion loss @Fo:** <1.5 dB, 1.3 dB typ
- Passband ripple:** <0.5 dB P-T-P
- Attenuation 1:** <1.5 dB@2500 MHz
- Attenuation 2:** <1.6 dB@2497.5-2503.5 MHz
- Passband return loss:** -14 dB max, <1.5:1 Typ
- Input/Output impedance:** 50 Ohm
- RF power capability average:** 5 Watts


Mechanical

- Mounting Method:** Threaded Mounting Holes
- Connector Type:** SMA Male
- Dimensions:** 3.92" X 0.98" X 0.62" in

Environmental

- Operating Temperature:** -45 to +85° C
- Storage Temperature:** -55 to +95° C
- Shock:** 20 G. 11ms
- Vibration:** 20 G. 5 to 200 Hz

Outline Drawing:

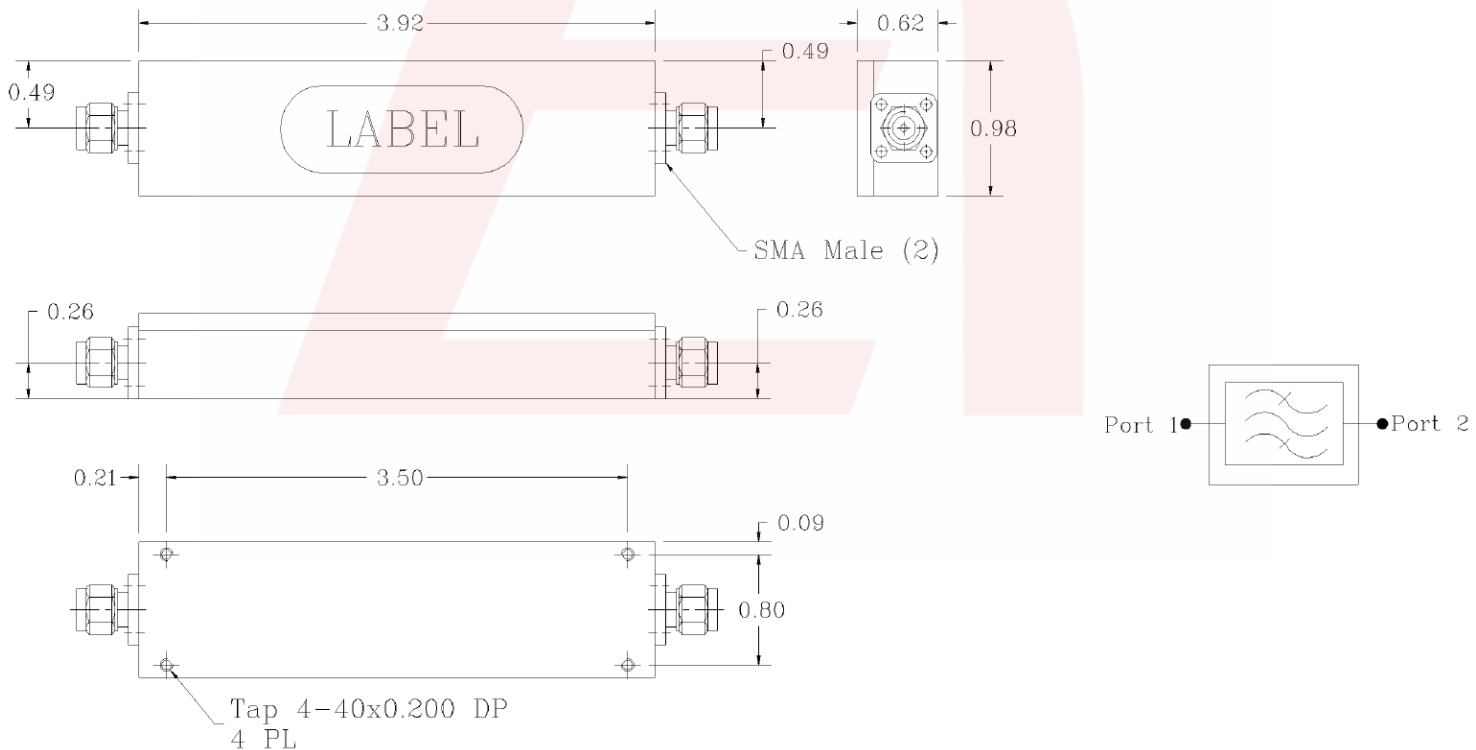

DS-B895-03152018-Rev0