

**Ratings**

Voltage: 300 V  
 Temperature: -25 to 80 °C  
 Flammability: VW-1

**Conductor**

Conductor count: 8  
 Gauge: 26 AWG 0.14 mm<sup>2</sup>  
 Material: tinned copper strands  
 Strand size:  $\varnothing 0.16$  mm x 7  
 Resistance at 20 °C: 150  $\Omega$  /km max

**Insulator**

Material: PVC  
 Color: red, black, white, yellow, blue, green, orange, purple  
 Diameter:  $\varnothing 1.1 \pm 0.10$  mm  
 Nominal thickness: 0.29 mm  
 Resistance at 20 °C: 10 M $\Omega$  /km min

**Filler**

Material: cotton rope



**Outer jacket**

Material: PVC  
 Color: gray  
 Diameter:  $\varnothing 5.5 \pm 0.30$  mm  
 Nominal thickness: 0.93 mm

**Wire marking:** E339579 UL AWM STYLE 2464 26 AWG 80°C  
 300V VW-1 --- cUL AWM I/II A 80°C 300V FT1 TENSILITY

**Tests**

Insulation tensile strength: 2.11 kgf/mm<sup>2</sup>  
 Jacket tensile strength: 1.05 kgf/mm<sup>2</sup>  
 After aging at 113  $\pm 2$  °C for 7 days:  
 Minimum tensile strength 70 % original  
 Minimum elongation 65 % original  
 Heat shock: 121  $\pm 1$  °C /1 hour, no observed degradation  
 Deformation: 121  $\pm 1$  °C /1 hour,  $\leq 50$  %  
 Cold bend: -10  $\pm 2$  °C /1 hour, no observed cracking

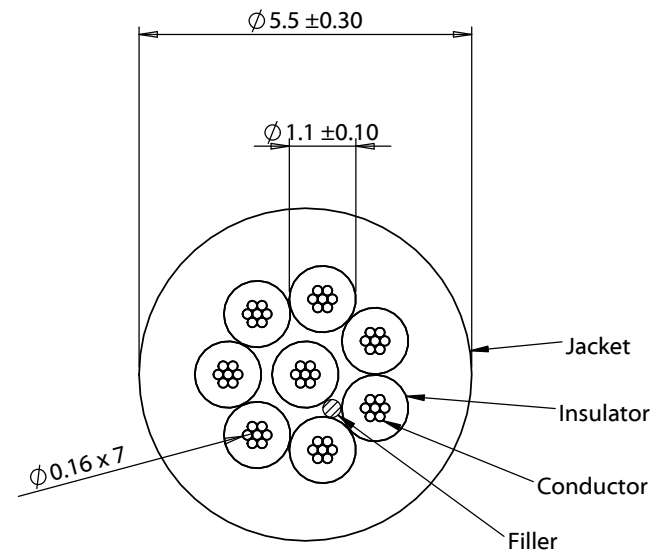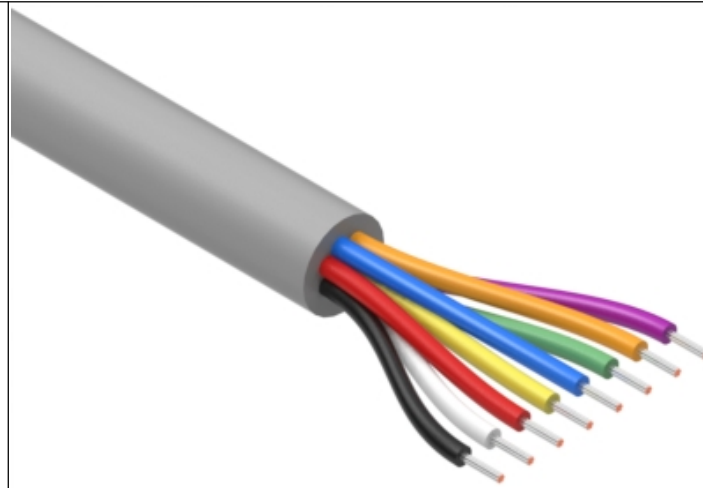

Revision:	Date:	Description:	Prepared: AW <small>Digitally signed by AW Date: 2019.05.16 14:43:20 -07'00'</small>	Notes:	<b>TENSILITY</b> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	5/16/2019	Initial release	Verified: JP <small>Digitally signed by JP Date: 2019.05.17 13:42:14 -07'00'</small>	RoHS compliant	
			Dimensions are in millimeters. Tolerances: X: $\pm 0.5$ mm X.X: $\pm 0.3$ mm X.XX: $\pm 0.05$ mm	Function test: no open, no short circuit, no intermittent	Size: Part number: A 30-01321
				Description: Wire, 8C TS, 26 AWG, UL2464, 300V, 80C, 5.5 mm, VW-1, PVC, 60P, gray	Scale: 8:1

4

↑

4

3

2

1