

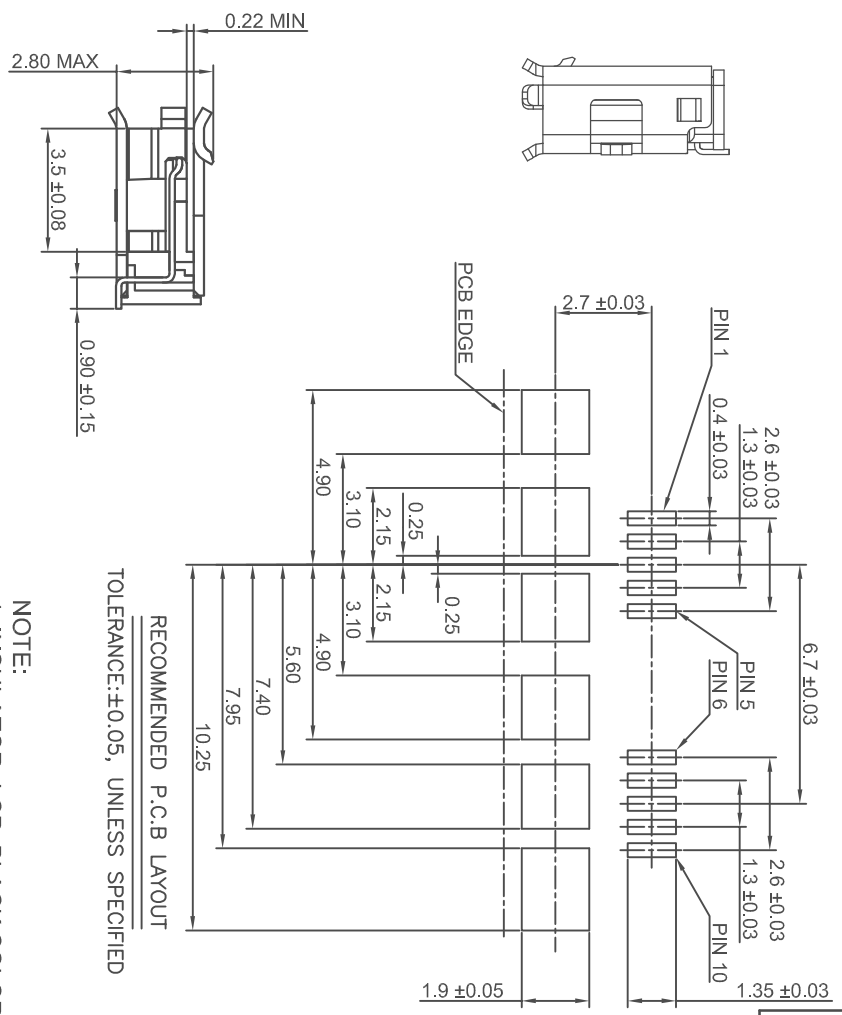

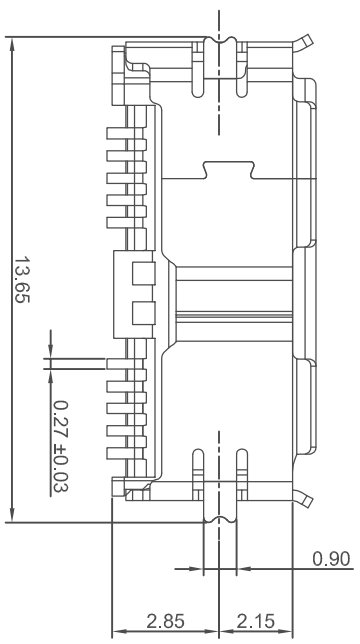


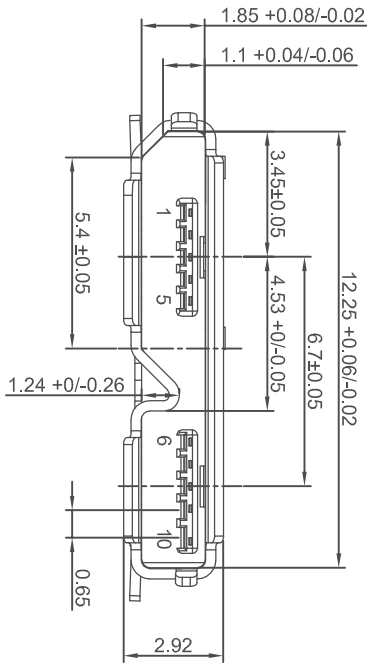

| | |
|-------------------------|---|
| ISSUE NUMBER | 1 |
| ORIGINAL | |
| ADD 30U" GOLD PLATING | |
| R.STA.MONICA JUN.18/10 | |
| TIN PLATING WAS GOLD | |
| FLASH ON SOLDER TAIL | |
| NICKEL PLATING WAS GOLD | |
| FLASH ON SHELL TAB | |
| R.STA.MONICA DEC.4/2013 | |

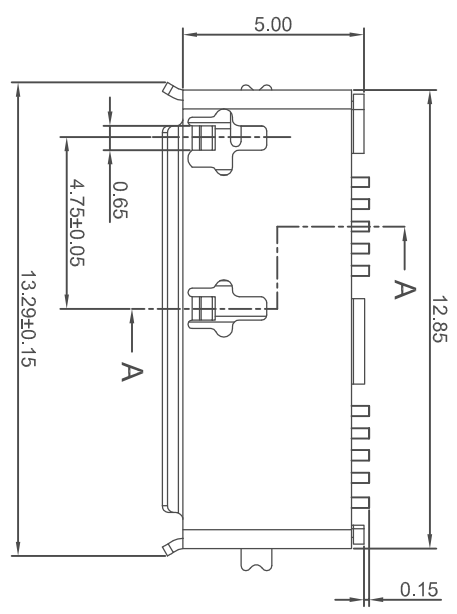

RECOMMENDED P.C.B LAYOUT
TOLERANCE: ±0.05, UNLESS SPECIFIED

- NOTE:
1. INSULATOR: LCP, BLACK COLOR
 2. USB CONTACT: BRASS 0.15MM THICK, 30U" GOLD PLATING ON CONTACT AREA, AND TIN PLATED ON SOLDER TAIL, WITH 80U" MIN. NICKEL UNDERPLATING OVERALL
 3. SHELL: STAINLESS STEEL, 0.3MM THICK, WITH 80U" MIN. NICKEL PLATING OVERALL
 4. ALL CONNECTOR DIMENSION TOLERANCE: ±0.2, UNLESS OTHERWISE SPECIFIED

ELECTRICAL SPECIFICATIONS:
CURRENT RATING: 0.25 AMP MIN.
CONTACT RESISTANCE: 30 MILLIOHMS MAX.
INSULATION RESISTANCE: 100 MEGOHMS MIN.
DWV: 100 VAC
TEMPERATURE RANGE: -20°C TO +85°C



MICRO USB 3.0-B SMT TYPE

| | | | |
|---|--|--------------------------------------|--|
| EDAC INC TORONTO, ONTARIO CANADA | | ACAD REFERENCE NO. 690-010-295-484 | |
| YOUR CONNECTION TO QUALITY & SERVICE | | DRAWN: R.STA.MONICA DATE: JUN.8/2010 | |
| THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC. AND SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | | CHECKED: DATE: | |
| ROHS COMPLIANT | | SCALE: NOT TO SCALE SHEET 1 OF 2 | |
| EDAC INC TORONTO, ONTARIO CANADA | | DRAWING NUMBER | |
| THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2002/95/EC AND 2002/96/EC FOR ROHS COMPLIANCY | | 690-010-295-484 | |
| | | ISSUE | |
| | | 3 | |



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2002/95/EC AND 2002/96/EC FOR ROHS COMPLIANCY

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.

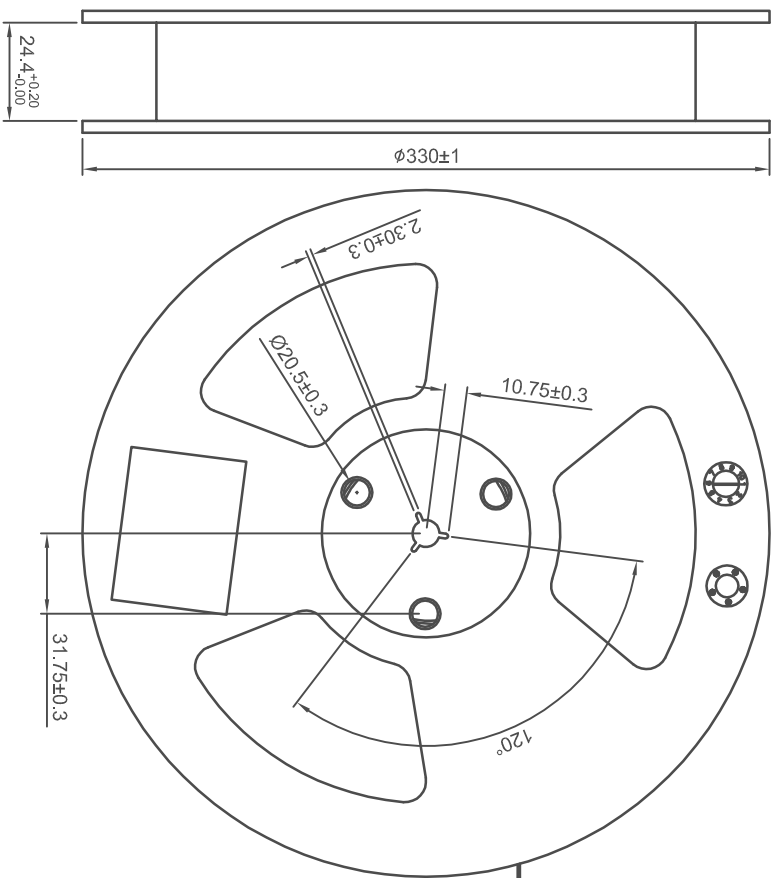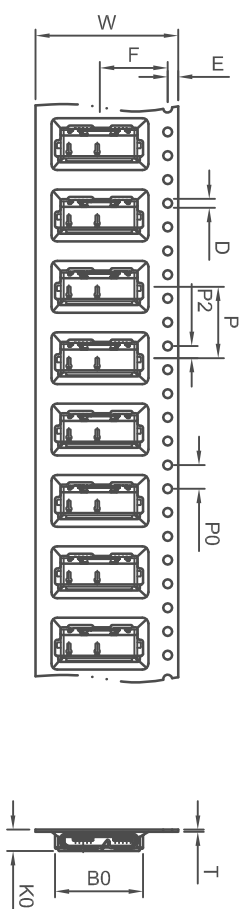


| | | | | | |
|------|----------|----------|----------|----------|---------|
| ITEM | W | F | P | P2 | P0 |
| DIM | 24.0±0.3 | 11.4±0.1 | 12.0±0.1 | 2.03±0.1 | 4.0±0.1 |

| | | | | | | |
|------|---------|----------|-----------|---------|---------|-----------|
| ITEM | D | E | BO | KO | AO | T |
| DIM | 1.5±0.1 | 1.75±0.1 | 14.80±0.1 | 3.6±0.1 | 6.2±0.1 | 0.35±0.05 |

- NOTE:
1. TAPE MATERIAL: PS
 2. TAPE LENGTH: 18.6 METERS
 3. TOTAL 1500PCS PRODUCT SPACES (13" REEL)

**MICRO USB 3.0-B SMT TYPE
TAPE AND REEL PACKAGING**

| | | | |
|--|--|--|--|
|  EDAC INC TORONTO, ONTARIO CANADA | | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | |
| ACAD REFERENCE NO. 690-010-295-484 | | DRAWN: R.STA.MONICA DATE: JUN.10/2010 | |
| CHECKED: | | DATE: | |
| SCALE: NOT TO SCALE | | SHEET 2 OF 2 | |
| DRAWING NUMBER 690-010-295-484 | | ISSUE 3 | |

YOUR CONNECTION TO QUALITY & SERVICE