



CUSTOMER PRINT

PART NUMBER: 6282-XSG-3XX(CCX)


- NOTES:**  
 1. ALL PARTS TO BE BULK PACKED.  
 2. CONTACTS TO BE INSERTED IN CONNECTOR




**FACE VIEW**  
P/N: 6282-2SG-3XX




**FACE VIEW**  
P/N: 6282-3SG-3XX

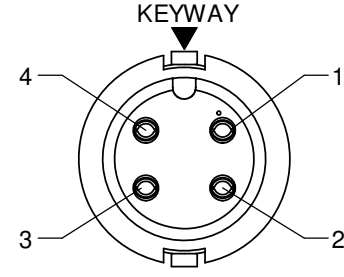


**FACE VIEW**  
P/N: 6282-4SG-3XX




**FACE VIEW**  
P/N: 6282-5SG-3XX



**FACE VIEW**  
P/N: 6282-6SG-3XX



**FACE VIEW**  
P/N: 6282-7SG-3XX



**FACE VIEW**  
P/N: 6282-8SG-3XX

O-RING  
MAT'L: NEOPRENE, BLACK

.040 REF.  
[1.0mm]

.889 ±.010  
[22.6mm]

.088 ±.015  
[2.2mm]

.430 ±.010  
[10.9mm]

CABLE CONNECTOR  
MAT'L: THERMOPLASTIC, BLACK

(2-8) # 20 SOCKET CONTACTS  
MAT'L: GOLD PLATED  
COPPER ALLOY

1.315 REF.  
[33.4mm]

Ø.710 REF.  
[18.0mm]

**SHOWN ASSEMBLED KIT**  
FOR CUSTOMER REFERENCE ONLY

DIMENSIONS IN BRACKETS [ ] ARE METRIC


GROMMET, DAISY CHAIN  
MAT'L: RUBBER, BLACK  
FOR 6282-XSG-3DC

COUPLING RING  
MAT'L: THERMOPLASTIC, BLACK

SINGLE GROMMET  
MAT'L: RUBBER, BLACK  
6282-XSG-311 .125 I.D FOR CABLES .09-.14 [2.3-3.5mm] O.D.  
6282-XSG-315 .159 I.D FOR CABLES .15-.17 [3.8-4.3mm] O.D.  
6282-XSG-318 .187 I.D FOR CABLES .18-.20 [4.6-5.1mm] O.D.  
6282-XSG-321 .225 I.D FOR CABLES .21-.23 [5.3-5.8mm] O.D.

NUMBER OF CONTACTS — GROMMET SIZE FOR SINGLE GROMMET OR "DC" FOR DAISY CHAIN

ASS'Y P/N	COUP. RING COLOR
6282-XSG-3XXCC1	WHITE
6282-XSG-3XXCC2	RED
6282-XSG-3XXCC3	BLUE
6282-XSG-3XXCC4	LIGHT GREY
6282-XSG-3XXCC5	YELLOW
6282-XSG-3XXCC6	MAROON
6282-XSG-3XXCC7	GREEN

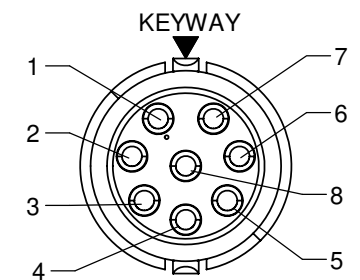

**WIRE VIEW**  
SHOWN 6282-8SG-3XX

KIT P/N	GROMMET SIZE
6282-XSG-3DC	DAISY CHAIN
6282-XSG-311	CABLE O.D. .09-.14 [2.3-3.5mm]
6282-XSG-315	CABLE O.D. .15-.17 [3.8-4.3mm]
6282-XSG-318	CABLE O.D. .18-.20 [4.6-5.1mm]
6282-XSG-321	CABLE O.D. .21-.23 [5.3-5.8mm]

ASSY P/N	NO. OF CONTACTS
6282-2SG-3XX	2 # 20
6282-3SG-3XX	3 # 20
6282-4SG-3XX	4 # 20
6282-5SG-3XX	5 # 20
6282-6SG-3XX	6 # 20
6282-7SG-3XX	7 # 20
6282-8SG-3XX	8 # 20
6282-XSG-3XX	

**CUSTOMER APPROVAL**

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT / INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: \_\_\_\_\_

DATE: \_\_\_\_\_

REV.	INIT.	DATE	DESCRIPTION
B	SS	11-07-18	ADDED CHART FOR COUPLING RING COLOR PER DOR 18-E149SL #25
A	AN	12-08-16	CONVERTED TO FAMILY DRAWING, ADDED 6282-6SG-3XX, SUPERSEDED 2-5 POS. & 7-8 POS. DRAWINGS. PER DOR 16-E149SL #20

ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF CONXALL CORPORATION. UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.		ORIG. DRAWN BY: AN	DATE: 12-07-16
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.		CHECKED BY:	
SCALE: NTS		APPROVED BY:	TITLE: CABLE CONNECTOR KIT (2-8) #20 SOCKET CONTACTS MINI-CON-X STANDARD PRODUCT
FILE: 6282-XSG-3XX(CCX)	DIRECTORY: SLW	PART NUMBER: 6282-XSG-3XX(CCX)	REV B

**RoHS COMPLIANT**