



FEMALE END VIEW



- 1. VT
- 2. RD
- 3. GY
- 4. RD/BU
- 5. GN
- 6. BU
- 7. GY/PK
- 8. WH/GN
- 9. WH/YE
- 10. WH/GY
- 11. BK
- 12. GN/YE
- 13. YE/BN
- 14. BN/GN
- 15. WH
- 16. YE
- 17. PK
- 18. GY/BN
- 19. BN

| HARTING P/N    | Type of cable | Cable length(mm)                    |
|----------------|---------------|-------------------------------------|
| 21373500D74050 | PUR           | 5000 <sup>+200</sup> <sub>-0</sub>  |
| 21373500D74100 | PUR           | 10000 <sup>+400</sup> <sub>-0</sub> |
| 21373500D74150 | PUR           | 15000 <sup>+600</sup> <sub>-0</sub> |

| SPECIFICATIONS                    |                                 |
|-----------------------------------|---------------------------------|
| CONTACT CARRIER MATERIAL/COLOR    | PBT/WHITE                       |
| MOLDED HEAD MATERIAL/COLOR        | TPU/BLACK                       |
| CONTACT MATERIAL/COLOR            | BRASS/SILVER                    |
| COUPLING NUT MATERIAL/PLATING     | ZINC ALLOY/NICKEL               |
| RATED CURRENT                     | 9A(PINS 6,12,19),2A(ALL OTHERS) |
| RATED VOLTAGE                     | 150 V                           |
| OUTER CABLR JACKET MATERIAL/COLOR | PUR/BLACK                       |
| CONDUCTOR INSULATION MATERIAL     | PVC                             |
| NUMBER OF CONDUCTORS (AWG)        | 3X18AWG+16X22AWG                |
| OPERATING TEMPERATURE             | -40°C — +80°C                   |
| PROTECTION CLASS                  | IEC IP67                        |

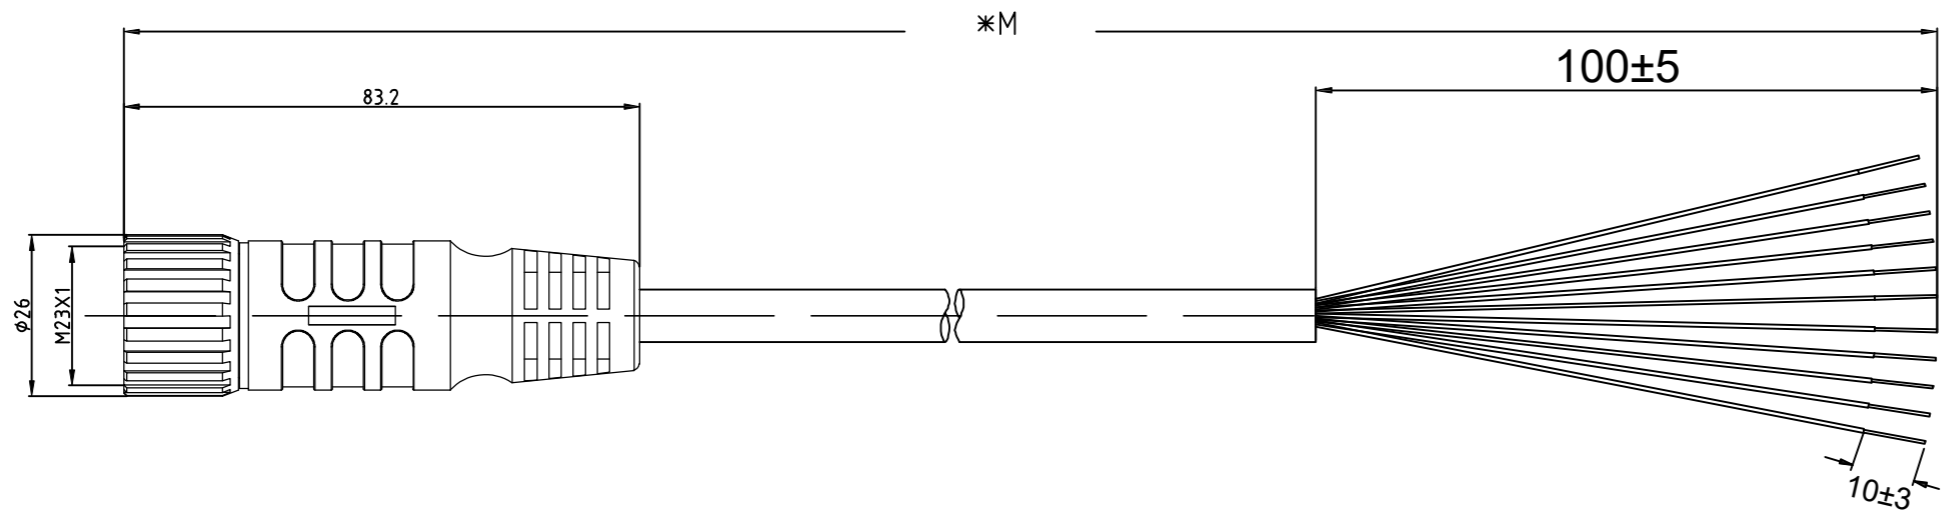

|   |  |  |  |                       |  |                          |  |                    |  |                        |  |             |
|---|--|--|--|-----------------------|--|--------------------------|--|--------------------|--|------------------------|--|-------------|
|   | All rights reserved<br>Department HCS - CN | Created by<br>LINI                               |  | Inspected by<br>LIANL |  | Standardisation<br>LIANL |  | Date<br>2022-11-02 |  | State<br>Final release |  |             |
| HARTING Customised Solutions<br>D-32339 Espelkamp |  | Title<br>M23_19P FE,Int-thread,STR PUR cable,xxM |  |                       |  |                          |  |                    |  | Doc-Key / ECM-Nr.<br>/ |  |             |
| Type<br>TB  |  | Number<br>2137 35 00 D 74 XXX                    |  |                       |  |                          |  |                    |  | Rev.<br>A              |  | Page<br>1/1 |

| Rev. | Description  | Appr.   | Date     |
|------|--------------|---------|----------|
| A    | First issue. | Ivy Lin | 11/02/22 |