

## Marker for terminal blocks - UC-TM 8 BU CUS - 0824598

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Marker for terminal blocks, can be ordered: by sheet, blue, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56



### Your advantages

- ✓ The UC-TM ... UniCard labeling range includes markers for products with tall marker grooves
- ✓ Labeling service: Phoenix Contact can custom-label all UniCard markers according to your requirements
- ✓ The multi-section marking strips are easy to fit and can be easily separated if required
- ✓ The sheets provide space for including function texts
- ✓ The markers support multi-line labeling
- ✓ The format automatically ensures printing with a high degree of positioning accuracy



### Key Commercial Data

Packing unit	1 pc
Country of origin	Poland

### Technical data

#### Dimensions

Width (a)	8 mm
-----------	------

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 120 °C
Recommended storage conditions	23 °C/50 % relative humidity. Storage in a dry and dark place in the original packaging is recommended.

#### General

Color	blue
Type	high
Components	free from silicone and halogen

# Marker for terminal blocks - UC-TM 8 BU CUS - 0824598


## Technical data

### General

Material	PA
Flammability rating according to UL 94	V2
Wipe resistance	DIN EN 61010-1 (VDE 0411-1)
Number of individual labels	56
Number of individual labels per row	7
Mounting type	snap into tall marker groove
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 2
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 2
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 2
Testing substances harmful to the wetting properties of lacquers (LABS conformity)	VW PV 3.10.7:2005-02
Result	Test passed
UV resistance	Following ISO 4892-2:2013-03
Result	Test passed
Test duration	96 h

## Drawings

Schematic diagram

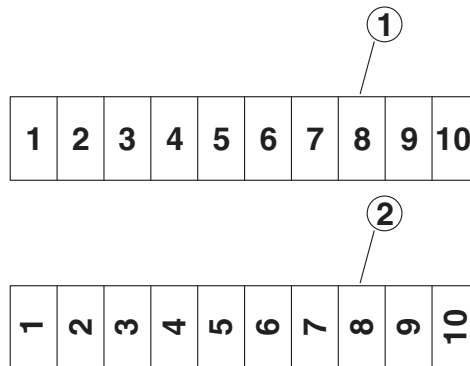

- ① Horizontal
- ② Vertical

## Classifications

eCl@ss

eCl@ss 10.0.1	27141137
eCl@ss 11.0	27281101
eCl@ss 4.0	24190200

## Marker for terminal blocks - UC-TM 8 BU CUS - 0824598

### Classifications

#### eCl@ss

eCl@ss 4.1	24190200
eCl@ss 5.0	27141100
eCl@ss 5.1	27141100
eCl@ss 6.0	27141100
eCl@ss 7.0	27141137
eCl@ss 9.0	27141137

#### ETIM

ETIM 2.0	EC000761
ETIM 3.0	EC000761
ETIM 4.0	EC000761
ETIM 6.0	EC000761
ETIM 7.0	EC000761

#### UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121410
UNSPSC 11	39121410
UNSPSC 12.01	39121410
UNSPSC 13.2	39131505
UNSPSC 18.0	39131505
UNSPSC 19.0	39131505
UNSPSC 20.0	39131505
UNSPSC 21.0	39131505