


REV. 1 4/1/97

COIL: @ +25° C  
 RESISTANCE 700 OHMS ± 10%  
 NOMINAL VOLTAGE 26.5 VDC  
 MUST OPERATE 13.5 VDC  
 MUST RELEASE 1.5 VDC

ENVIRONMENT:  
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's  
 SHOCK 100 g's 6 ± 1 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

CUSTOMER DATA SHEET

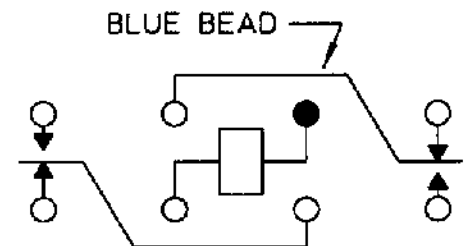

CONTACT RATING: RESISTIVE 5A LAMP  
 400mA, INDUCTIVE 1.875 AMP (200mH)  
 28VDC 100,000 OPERATIONS (LAMP & IND.  
 EXTRAPOLATED FROM RES. 5A RATING

DR. R.B. 1/24/95 *CKA/Le/2003*



CUST. C. I. I. STD.  
 CUST. NO. \_\_\_\_\_

TYPE HFW5A RELAY

HFW5A1131K00