

Ratings

Voltage: 300 V
Temperature: -80~200 °C
Flammability: VW-1
Oil resistance: 60 °C
≥50% elongation and tensile strength after aging

Conductor

Conductor count: 1
Gauge: 16 AWG 1.34 mm²
Material: tinned copper strands
Strand size: Ø0.3 mm x 19
Resistance at 20 °C: 14.6 Ω /km max


Insulator

Material: Fluorinated ethylene propylene (FEP)
Color: brown
Diameter: Ø2.16 ±0.10 mm
Nominal thickness: 0.33 mm
Resistance at 20 °C: 2.5 MΩ /kft min

Wire marking: E339579 UL AWM STYLE 1332 16AWG 200°C 300V
VW-1 --- cUL AWM I A/B 200°C 300V FT1 TENSILITY

Mechanical Tests

After aging at 232±1°C for 7 days
Minimum tensile strength 1.76 kgf/mm²
Minimum elongation 200% original

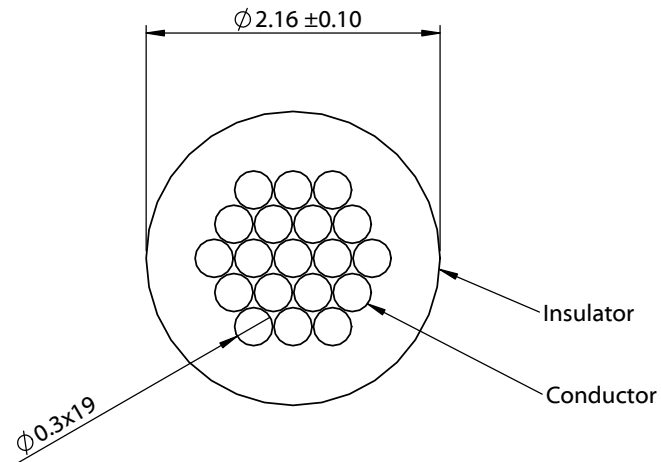

Revision:	Date:	Description:
A	5/23/2022	Initial release

Prepared: MP <small>Digitally signed by MP Date: 2022.05.24 15:49:40 -07'00'</small>	Notes:
Verified: PB <small>Digitally signed by PB Date: 2022.05.27 14:05:24 -07'00'</small>	RoHS compliant
Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Function test: no open, no short circuit, no Intermittent
	Description: Wire, hook-up, TS, 16 AWG, UL 1332, 300V, 200C, 2.16 mm, FEP, brown

TENSILITY

tel 1.541.323.3228 800 877.670.7118
fax 1.541.323.4202 web tensility.com

Size: A	Part number: 30-02540
Scale: 18:1	Sheet 1 of 1