


# SCH4312

## SMD POWER INDUCTORS

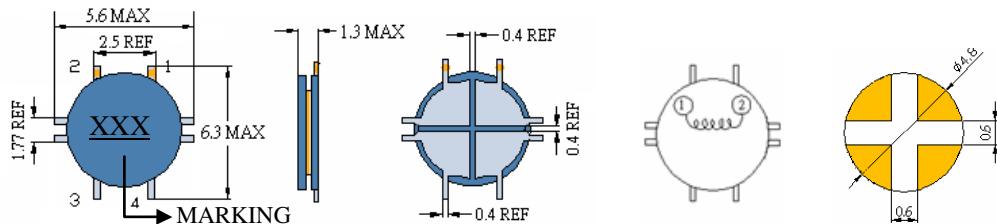

### • Features

1. Open frame construction
- 2 Excellent Power Density
- 3 Engineered to Provide High Efficiency
- 4 Low Profile

## ELECTRICAL CHARACTERISTICS


Part Number	Inductance (uH) (1)	Test Frequency	DC Resistance (Ω MAX) (2)	Saturation Current (A) (3)	Temperature Current (A) (4)
SCH4312-2R2	2.2	100KHZ	104m	1.30	1.38
SCH4312-3R3	3.3	100KHZ	145m	1.00	1.20
SCH4312-4R7	4.7	100KHZ	200m	0.84	1.00
SCH4312-6R8	6.8	100KHZ	270m	0.74	0.88
SCH4312-100	10	100KHZ	403m	0.56	0.74
SCH4312-120	12	100KHZ	456m	0.53	0.64
SCH4312-150	15	100KHZ	570m	0.50	0.62
SCH4312-180	18	100KHZ	690m	0.45	0.56
SCH4312-220	22	100KHZ	930m	0.37	0.50
SCH4312-270	27	100KHZ	1.00	0.35	0.45
SCH4312-330	33	100KHZ	1.32	0.33	0.40
SCH4312-390	39	100KHZ	1.55	0.28	0.38
SCH4312-470	47	100KHZ	1.72	0.26	0.34
SCH4312-560	56	100KHZ	1.95	0.25	0.32
SCH4312-680	68	100KHZ	2.60	0.23	0.30
SCH4312-820	82	100KHZ	2.95	0.21	0.28
SCH4312-101	100	100KHZ	3.36	0.18	0.26

(1). Inductance tolerance  $\pm 20\%$  tested at 0.25V, 0ADC and 25°C.

(2). DCR measured at 25°C.

(3). The DC current at which the inductance decreases by 10% from its initial value.

(4). The DC current that results in a 40°C temperature rise from 25°C ambient.

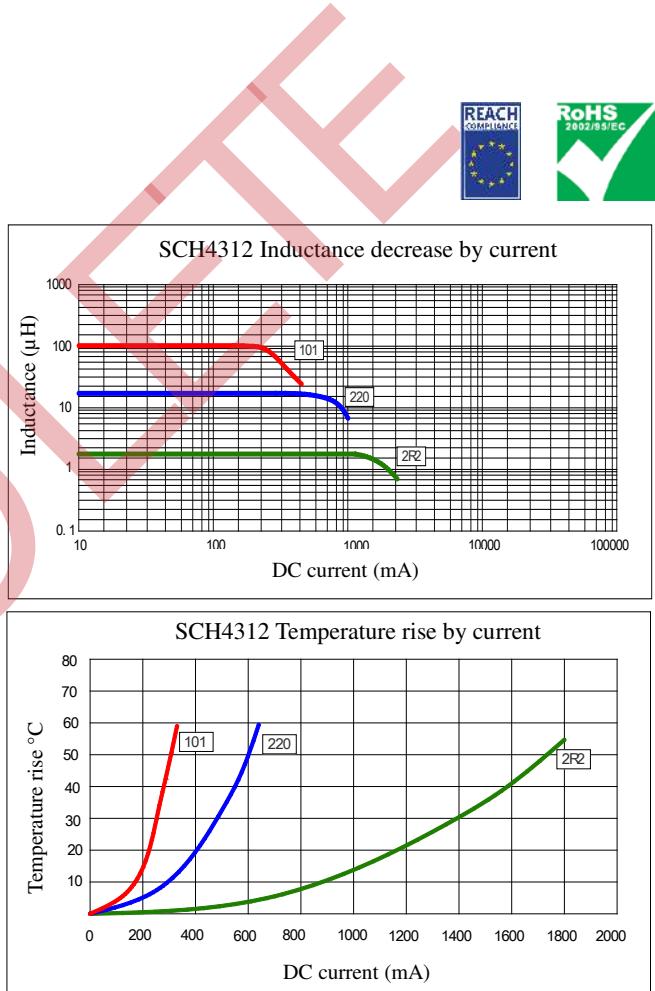

[Click here for QUANTITY PER REEL & PACKING INFORMATION](#)

Custom versions available upon request.

© 2019 Signal Transformer –Specification subject to change without notice. 12.19



[belfuse.com/signal](http://belfuse.com/signal)