
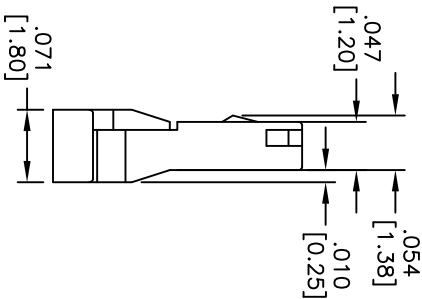
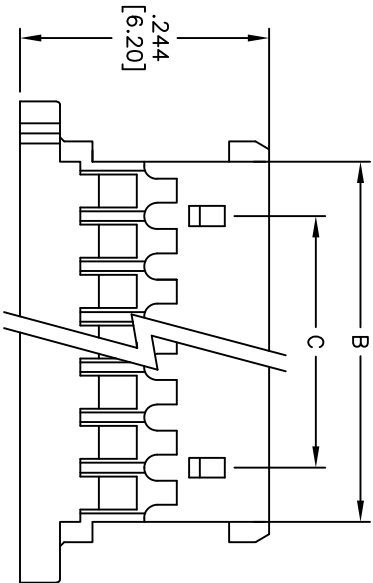


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/30/10	
A		REVISED SHAPE	6/18/12	

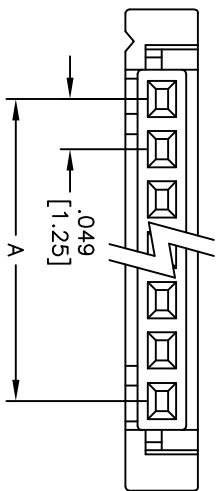

SPECIFICATIONS:

Material:
 Insulator: PBT, rated UL 94V-0
 Insulator color: White

Electrical:
 Voltage rating: 125 VAC/DC max
 Current rating: 1 Amp max
 Insulation resistance: 100 Mohms min
 Dielectric withstanding voltage: 250 VAC for 1 minute

Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant.



Positions: 2 thru 16, 18, 20, 22, 24, 26, 28, 30
 A = .049 [1.25] X No. of Spaces
 B = .049 [1.25] X No. of Spaces + .057 [1.45]
 C = .049 [1.25] X No. of Spaces - .049 [1.25]
 DIM. C 2P, 3P (NONE)

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .049 [1.25] PITCH CRIMP HOUSING
 SINGLE ROW, 2 THRU 30 POSITIONS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
.X	± .10	ØX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS		DATE	
DRAWN	AY	11/30/10	
CHECKED	AH	11/30/10	
APPROVED			
REF:	S00723T	SCALE:	NTS
SHEET	1	OF	1