


REV	ECN	APP'D
-	6648	MD 12/22/2010

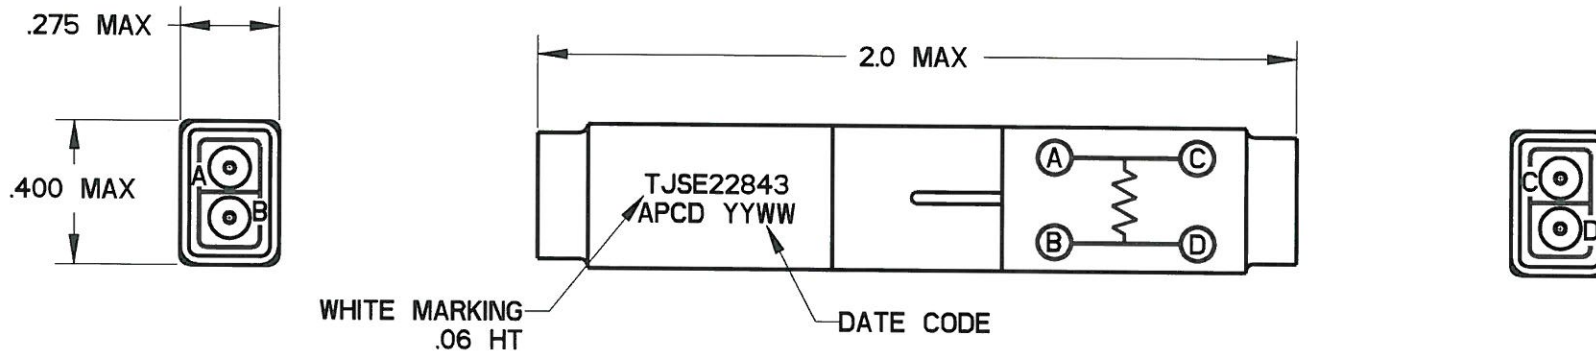

- NOTES:
- MATERIALS:
HOUSING: POLYETHERIMIDE, COLOR BLACK
GROMMET: SILICONE ELASTOMER, COLOR BLUE
INTERNAL CONTACT: COPPER ALLOY, GOLD PLATED,
PER MIL-DTL-45204, TYPE I, GRADE C, CLASS I
50 MICROINCH MIN. OVER NICKEL PER SAE-AMS-QQ-N-290,
CLASS 1, 50/30 MICROINCH MIN.
CONTACT RETAINER: STAINLESS STEEL
 - SPLICE ACCEPTS (4) MATING M39029/1-100 CONTACTS (INCLUDED)
 - PART COMPLIES TO ALL REQUIREMENTS PER SAE-AS81714.
 - RESISTOR: 100Ω, 1/4W, ±5%, RLR07C1000JS

DIMENSIONS ANSI Y14.5M UNITS: INCHES Pro/E FILE	TOLERANCES .XX ±0.01 .XXX ±0.005 ANGLES ±2.0°	PROJECTION 	Amphenol Pcd SPECIFICATION DRAWING		TITLE WIRE SPLICE, ELECTRONIC RESISTOR, 100Ω, 1/4W, 5% SIZE 22	
			ENGR M. DiGIACOMO 12/14/2010			
ORIGINAL 	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD BEVERLY, MA, USA	CHKD		SIZE A	DWG NO. TJSE22843_C	REV -
		APPD 12/22/2010		CODE: 58982	SCALE: 2:1	SHEET 1 OF 1