

B

A




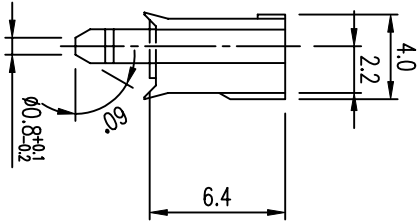


TABLE 1


PART NO.	NO. OF POS.	DIMENSIONS	
		A _{+0.02} -0.05	B \pm 0.1
WH2D-1/WH2D-1LF	2	7.5	2.5
WH3D-1/WH3D-1LF	3	10.0	5.0
WH4D-1/WH4D-1LF	4	12.5	7.5
WH5D-1/WH5D-1LF	5	15.0	10.0
WH6D-1/WH6D-1LF	6	17.5	12.5
WH7D-1/WH7D-1LF	7	20.0	15.0
WH8D-1/WH8D-1LF	8	22.5	17.5 _{+0.15} -0.10
WH9D-1/WH9D-1LF	9	25.0	20.0 _{+0.15} -0.10
WH10D-1/WH10D-1LF	10	27.5 \pm 0.3	22.5 _{+0.15} -0.10
WH11D-1/WH11D-1LF	11	30.0 \pm 0.3	25.0 _{+0.15} -0.10
WH12D-1/WH12D-1LF	12	32.5 \pm 0.3	27.5 _{+0.15} -0.10
WH13D-1/WH13D-1LF	13	35.0 \pm 0.3	27.5 _{+0.15} -0.10

SUFFIX "LF" SEE NOTE 5

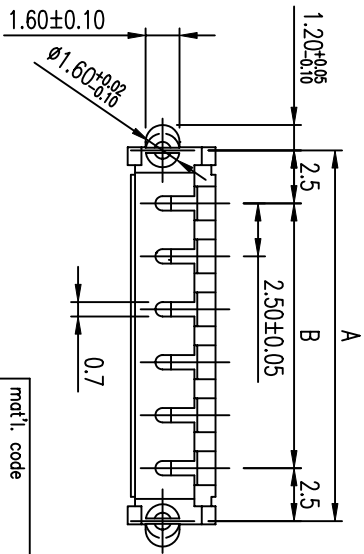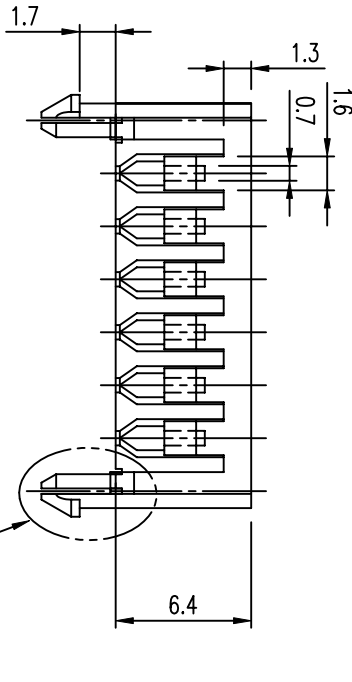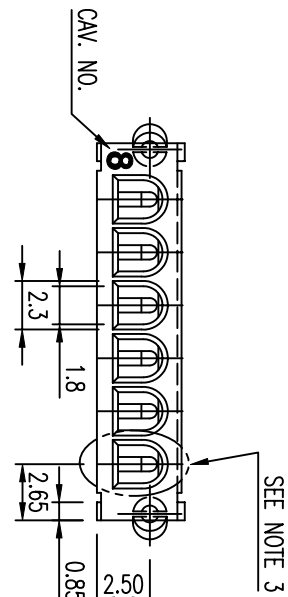

SEE NOTE 3

SEE NOTE 3

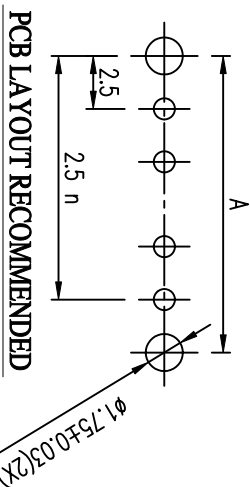

PCB LAYOUT RECOMMENDED

NOTES:

1. MATERIAL : NYLON 66, UL94V-0 RATED.
2. ORDERING INFORMATION: SEE TABLE 1
3. FLASH : 0.2 MAX.
4. APPEARANCE : 0.3 MAX.
5. THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS (WAVE SOLDER & SMT)

mat'l. code		dr		dtde		tolerances unless otherwise specified		CUSTOMER COPY		title	
ltr	ecn no	dr	dtde	linear	angles	projection	scale	product family	product	size	dwg no
A	T04-0027	M	01/19/04	.XX ±.20	0° ±2°	MM	3:1	FCI	WIRE HOLDER	2.5MM PITCH	
B	T05-0219	L	09/23/05	.XXX ±.10							

sheet		revision		sheet		sheet		sheet		sheet	
Index	sheet	revision	sheet	1	B						

ACAD

3

code code 22526

4

1 | 2

3 |

4