
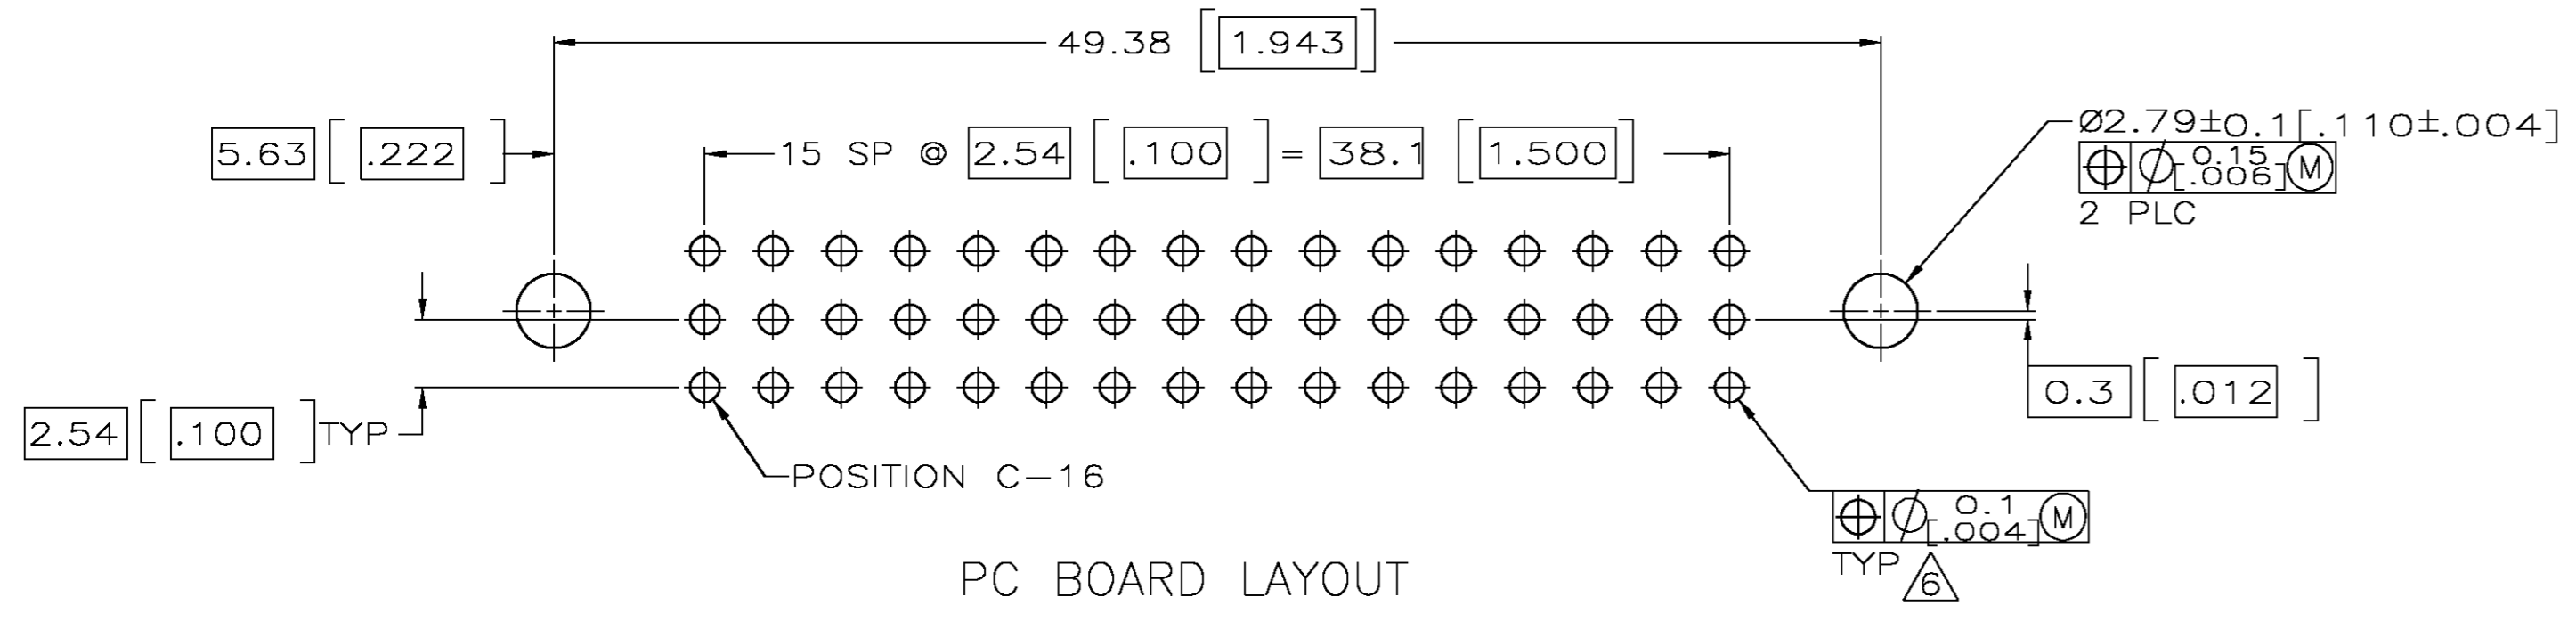
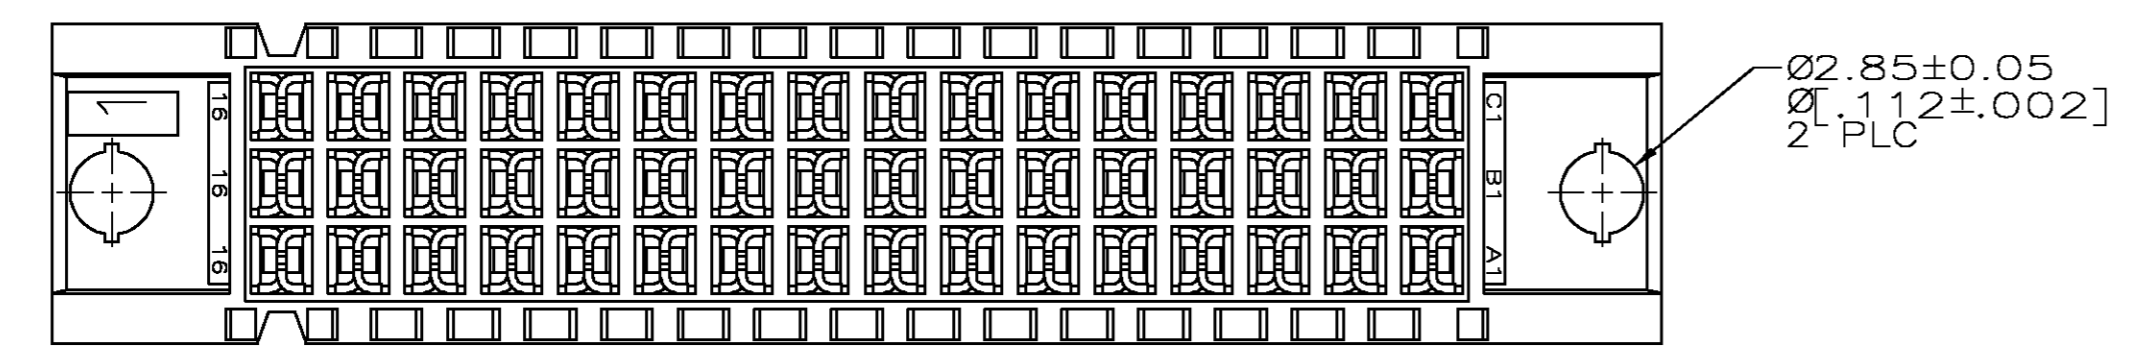
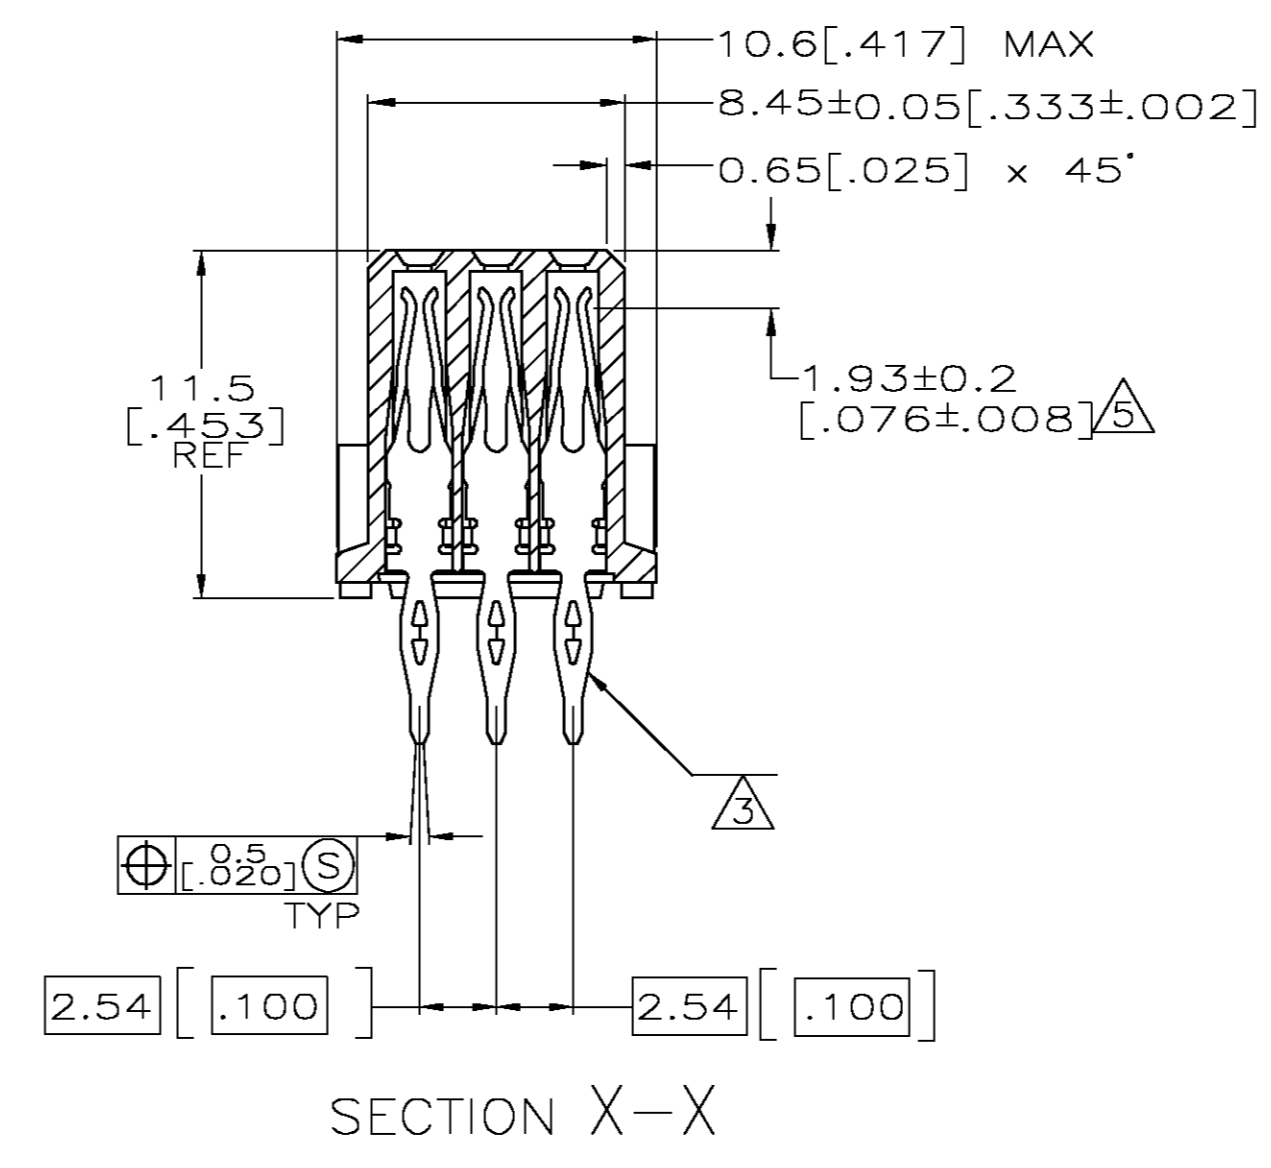
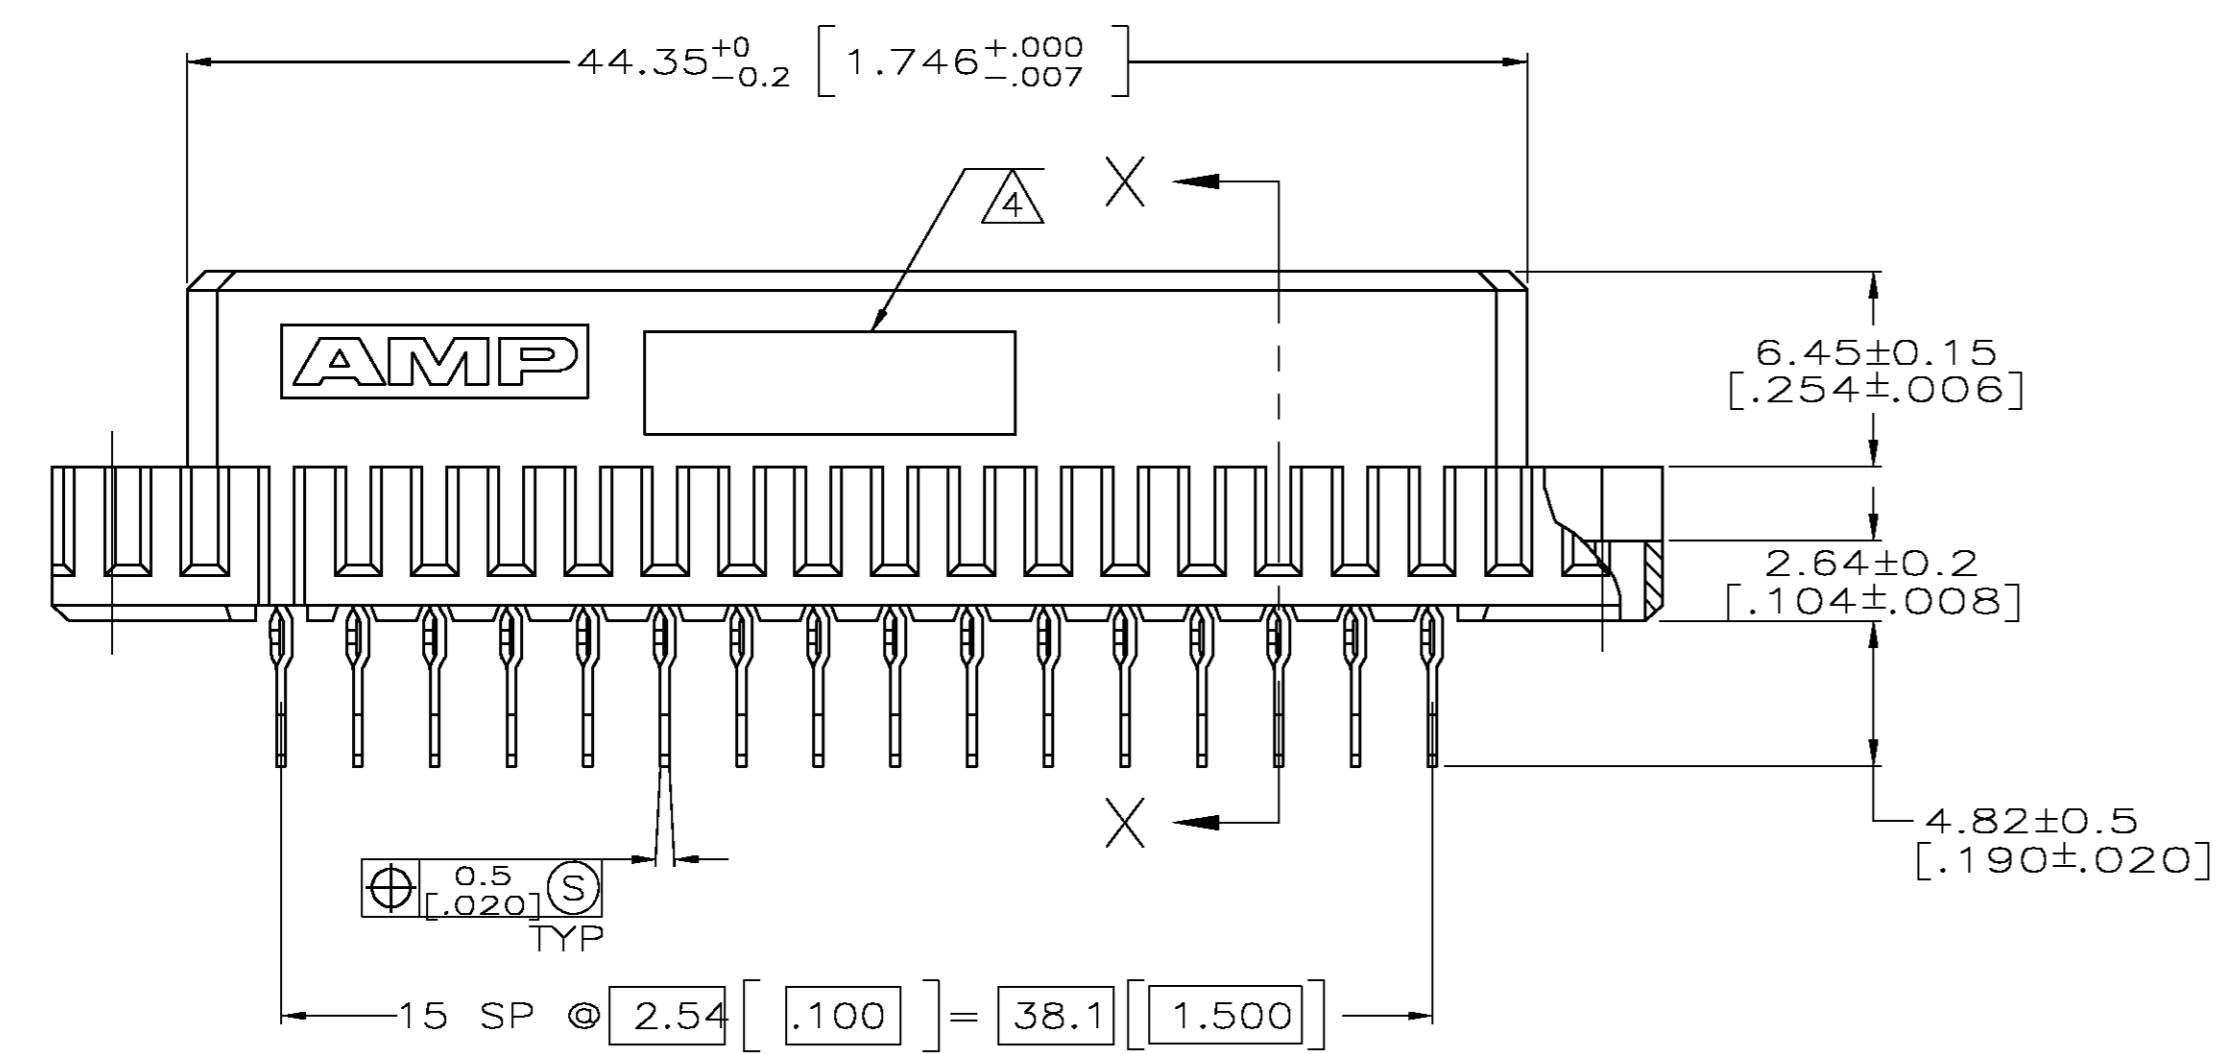


- ① HOUSING MATERIAL: GLASS-FILLED POLYMER. COLOR: GRAY.
- ② CONTACT MATERIAL: COPPER ALLOY.
- ③ CONTACT FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN ON POSTS.
- ④ PART NUMBER, DATE CODE IDENTIFICATION, CSA LOGO IN THIS APPROXIMATE AREA.
- ⑤ POINT OF MEASUREMENT FOR DIN 41612 CLASS 2 FINISH.
- ⑥ ACTION PIN POSTS REQUIRE 1.57[.062] MIN THICK PC BOARD. RECOMMENDED PC BOARD HOLES ARE $\varnothing .151 \pm 0.02$ [.0453 ± .001] DRILLED HOLE WITH 0.02-0.07 [.001-.003] COPPER AND 0.008 [.0003] MIN TIN-LEAD PLATING. FINISHED HOLE AFTER PLATING, $\varnothing .94-1.09$ [.037-.043].

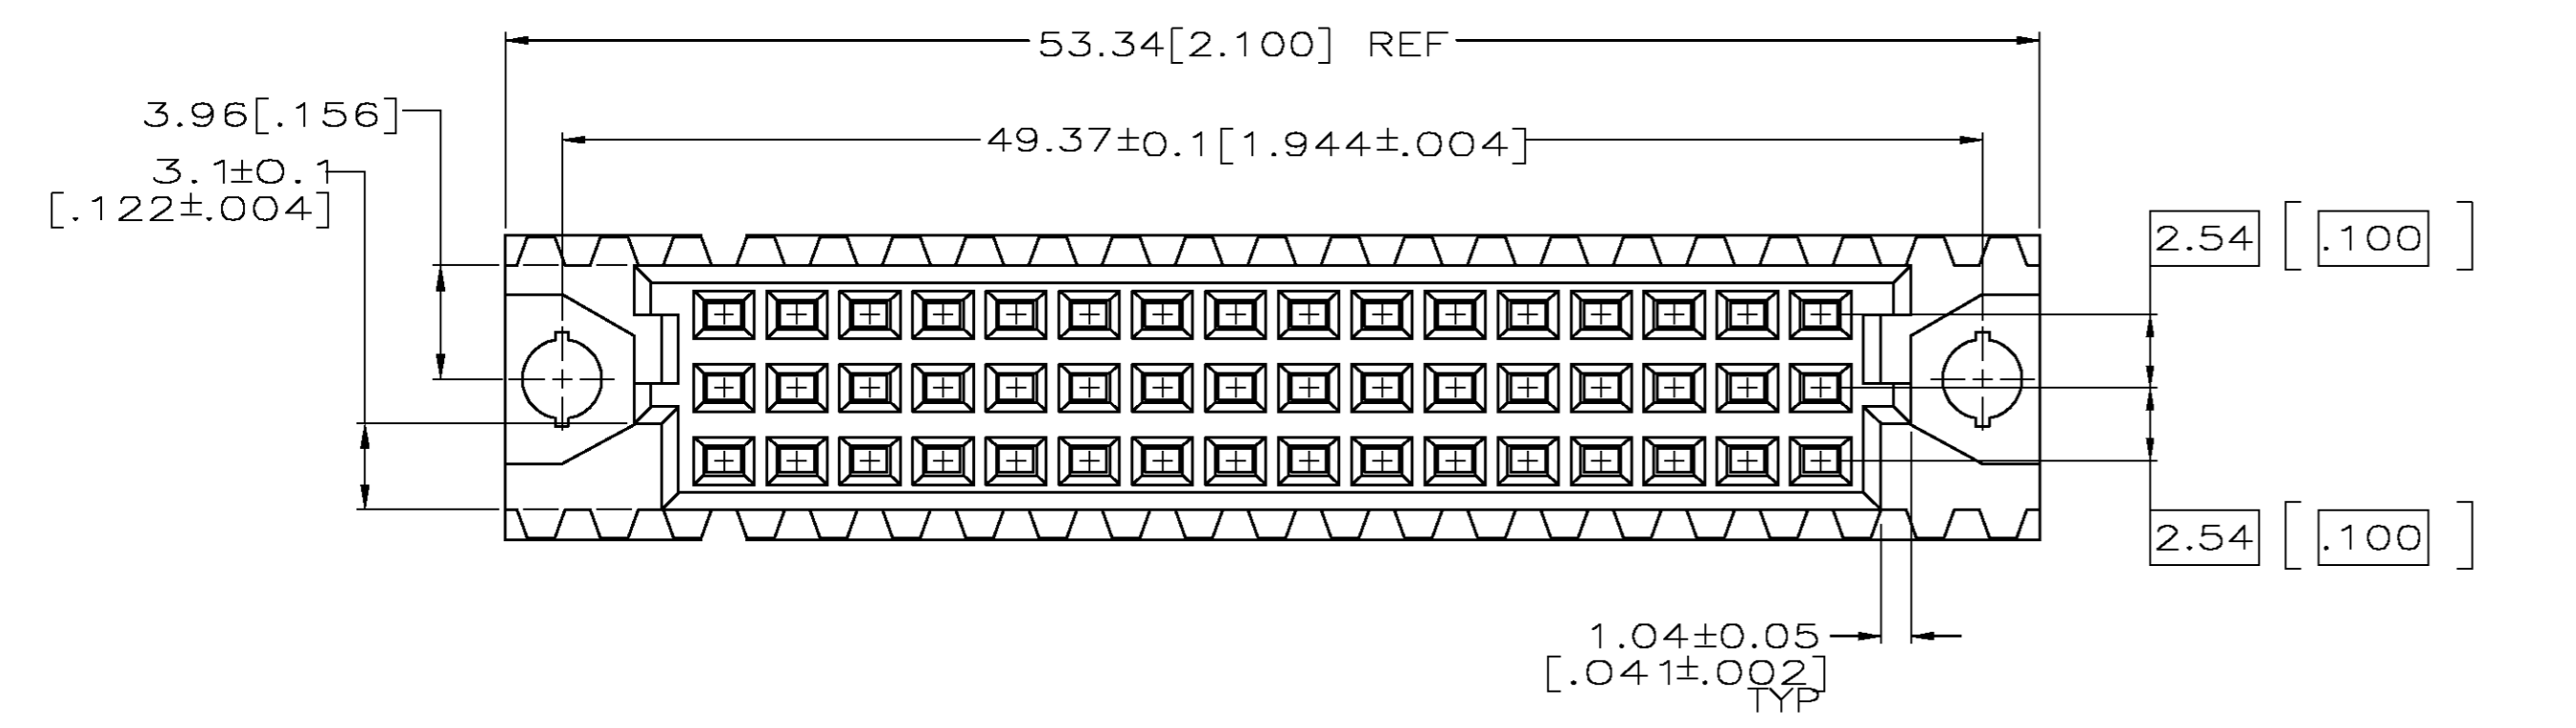

③	1 THRU 16	X	X	X	48	5535034-5
③	1 THRU 16	X	X	X	48	5535034-4
NOTES	POSITIONS LOADED	C	B	A	NO. OF LOADED POSITION	ASSY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMN: J. POLIGNONE 18APR05. GSK: A. SHARPE 18APR05. NAME: A. SHARPE 18APR05. Tyco Electronics Corporation, Harrisburg, Pa 17105-3608.

ASSEMBLY, RECEPTACLE, EUROCARD, TYPE C/2, LEAD-FREE, 48, .190 TOOLLESS PRESS-FIT.

SIZE: A1. CAGE CODE: 00779. DRAWING NO: 5535034. RESTRICTED TO: CUSTOMER DRAWING. SCALE: 4:1. SHEET: 1 OF 1. REV: 0.