



insulation monitoring relay for ungrounded (IT) networks up to 250 V AC, 15-400 Hz and up to 300 V DC measuring range 1-100 kohm supply voltage 24-240 V AC/DC 22.5 mm, 1 changeover contact screw terminal

product brand name	SIRIUS
product designation	Insulation monitoring relay with analog setting
product type designation	3UG4
General technical data	
product function	Insulation monitor
type of voltage	
• for monitoring	AC/DC
• of the operating voltage for actuation	AC/DC
• of the control supply voltage	AC/DC
surge voltage resistance rated value	6 000 V
protection class IP	IP20
thermal current of the switching element with contacts maximum	4 A
reference code according to IEC 81346-2	K
Substance Prohibitance (Date)	05/01/2012
Product Function	
product function	
• error memory	Yes
• adjustable open/closed-circuit current principle	No
• manual RESET	Yes
Control circuit/ Control	
control supply voltage at AC	
• at 50 Hz rated value	24 ... 240 V
• at 60 Hz rated value	24 ... 240 V
control supply voltage at DC rated value	24 ... 240 V
operating range factor control supply voltage rated value at DC	
• initial value	0.85
• full-scale value	1.1
operating range factor control supply voltage rated value at AC at 50 Hz	
• initial value	0.85
• full-scale value	1.1
operating range factor control supply voltage rated value at AC at 60 Hz	
• initial value	0.85
• full-scale value	1.1
Measuring circuit	
measurable line frequency	50 ... 60 Hz
measurable voltage at AC	0 ... 250 V

Auxiliary circuit		
number of NC contacts for auxiliary contacts	0	
number of NC contacts delayed switching	0	
number of NO contacts for auxiliary contacts	0	
number of NO contacts delayed switching	0	
number of CO contacts		
• delayed switching	1	
Main circuit		
operating frequency rated value	15 ... 400 Hz	
Connections/ Terminals		
product component removable terminal for auxiliary and control circuit	No	
type of electrical connection	screw-type terminals	
type of connectable conductor cross-sections		
• solid	1x (0.5 ... 4.0 mm ²), 2x (0.5 ... 2.5 mm ²)	
• finely stranded with core end processing	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²)	
• finely stranded without core end processing	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²)	
• at AWG cables solid	1x (20 ... 12), 2x (20 ... 14)	
• at AWG cables stranded	1x (18 ... 14), 2x (18 ... 16)	
connectable conductor cross-section		
• solid	0.5 ... 4 mm ²	
• finely stranded with core end processing	0.5 ... 2.5 mm ²	
• finely stranded without core end processing	0.5 ... 2.5 mm ²	
AWG number as coded connectable conductor cross section		
• solid	20 ... 12	
• stranded	18 ... 14	
tightening torque with screw-type terminals	0.6 ... 0.8 N·m	
Installation/ mounting/ dimensions		
mounting position	any	
fastening method	snap-on fastening on 35 mm standard rail	
height	78 mm	
width	22.5 mm	
depth	100 mm	
required spacing		
• with side-by-side mounting		
— forwards	0 mm	
— backwards	0 mm	
— upwards	0 mm	
— downwards	0 mm	
— at the side	0 mm	
• for grounded parts		
— forwards	0 mm	
— backwards	0 mm	
— upwards	0 mm	
— at the side	0 mm	
— downwards	0 mm	
• for live parts		
— forwards	0 mm	
— backwards	0 mm	
— upwards	0 mm	
— downwards	0 mm	
— at the side	0 mm	
Ambient conditions		
ambient temperature during operation	-25 ... +60 °C	
Certificates/ approvals		
General Product Approval	EMC	Declaration of Conformity



[Confirmation](#)



Declaration of Conformity	Marine / Shipping	other
---------------------------	-------------------	-------



EG-Konf.



DNV



RMRS

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UG4582-1AW31>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UG4582-1AW31>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3UG4582-1AW31>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UG4582-1AW31&lang=en

Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3UG4582-1AW31/manual>

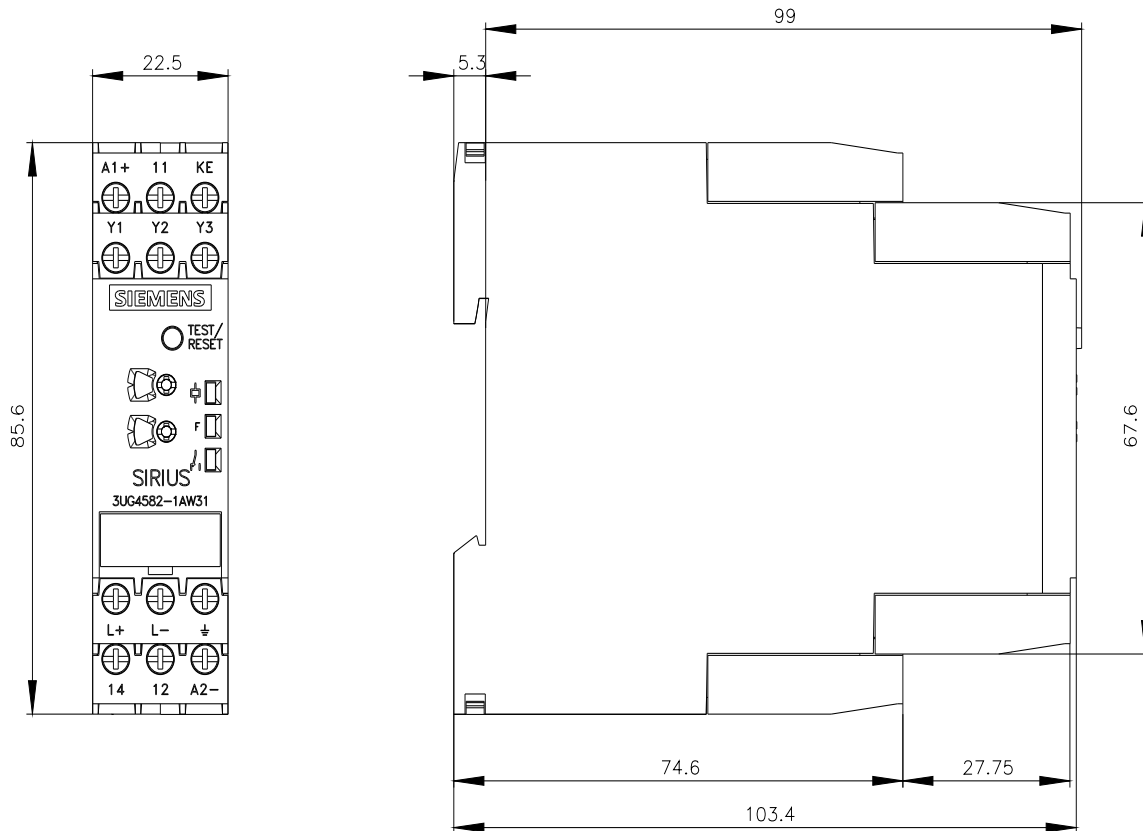

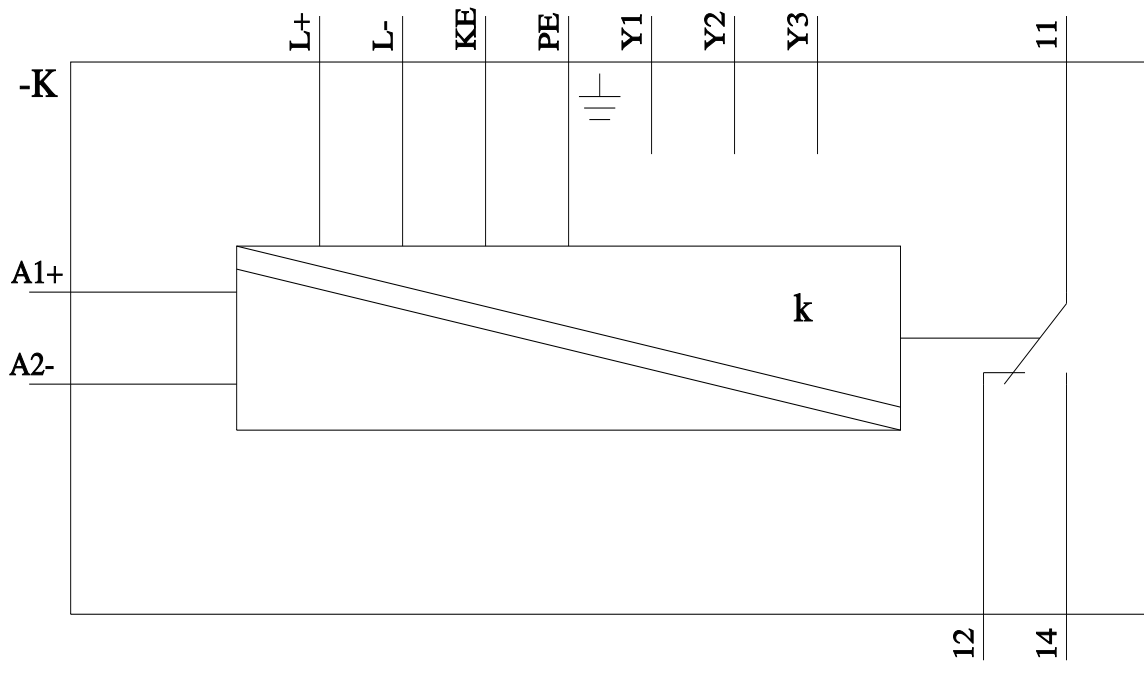

last modified:

12/1/2021 