

Ratings

Voltage: 300 V
 Temperature: -25 ~ 80 °C
 Flammability: VW-1

Conductor

Conductor count: 3
 Gauge: 26 AWG 0.14 mm²
 Material: tinned copper strands
 Strand size: Ø 0.16 x 7
 Resistance at 20 °C: 150 Ω /km max

Insulator

Material: PVC
 Color: black, white, red
 Diameter: Ø 1.1 ± 0.10 mm
 Nominal thickness: 0.29 mm
 Resistance at 20 °C: 10 MΩ /km min



Outer jacket

Material: PVC
 Color: black
 Diameter: Ø 4 ± 0.20 mm
 Nominal thickness: 0.80 mm

Wire marking: E339579 UL AWM STYLE 2464 26 AWG 80°C
 300V VW-1 --- cUL AWM I/II A 80°C 300V FT1 LF TENSILITY

Tests

Insulation tensile strength: 2.11 kgf/mm²
 Jacket tensile strength: 1.05 kgf/mm²
 After aging at 113 ± 2 °C for 7 days:
 Minimum tensile strength 70 % original
 Minimum elongation 65 % original
 Heat shock: 121 ± 1 °C / 1 hour, no observed degradation
 Deformation: 121 ± 1 °C / 1 hour, ≤ 50 %
 Cold bend: -10 ± 2 °C / 1 hour, no observed cracking

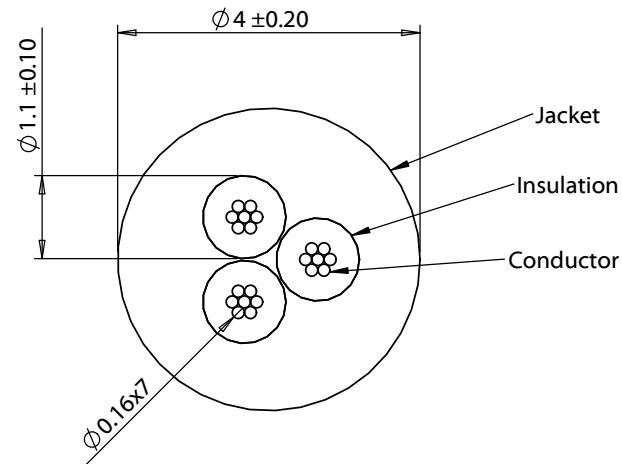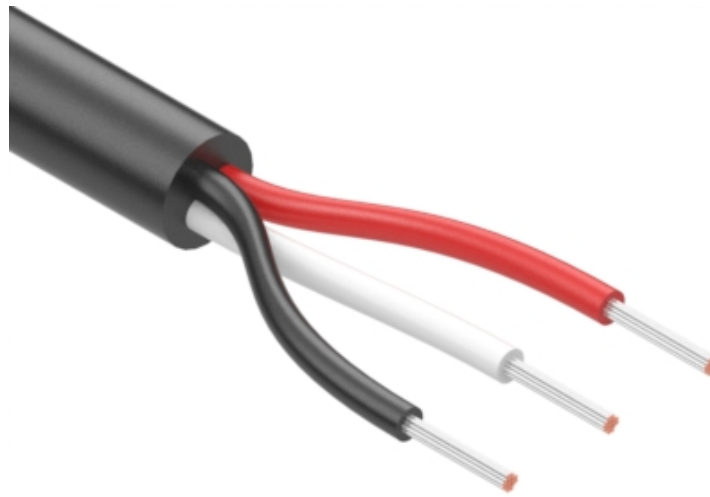

Revision:	Date:	Description:
A	6/30/2014	Initial release
A1	09/06/2018	Increased operating temperature range

Prepared:
GL
Digitally signed by GL
 Date: 2018.09.06
 11:43:06 -07'00'

Verified:
CH
Digitally signed by CH
 Date: 2018.09.06
 13:23:54 -07'00'

Dimensions are in millimeters.
 Tolerances:
 X: ± 0.5 mm
 X.X: ± 0.3 mm
 X.XX: ± 0.05 mm

Notes:
 RoHS and REACH compliant

Function test: no open, no short circuit, no intermittent

Description:
 Wire, 3C TS, 26 AWG, UL2464, 300V, 80C, 4.0 mm, VW-1, PVC

TENSILITY

tel 1.541.323.3228 800 877.670.7118
 fax 1.541.323.4202 web tensility.com

Size: A	Part number: 30-00377
Scale: 10:1	

Sheet 1 of 1