SIEMENS

Data sheet

3SU1250-0FB10-0AA0



Pushbutton, compact, with extended stroke (12 mm), 22 mm, round, metal, black, pushbutton, raised, momentary contact type, with holder

product brand name	SIRIUS ACT
product designation	Pushbuttons
design of the product	Complete unit
product type designation	3SU1
product line	Metal, shiny, 22 mm
Enclosure	
number of command points	1
Actuator	
design of the actuating element	Flat button with extended stroke
principle of operation of the actuating element	momentary contact type
product extension optional	
light source	No
contact module	Yes
color of the actuating element	black
material of the actuating element	plastic
shape of the actuating element	round
outer diameter of the actuating element	29.5 mm
Front ring	
product component front ring	Yes
design of the front ring	Standard
material of the front ring	Metal, high gloss
color of the front ring	silver
General technical data	
protection class IP	IP66, IP67, IP69(IP69K)
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13
shock resistance	
• acc. to IEC 60068-2-27	Sinusoidal half-wave 50g / 11 ms
 for railway applications acc. to DIN EN 61373 	Category 1, Class B
vibration resistance	
• acc. to IEC 60068-2-6	10 500 Hz: 5g
 for railway applications acc. to DIN EN 61373 	Category 1, Class B
operating frequency maximum	3 600 1/h
mechanical service life (switching cycles) typical	5 000 000
reference code acc. to IEC 81346-2	S
Ambient conditions	
 ambient temperature during operation 	-25 +70 °C
 ambient temperature during storage 	-40 +80 °C

environmental catego 60721	bry during operation acc.	to IEC 3M	3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95 %)				
Installation/ mounting	g/ dimensions						
height			40 mm				
width			30 mm				
shape of the installation opening			round				
mounting diameter			22.3 mm				
positive tolerance of installation diameter			0.4 mm				
mounting height			32.5 mm				
installation width	stallation width			29.5 mm			
installation depth		30.	30.9 mm				
Certificates/ approval	s						
General Product Approval			Declaration of Confo	rmity	Test Certificates		
SP M		EHC	<u>Miscellaneous</u>	CE EG-Konf.	<u>Special Test</u> <u>Certificate</u>		
Test Certificates	other						
<u>Type Test</u> <u>Certificates/Test</u> <u>Report</u>	<u>Confirmation</u>						

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1250-0FB10-0AA0


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1250-0FB10-0AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3SU1250-0FB10-0AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1250-0FB10-0AA0&lang=en

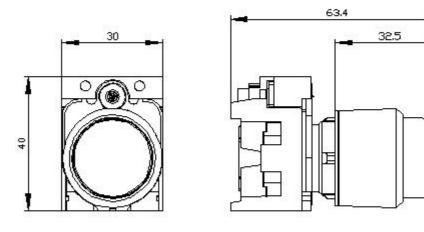



last modified:

8/31/2020 🖸