Type BLR-406-G Fuse Block 6 Pole - Regular, ATC/ATO Auto Blade With 6-Position Grounding Block



www.optifuse.com

(619) 593-5050

Specifications:

Max Voltage: 32VDC

Max Current Rating: 30A per Circuit - 100A Max Fuse Type: Regular Auto Blade (APR / ANR series)

(Fuses or Circuit Breakers)

Mounting: 4 mounting holes, 4.5mm diameter

Temperature Rating: -20° C ~ +85° C

Material:

Housing & Base: PBT, Black


Cover: PC, Clear

Terminals: Tinned Copper

Button: PA, Red

Note: Push down Button to open/close

Mechanical Dimensions: Inches [mm]

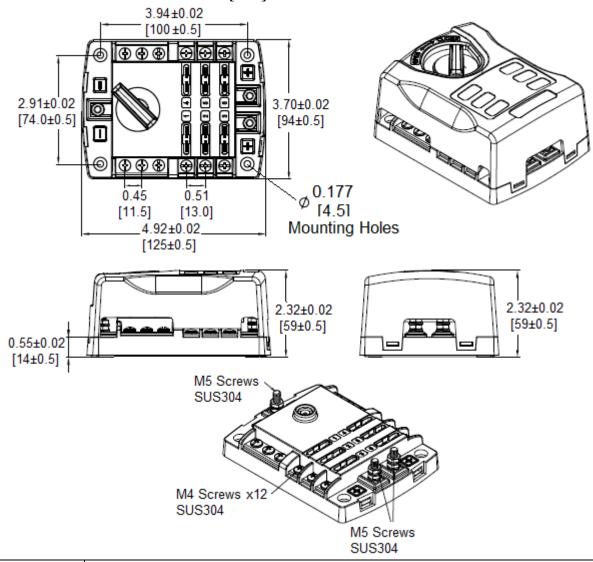

Warning:

-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.



-Avoid contact of device with chemical solvent. Prolonged contact may damage the device performance.

Note: All specifications subject to change without notice.

Rev A 08/2018 - Page: 1/1

Code S02-01H