



UNIT: mm

5000 ± 50mm

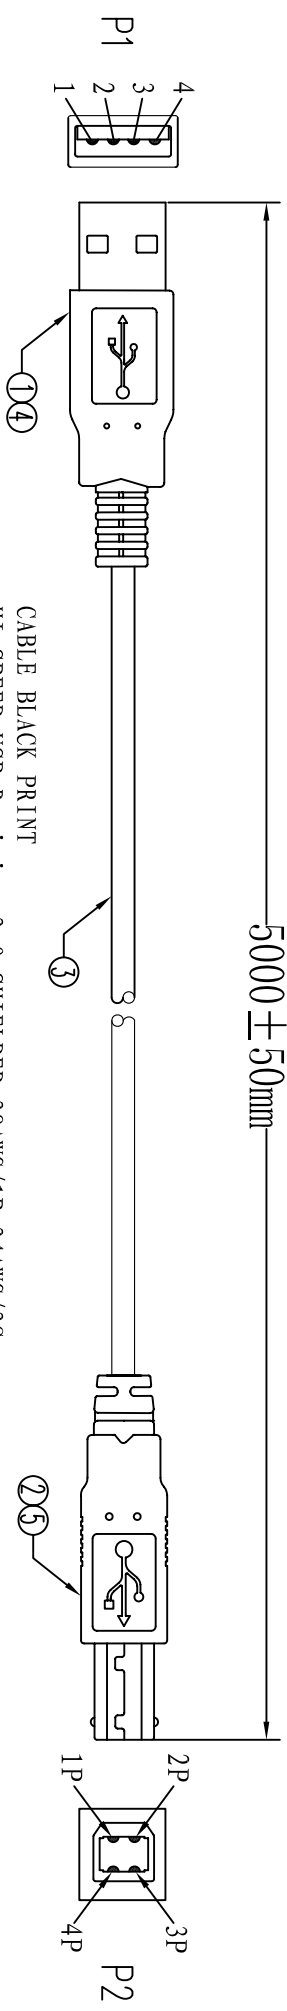


CABLE BLACK PRINT
 HI-SPEED USB Revision 2.0 SHIELDED 28AWG/1P+24AWG/2C
 E189529 **RA** AWM STYLE 2725 80° C 30V VW-1 VEGA TECH

PIN ASSIGNMENT:

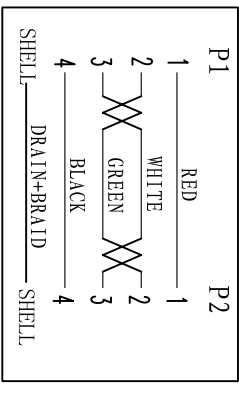

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 5 Ohm(max)
 3. Insulation resistance: 5Mohm(min)
 4. dielectric test: DC 300V

IPCS/PE BAG

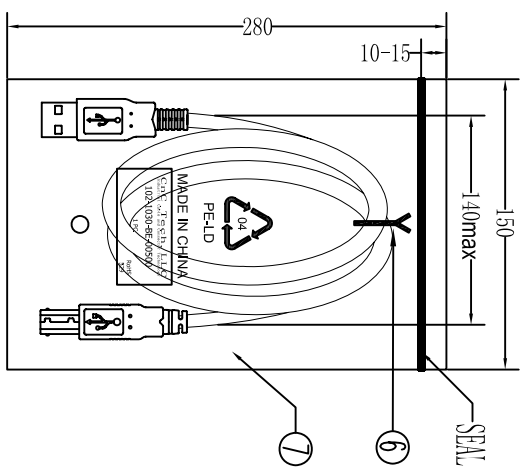

③	PE BAG	1/5	CLEAR SIZE: 360*380*40. 05mm PRINT BLACK"MADE IN CHINA"+ "5PCS"
⑦	PE BAG	1	CLEAR SIZE: 150*280*40. 05mm PRINT BLACK"MADE IN CHINA"+ "1PC"
⑥	TIE	1	WHITE L=120mm
③	OUT JACKET	6g	BEIGE (1V-29#) PVC-40P (MOULD NO: WM-65)
④	OUT JACKET	6g	BEIGE (1V-29#) PVC-40P (MOULD NO: WM-40)
③	CABLE	1	BEIGE (1V-29#) USB2. 0 UL2725 28#/1P+24#/2C+AEB OD: 4. 7mm l=5000 ± 20mm
⑦	CONN	Iset	USB2. 0 B MALE SHELL: NICKEL PIN G/F 3PCS TYPE INSULATOR COLOR: WHITE
①	CONN	Iset	USB2. 0 A MALE SHELL: NICKEL PIN G/F 3PCS TYPE INSULATOR COLOR: WHITE

Cnc Tech, LLC
 Industrial Cable and Connector Technology

DRAWN	ZHONGHS	DRAWING NO	
CHECKED		CUSTOMER	
APPROVAL		ITEM NO.	102-1030-BE-00500
DECIDED		DATE	2012-02-14
VERSIONS/EDITION	A/0	PROJECTION	

A

B

C

D

A

B

C

D