

Ratings

Voltage: 300 V
 Temperature: -25 ~ 80 °C
 Flammability: VW-1

Conductor

Conductor count: 7
 Gauge: 28 AWG 0.09 mm²
 Material: tinned copper strands
 Strand size: $\varnothing 0.127 \times 7$
 Resistance at 20 °C: 239 Ω /km max

Insulator

Material: PVC
 Color: white, black, red, yellow, blue, green, orange
 Diameter: $\varnothing 0.95 \pm 0.10$ mm
 Nominal thickness: 0.26 mm
 Resistance at 20 °C: 10 M Ω /km min



Outer jacket

Material: PVC
 Color: white
 Diameter: $\varnothing 4.45 \pm 0.30$ mm
 Nominal thickness: 0.80 mm

Wire marking: E339579 UL AWM STYLE 2464 28 AWG 80°C 300V VW-1 - - - cUL AWM I/II A 80°C 300V FT1 TENSILITY

Tests

Insulation tensile strength: 2.11 kgf/mm²
 Jacket tensile strength: 1.05 kgf/mm²
 After aging at 113 ±2 °C for 7 days:
 Minimum tensile strength 70 % original
 Minimum elongation 65 % original
 Heat shock: 121 ±1 °C /1 hour, no observed degradation
 Deformation: 121 ±1 °C /1 hour, ≤ 50 %
 Cold bend: -10 ±2 °C /1 hour, no observed cracking

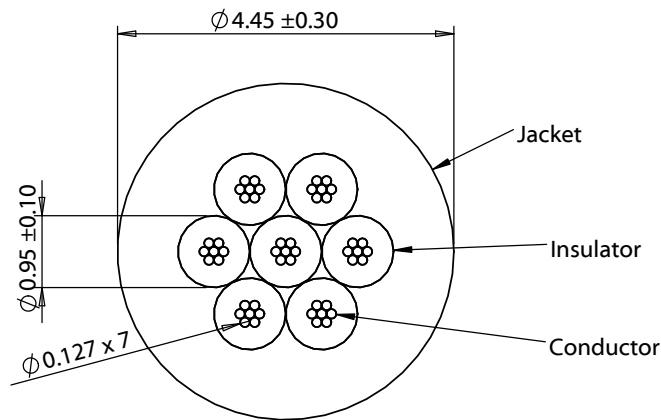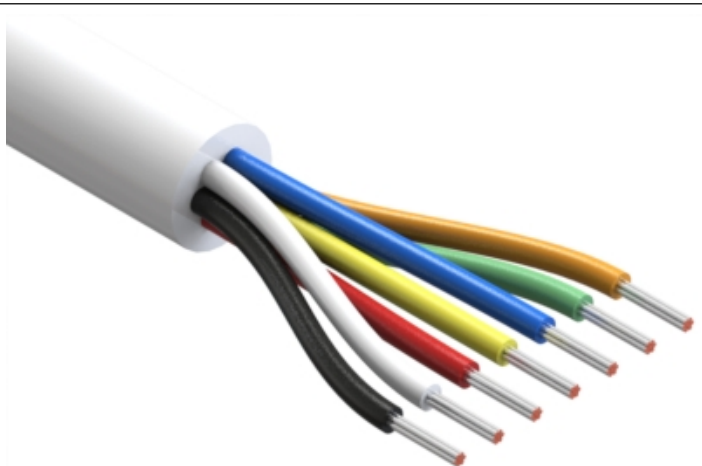

Revision:	Date:	Description:	Prepared: AG <small>Digitally signed by AG Date: 2018.09.05 16:39:20 -07'00'</small>	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	10/13/2015	Initial release	Verified: PS <small>Digitally signed by PS Date: 2018.09.05 17:16:30 -07'00'</small>	RoHS and REACH compliant	
A1	1/26/2016	Updated jacket dimensions	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Function test: no open, no short circuit, no intermittent	
A2	9/5/2018	Increased operating temperature range		Description:	Description: Wire, 7C TS, 28 AWG, UL2464, 300V, 80C, 4.45 mm, VW-1, PVC, white
					Size: A Part number: 30-00517 Scale: 10:1 Sheet 1 of 1