



UNIT: mm

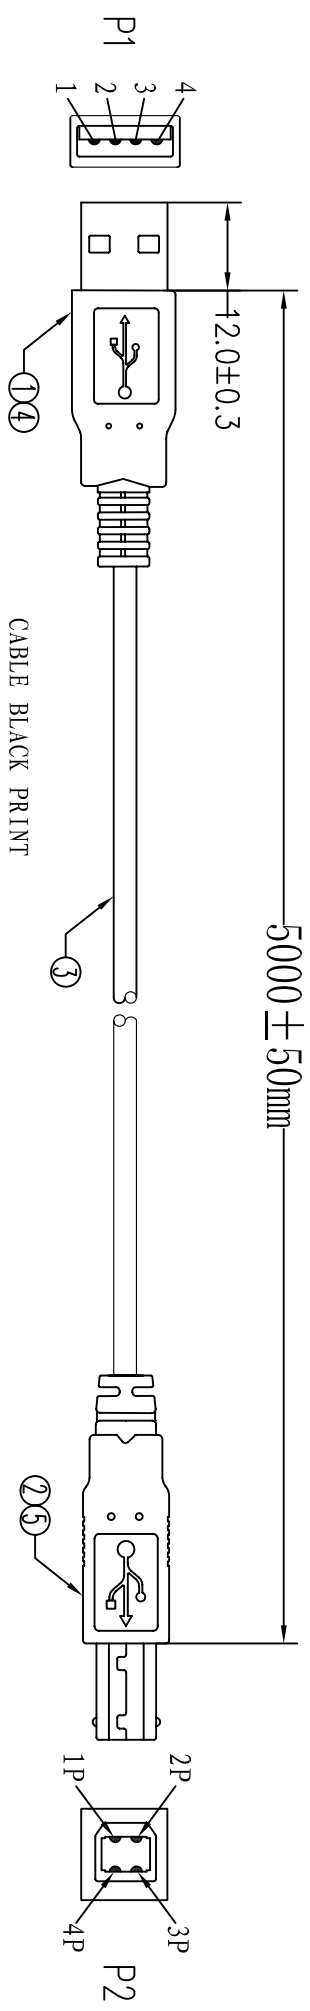


CABLE BLACK PRINT
 USB CABLE E189529 **RU** AWM 2725 28AWG/1PR AND
 24AWG/2C 80°C 30V VW-1

PIN ASSIGNMENT:

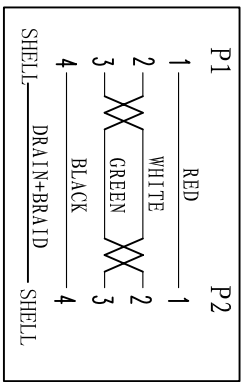

Electrical test:

- 1. 100% short, open, miswire test
- 2. Conduct resistance: 5 Ohm(max)
- 3. Insulation resistance: 5Mohm(min)
- 4. dielectric test: DC 300V

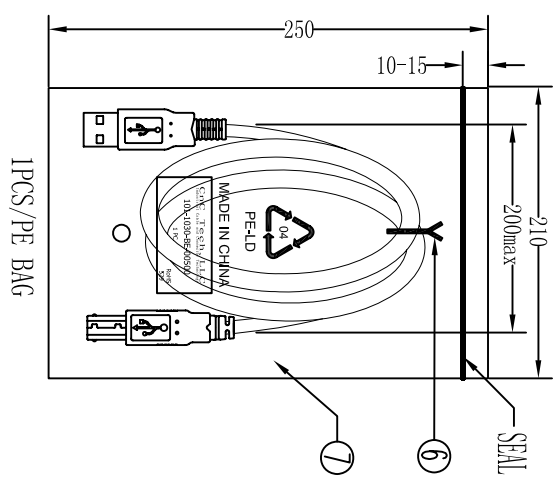

1PCS/PE BAG

| | | | |
|-----|------------|------|---|
| ⑧ | PE BAG | 1/5 | CLEAR SIZE: 330*380*40.05mm PRINT BLACK "MADE IN CHINA" + "5PCS" |
| ⑦ | PE BAG | 1 | CLEAR SIZE: 210*250*40.05mm PRINT BLACK "MADE IN CHINA" + "1PC" |
| ⑥ | TIE | 1 | WHITE L=150mm |
| ⑤ | OUT JACKET | 6g | BEIGE (1V-29#) PVC-40P (MOULD NO: WM-65) |
| ④ | OUT JACKET | 6g | BEIGE (1V-29#) PVC-40P (MOULD NO: WM-40) |
| ③ | CABLE | 1 | BEIGE (1V-29#) USB1. 1 UL2725 28#/1P+24#/2C+AEB OD: 4.7mm L=5000 ± 20mm |
| ② | CONN | 1set | USB B MALE SHELL: NICKEL PIN G/F 3PCS TYPE INSULATOR COLOR: WHITE |
| ① | CONN | 1set | USB A MALE SHELL: NICKEL PIN G/F 3PCS TYPE INSULATOR COLOR: WHITE |
| NO. | NAME | QTY | SPECIFICATION |

| | | | |
|---|---------|------------|-------------------|
| CNC Tech, LLC | | | |
| Industrial Cable and Connector Technology | | | |
| DRAWN | ZHONGHS | DRAWING NO | |
| CHECKED | | CUSTOMER | |
| APPROVAL | | ITEM NO. | 101-1030-BE-00500 |
| DECIDED | | DATE | 2012-02-15 |
| VERSIONS/EDITION | A/0 | PROJECTION | |

4 3 2 1