

PART NAME NON-METALLIC ENCLOSURE (STYLE B)

PART No. NBB-10241 & NBB-10261 & NBB-22241

REV. DATE 10-28-14

ALL ENCLOSURES MEET NEMA TYPE 1, 2, 4, 4X, 12 & 13 AND IEC529-IP65

SUPPLIED WITH (4) SMALL WALL MOUNTING BRKTS. (REF. NBX-10920) & (4) M5x0.8 x 12mm LG. TRUSS HD. SELF-TAPPING SCREWS (NOT SHOWN)

INTERNAL HINGED PANEL MOUNTING BRACKETS, STAINLESS STEEL LOCKING HASP, AIR AND MOISTURE VENTS AND GALVANIZED STEEL INTERNAL PANEL ARE NOT INCLUDED, BUT CAN BE PURCHASED SEPARATELY.

**MATERIAL:**





UL508-4X INDOOR VERSION

SOLID BODY & COVER \_\_\_\_\_ LIGHT GRAY ABS/PC BLENDED PLASTIC  
 UL94-5VB FLAMMABILITY RATING  
 CLEAR COVER \_\_\_\_\_ POLYCARBONATE PLASTIC  
 UL94V-0 FLAMMABILITY RATING  
 UV STABILIZED

ABS VERSION

SOLID BODY & COVER \_\_\_\_\_ LIGHT GRAY ABS  
 UL94-HB FLAMMABILITY RATING

LATCHES & HINGES \_\_\_\_\_ NON-METALLIC  
 WALL MOUNTING BRACKETS \_\_\_\_\_ STAINLESS STEEL  
 COVER INCLUDES GRAY POLYURETHANE GASKET.

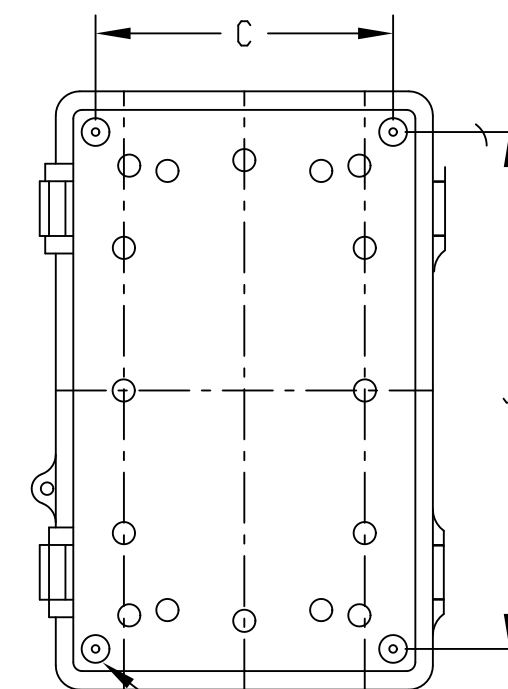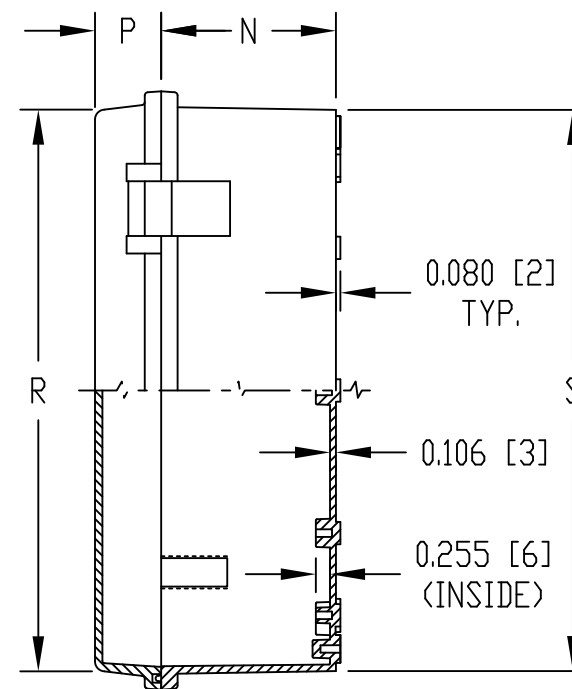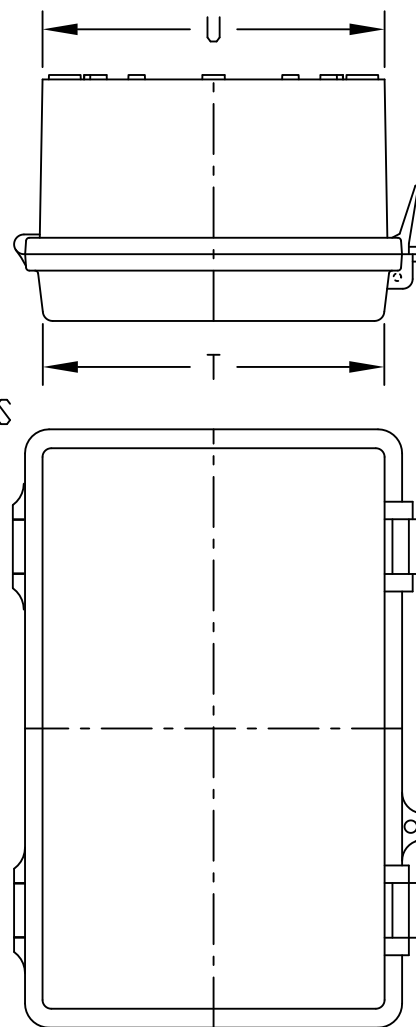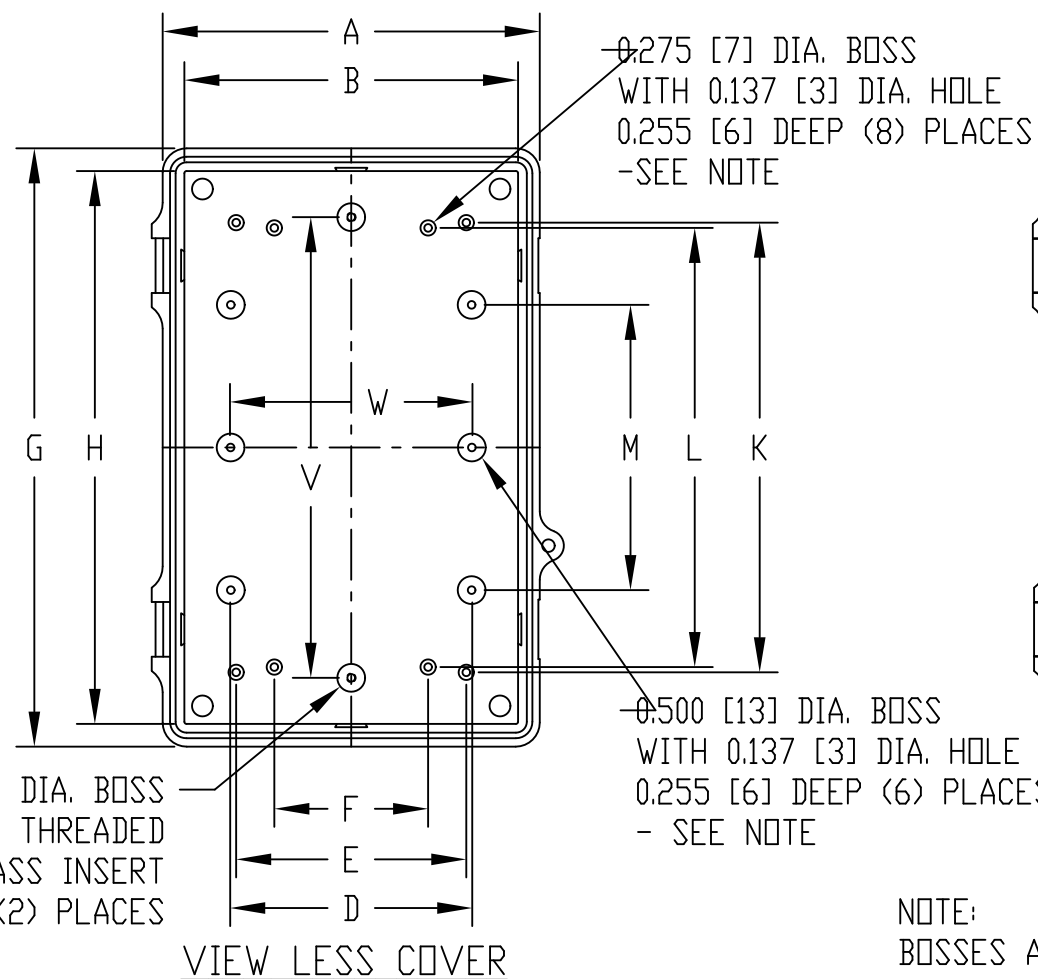

NOTE: BOSSES ACCEPT M4 METRIC OR #8 STD. SHEET METAL SCREWS x 0.250 [6] LG. (NOT SUPPLIED)

DIMENSIONS = INCHES [MILLIMETERS]

NOTE: ALL DIMENSIONS HAVE ±0.039 [±1] TOLERANCE UNLESS OTHERWISE SPECIFIED

UL508-4X INDOOR VERSION		ABS VERSION	DIMENSIONS																			
PART NO.		PART NO.																				
SOLID COVER	CLEAR COVER	SOLID COVER	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	U	V	W
NBB-10241	NBB-10261	NBB-22241	6.780 [172]	6.000 [152]	5.350 [136]	4.352 [111]	4.138 [105]	2.765 [70]	10.750 [273]	9.940 [252]	9.294 [236]	8.085 [205]	7.896 [201]	5.129 [130]	3.142 [80]	1.190 [30]	10.100 [257]	10.090 [256]	6.140 [156]	6.150 [156]	8.283 [210]	4.330 [110]