




8 AWG TERMINAL  
(SEE NOTE 8)

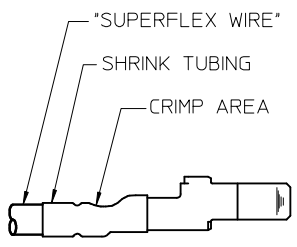

8 AWG TERMINAL  
(SEE NOTE 11)

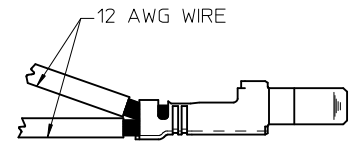

8 AWG TERMINAL  
12 AWG DOUBLE CRIMP  
(SEE NOTE 13)

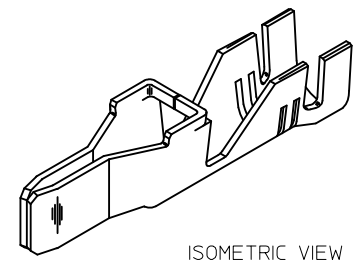

ISOMETRIC VIEW  
(SCALE 4:1)

TRANSFER TO INDIA EC NO: UCP2018-0347 DRWN: JSCHAFER 2017/08/28 CHKD: J APPR: FSMITH 2017/09/21 REVISIONS:	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽=0	mm	INCH	IN/MM	8:1	METRIC	☐
	▽=0	4 PLACES ± --- ± ---	3 PLACES ± --- ± .010	DRAWN BY DATE	RJF 1/7/92	TITLE	MALE CRIMP TERMINAL, 12, 10 & 8AWG MINIFIT SR. <b>molex</b>
	▽=0	2 PLACES ± 0.25 ± .016	1 PLACE ± 0.40 ± ---	CHECKED BY DATE	RJF 1/7/92	DOCUMENT NO.	
▽=0	0 PLACE ± --- ± ---	ANGULAR ±1/2°		APPROVED BY DATE	RAS 1/7/92	SHEET NO.	1 OF 2
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		SEE CHART		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	

13	12	11	10	9	8	7	6	5	4	3	2	1
ITEM NUMBER	WIRE RANGE	DIM. A	DIM. B	DIM. C	DIM. D	DIM. E	DIM. F	DIM. G	MAX. INSULATION DIAMETER	PLATING	STATUS	
J 42817-0011	12 & 10 AWG (5 & 6mm <sup>2</sup> )	.213±.024 (5.40±.60)	.240±.016 (6.10±.40)	R <sub>v</sub> .067 (1.70)	.232±.024 (5.90±.60)	.260±.016 (6.60±.40)	R <sub>v</sub> .087 (2.20)	1.087 (27.60)	.209 DIA. (5.30)	OVERALL TIN	PLANNED FOR OBSOLESCENCE	J
42817-0031	8 AWG	.229±.024 (5.83±.60)	.292±.016 (7.42±.40)	R <sub>v</sub> .067 (1.70)	.236±.024 (6.00±.60)	.216±.016 (5.50±.40)	R <sub>v</sub> .087 (2.20)	1.087 (27.60)	.260 DIA. (6.60)			I
I 42817-0111	12 & 10 AWG (5 & 6mm <sup>2</sup> )	.213±.024 (5.40±.60)	.240±.016 (6.10±.40)	R <sub>v</sub> .067 (1.70)	.232±.024 (5.90±.60)	.260±.016 (6.60±.40)	R <sub>v</sub> .087 (2.20)	1.165 (29.60)	.209 DIA. (5.30)			H
42817-0131	8 AWG	.229±.024 (5.83±.60)	.292±.016 (7.42±.40)	R <sub>v</sub> .067 (1.70)	.236±.024 (6.00±.60)	.216±.016 (5.50±.40)	R <sub>v</sub> .087 (2.20)	1.165 (29.60)	.260 DIA. (6.60)			G
H 42817-0012	12 & 10 AWG (5 & 6mm <sup>2</sup> )	.213±.024 (5.40±.60)	.240±.016 (6.10±.40)	R <sub>v</sub> .067 (1.70)	.232±.024 (5.90±.60)	.260±.016 (6.60±.40)	R <sub>v</sub> .087 (2.20)	1.087 (27.60)	.209 DIA. (5.30)	SELECT GOLD	ACTIVE	H
42817-0032	8 AWG	.229±.024 (5.83±.60)	.292±.016 (7.42±.40)	R <sub>v</sub> .067 (1.70)	.236±.024 (6.00±.60)	.216±.016 (5.50±.40)	R <sub>v</sub> .087 (2.20)	1.087 (27.60)	.260 DIA. (6.60)			F
I 42817-0112	12 & 10 AWG (5 & 6mm <sup>2</sup> )	.213±.024 (5.40±.60)	.240±.016 (6.10±.40)	R <sub>v</sub> .067 (1.70)	.232±.024 (5.90±.60)	.260±.016 (6.60±.40)	R <sub>v</sub> .087 (2.20)	1.165 (29.60)	.209 DIA. (5.30)			E
G 42817-0132	8 AWG	.229±.024 (5.83±.60)	.292±.016 (7.42±.40)	R <sub>v</sub> .067 (1.70)	.236±.024 (6.00±.60)	.216±.016 (5.50±.40)	R <sub>v</sub> .087 (2.20)	1.165 (29.60)	.260 DIA. (6.60)	SELECT SILVER	ACTIVE	G
I 42817-1014	12 & 10 AWG (5 & 6mm <sup>2</sup> )	.213±.024 (5.40±.60)	.240±.016 (6.10±.40)	R <sub>v</sub> .067 (1.70)	.232±.024 (5.90±.60)	.260±.016 (6.60±.40)	R <sub>v</sub> .087 (2.20)	1.087 (27.60)	.209 DIA. (5.30)			D
42817-1034	8 AWG	.229±.024 (5.83±.60)	.292±.016 (7.42±.40)	R <sub>v</sub> .067 (1.70)	.236±.024 (6.00±.60)	.216±.016 (5.50±.40)	R <sub>v</sub> .087 (2.20)	1.087 (27.60)	.260 DIA. (6.60)			C
F 42817-1114	12 & 10 AWG (5 & 6mm <sup>2</sup> )	.213±.024 (5.40±.60)	.240±.016 (6.10±.40)	R <sub>v</sub> .067 (1.70)	.232±.024 (5.90±.60)	.260±.016 (6.60±.40)	R <sub>v</sub> .087 (2.20)	1.165 (29.60)	.209 DIA. (5.30)			B
42817-1134	8 AWG	.229±.024 (5.83±.60)	.292±.016 (7.42±.40)	R <sub>v</sub> .067 (1.70)	.236±.024 (6.00±.60)	.216±.016 (5.50±.40)	R <sub>v</sub> .087 (2.20)	1.165 (29.60)	.260 DIA. (6.60)	A		

NOTES:

1) MATERIAL: COPPER ALLOY 151, .020/(.50) THICK.

2) PLATING:

1= .000100/(.00254) MIN.TIN OVER

.000050/(.00127) MIN.NICKEL.

2= .000030/(.00076) MIN. SELECT GOLD IN CONTACT AREA.

.000100/(.00254) MIN. SELECT TIN ON SOLDER TAILS

OVER .000050/(.00127) MIN. NICKEL.

4= .000100/(.00254) MINIMUM SELECT SILVER IN CONTACT AREA.

.000100/(.00254) MIN. SELECT TIN ON SOLDER TAILS

OVER .000050/(.00127) MIN. NICKEL.

3) PRODUCT SPEC: PS-42815-001.

4) PACKAGING INFORMATION: PK-42815-001.

5) PART IS DESIGNED IN METRIC.

6) TERMINALS FOR USE WITH STRANDED WIRE ONLY.

7) ITEM NUMBERS PRECEDED BY AN "X" IN THE CHART ARE NOT AVAILABLE.

8) THE 8 AWG TERMINAL HAS NO INSULATION CRIMP.THE SECONDARY

CRIMP SECTION ACTS AS A STRAIN RELIEF ON THE BARE CONDUCTOR ONLY.

SEE MOLEX CRIMP SPECIFICATION FOR DETAILS.

⑨ AFTER CRIMPING, THIS DIMENSION IS .140/(3.55) MINIMUM.

⑩ AFTER CRIMPING, THIS DIMENSION IS .089/(2.25) MINIMUM.

11) WHEN USING THE 8 AWG TERMINAL WITH "HI-FLEX" WIRE, MOLEX STRONGLY RECOMMENDS THAT THE APPROPRIATELY RATED HEAT SHRINK INSULATION BE APPLIED OVER THE WIRE INSULATION AND CRIMP AREA, AS SHOWN, TO MINIMIZE WIRE INSULATION CREEPAGE OUTSIDE OF HOUSING.

12) WHEN USING OVERALL TIN PLATED TERMINALS.

FOR APPLICATIONS INVOLVING VIBRATION AND/OR THERMAL CYCLING.

MOLEX STRONGLY RECOMMENDS THE USE OF NYE LUBRICANT.NYOGEL 760G.

ON THE MATING AREA OF THE TERMINAL. LUBRICANT SHOULD BE APPLIED

AFTER THE TERMINALS ARE INSERTED INTO THE HOUSING.

REFER AS-42815-001 FOR ADDITIONAL INFORMATION.

13) THE 8 AWG TERMINAL WILL ALSO ACCOMODATE 2 12 AWG WIRES

SEE CRIMP SPEC FOR DETAILS.

SEE SHEET 1 EC NO: UCP2018-0347 DRWN: SCHAEFER 2017/08/28 CHKD: APPR: FSMITH 2017/09/21 REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽=0	m/m INCH	IN/MM	8:1	METRIC	
	▽=0	4 PLACES ± --- ± ---	DRAWN BY DATE	MALE CRIMP TERMINAL, 12, 10 & 8AWG MINIFIT SR. <b>molex</b>		
	▽=0	3 PLACES ± --- ± .010	RJF 1/7/92			
	2 PLACES ± 0.25 ± .016	CHECKED BY DATE	SD-42817-* SHEET NO. 2 OF 2			
	1 PLACE ± 0.40 ± ---	RJF 1/7/92				
	0 PLACE ± --- ± ---	APPROVED BY DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		RAS 1/7/92				
		MATERIAL NO.	DOCUMENT NO.			
		ANGULAR ±1/2°	SEE CHART			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				