

## Surge protection SPD II 1 280V/50KA

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com



Surge protection for use in low-voltage supplies. The SPD II series is tested according to UL 1449 ed. 3 (file E354261) as type 4 for use in type 2 applications. These arresters are used in mains voltages up to 277 V L-PEN, installed according to the mains system specifications and are able to discharge a rated current of up to 50 kA (8/20  $\mu$ s) per path. The SPD II has a compact and modular structure and a standard module width of 17.8 mm; it allows rapid and simple exchange of the arrester. This spare arrester allows re-activation of the SPD II 277 V protection after failure.

### General ordering data

Order No.	<a href="#">1348380000</a>
Type	SPD II 1 280V/50KA
Version	Surge protection, Low voltage, without telecomm. contact
GTIN (EAN)	4050118152760
Qty.	1 pc(s).

## Surge protection SPD II 1 280V/50KA

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Technical data

### Dimensions and weights

Width	18 mm	Height	90 mm
Depth	73.5 mm	Net weight	140 g

### Temperatures

Operating temperature	-40 °C...+70 °C	Storage temperature	-40 °C...+85 °C
-----------------------	-----------------	---------------------	-----------------

### General data

Colour	Light Grey	Design	Installation housing; 1TE
Height with TS 35	74 mm	Lightning arrester	No
Mounting rail	TS 35, TS 35 x 15, TS 35 x 7.5	Optical function display	green = OK; red = arrester is defective - replace
Protection degree	IP 20	UL 94 flammability rating	V-0

### Insulation coordination acc. to EN 50178

Pollution severity	2	Surge voltage category	III
--------------------	---	------------------------	-----

### technical data

Rated voltage (AC)	230 V	Highest continuous voltage (AC)	277 V
Short-circuit current rating $I_{SCCR}$	200 kA	Total discharge current $I_{total}$	50 kA
Discharge current, max. (8/20 $\mu$ s)	50 kA	Protection level $U_p$ (typ.)	$\leq 1600$ V
Colour	Light Grey	AC/DC/UC	AC
Response time	$\leq 100$ ns		

### Connection data

Clamping range, rated connection	25 mm <sup>2</sup>	Clamping range, rated connection, min.	4 mm <sup>2</sup>
Clamping range, rated connection, max.	35 mm <sup>2</sup>	Wire connection cross section, stranded, rated connection, min.	2.5 mm <sup>2</sup>
Wire connection cross section, stranded, rated connection, max.	25 mm <sup>2</sup>	Tightening torque, min.	2.5 Nm
Tightening torque, max.	3.5 Nm	Stripping length, rated connection	15 mm

### Rated data UL

Category	Typ 2	$I_{max}$	50 kA
$I_n$	20 kA	MCOV	277 Vac
SCCR	200 kA	Test Voltage 39.1 (UL 1449)	480 V
UL certificate	E-File 354261 Type 2 by UL1449 Ed.3	VPR	1.6 kV

### Classifications

ETIM 3.0	EC000941	UNSPSC	30-21-19-21
eClass 5.1	27-13-08-01	eClass 6.2	27-13-08-02
eClass 7.1	27-14-02-01		

**Data sheet...****Surge protection  
SPD II 1 280V/50KA****Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com**Technical data****Approvals**

Approvals



ROHS

Conform

**Downloads**

Declaration of Conformity

[K481\\_05\\_12.pdf](#)

EPLAN


[1348380000.ema](#)

**Surge protection  
SPD II 1 280V/50KA**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Drawings**

**Electric symbol**

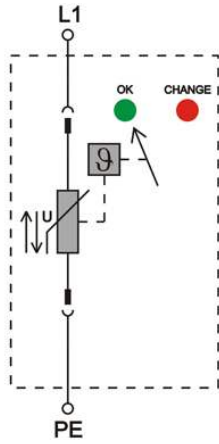

Circuit diagram