
Mounting Option

.344 (8.74) Offset Card Guides

Contact Detail

PC Tail .046x.013(1.17x0.33) - Tail LG=.213(5.41)

.156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

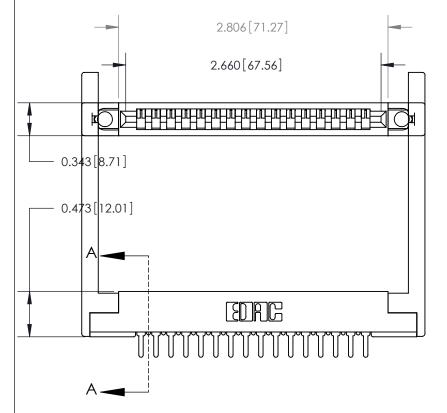

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MAS



ISSUE NUMBER

ORIGINAL

807 Series High Temp Card Edge Connector
Part Number: 807-016-525-168

EDAC INC
TORONTO, ONTARIO
C ANADA
YOUR CONNECTION TO QUALITY & SERVICE WITHOUT W

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIEL OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

.175 [4.45] Point of Contact (Measured from bottom of Card Slot)

	DRAWN: J.LEE	DATE: AUG. 11/09			
	CHECKED:	DATE:			
	SCALE: NTS	SHEET	1 OF 4		
)	DRAWING NUMBER		ISSUE		
	807 Assembly		1		

SECTION A-A

807 ENG MASTER

See Accompanying Pages for:

- Contact Bend Details
- Mounting Options
- Features and Specifications





ISSUE NUMBE

ORIGINAL



Features

- CSA Approved and UL Recognized
- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- Low Profile Insulator Body .473 (12.01), with Card Guides
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree & Extender Board Bends
- Single or Dual Row Configurations
- Large Variety of Mounting Options
- Pre-assembled Card Guides Available
- Accepts Between Contact and In-Contact Polarizing Keys

Specifications

- Insulator Material: DAP
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 5 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +165 °C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

807 Series High Temp Card Edge Connector Features and Specifications		ACAD REFERENCE NO. 807 ENG MASTER			
		DRAWN:	J.LEE	DATE: AU	G. 11/09
		CHECKED:		DATE:	
TORONTO, ONTARIO ARE THE PROPERTY OF EDAC INC.A SHALL NOT BE REPRODUCED, OR COI OR USED AS THE BASIS FOR THE	THESE DRAWINGS AND SPECIFICATIONS	SCALE:	NTS	SHEET .	4 OF 4
	SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	DRAWING	NUMBER		ISSUE
		8	07 Assembly		1