

REV. B
DCO 300860


TOLERANCES $\pm .010$ " - UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C
RESISTANCE _____ 320 OHMS $\pm 10\%$
NOMINAL VOLTAGE _____ 28 VDC
MUST OPERATE _____ 13.5 VDC MAX.
COIL TRANSIENT SUPPRESSION: 42 VDC MAX.
MUST RELEASE _____ 5.5 VDC MAX., 2.3 VDC MIN.

ENVIRONMENT:
VIBRATION _____ 10 Hz TO _____ 3000 Hz @ _____ 30 g's
SHOCK _____ 200 g's _____ 6 MS. DURATION
TEMPERATURE _____ -70 °C TO _____ +125 °C

NOTES: OPERATE, RELEASE 10 MS MAX.
CONTACT BOUNCE 1 MS MAX.
CONTACT BREAK BOUNCE 0.1 MS MAX.

CUSTOMER DATA SHEET

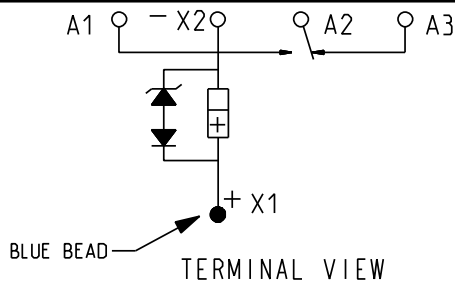

CONTACT RATING: _____
25 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE
50,000 OPERATIONS

DR. B.D. 21MAY2008 CK. J.M.B. 5/21/08

Tyco Electronics ©COPYRIGHT 2005
TYCO ELECTRONICS CORPORATION
ALL INTERNATIONAL RIGHTS RESERVED

CUST. _____ QPL
CUST. NO. _____ M6106/19-016 REV. ----

TE NUMBER
2-1617748-2

CII PART NUMBER
FCA-125-16