

**ENERGIZER E96**


**AAAA**



**Specifications**


<b>Classification:</b>	Alkaline
<b>Chemical System:</b>	Zinc-Manganese Dioxide (Zn/MnO <sub>2</sub> ) No added mercury or cadmium
<b>Designation:</b>	ANSI-25A, IEC-LR8D425, LR61
<b>Nominal Voltage:</b>	1.5 volts
<b>Nominal IR:</b>	200 to 350 milliohms (fresh)
<b>Operating Temp:</b>	-18°C to 55°C (0°F to 130°F)
<b>Typical Weight:</b>	6.5 grams (0.2 oz.)
<b>Typical Volume:</b>	2.2 cubic centimeters (0.1 cubic inch)
<b>Jacket:</b>	Plastic Label
<b>Shelf Life:</b>	5 years at 21°C
<b>Terminal:</b>	Flat Contact

**Industry Standard Dimensions**

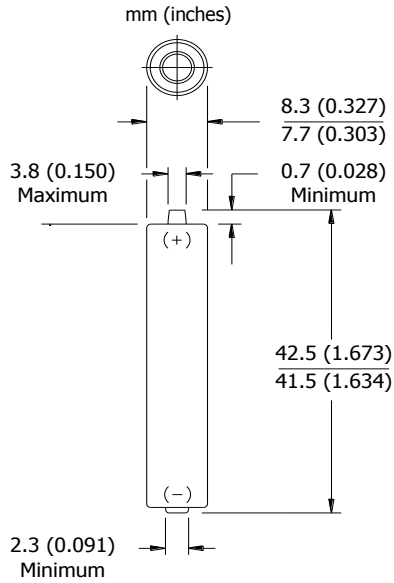


**Milliamp-Hours Capacity**

Continuous discharge to 0.8 volts at 21°C

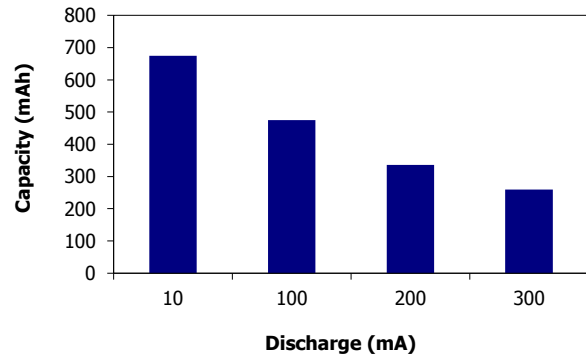


**Industry Standard Tests (21°C)**

**LIGHTING**  
5.1 ohm LIF

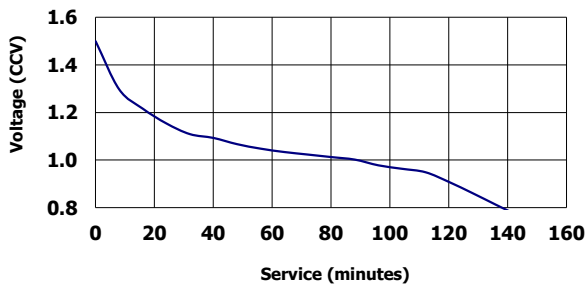

**LASER POINTER**  
75 ohm 1 hr/day

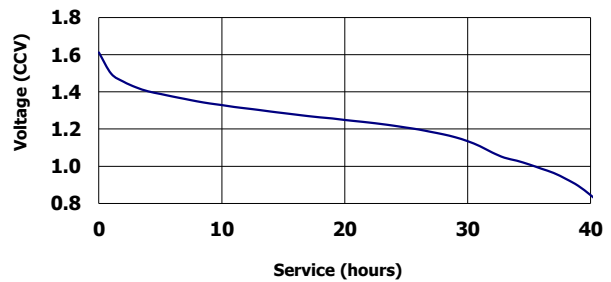

**Important Notice**

This datasheet contains typical information specific to products manufactured at the time of its publication.  
**Contents herein do not constitute a warranty and are for reference only.**