

date 08/05/2022

page 1 of 4

MODEL: CPS-8542-110PM | DESCRIPTION: SIREN

FEATURES

- warble tone
- internally driven
- panel mount





SPECIFICATIONS


| parameter | conditions/description | min | typ | max | units |
|-----------------------|----------------------------------|-------|------|-------|-------|
| rated voltage | with reverse polarity protection | | 24 | | Vdc |
| operating voltage | with reverse polarity protection | 12 | | 25 | Vdc |
| current consumption | at rated voltage | | 180 | 250 | mA |
| rated frequency | | 1,500 | | 3,500 | Hz |
| sound pressure level | at 1 m, rated voltage | 105 | 110 | 115 | dB |
| tone | warble | | | | |
| dimensions | Ø85 x 42 | | | | mm |
| weight | | | 59.0 | | g |
| material | ABS (UL94HB) | | | | |
| terminal | wire leads | | | | |
| operating temperature | | -20 | | 70 | °C |
| storage temperature | | -30 | | 80 | °C |
| washable | no | | | | |
| RoHS | yes | | | | |

Notes: 1. All specifications measured at 25±3°C, humidity at 60~70%, under 86~106 kPa pressure, unless otherwise noted.

MECHANICAL DRAWING

units: mm tolerance: ±3 mm


wire: UL 1007 24 AWG

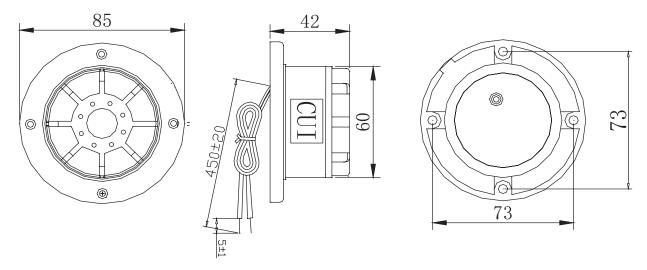

PACKAGING

units: mm

Carton Size: 450 x 250 x 365 mm Carton QTY: 100 pcs per carton

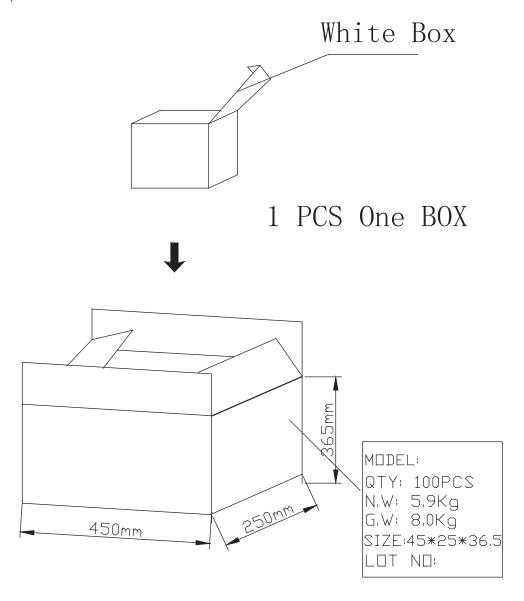

REVISION HISTORY

| rev. | description | date | |
|------|------------------------------|------------|--|
| 1.0 | initial release | 01/22/2020 | |
| 1.01 | logo, datasheet style update | 08/05/2022 | |

The revision history provided is for informational purposes only and is believed to be accurate.



CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.