

## 20A, 35V - 200V Schottky Barrier Rectifier

### FEATURES

- AEC-Q101 qualified available
- Low power loss, high efficiency
- Guard ring for overvoltage protection
- High surge current capability
- RoHS Compliant
- Halogen-free according to IEC 61249-2-21



### APPLICATIONS

- Switching mode power supply (SMPS)
- Adapters
- DC to DC converters

### MECHANICAL DATA

- Case: TO-220AB
- Molding compound meets UL 94V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Mounting torque: 0.56 N·m maximum
- Meet JESD 201 class 2 whisker test
- Polarity: As marked
- Weight: 1.88g (approximately)

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
$I_F$	20	A
$V_{RRM}$	35 - 200	V
$I_{FSM}$	150	A
$T_{JMAX}$	150	°C
Package	TO-220AB	
Configuration	Dual dies	

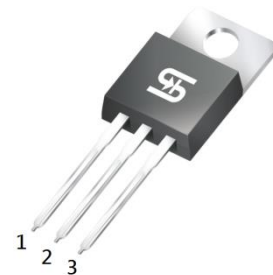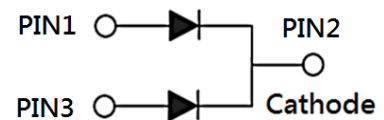
**TO-220AB**


ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)										
PARAMETER	SYMBOL	MBR 2035 CT	MBR 2045 CT	MBR 2050 CT	MBR 2060 CT	MBR 2090 CT	MBR 20100 CT	MBR 20150 CT	MBR 20200 CT	UNIT
Marking code on the device		MBR 2035 CT	MBR 2045 CT	MBR 2050 CT	MBR 2060 CT	MBR 2090 CT	MBR 20100 CT	MBR 20150 CT	MBR 20200 CT	
Repetitive peak reverse voltage	$V_{RRM}$	35	45	50	60	90	100	150	200	V
Reverse voltage, total rms value	$V_{R(RMS)}$	24	31	35	42	63	70	105	140	V
Forward current	$I_F$	20								A
Surge peak forward current, 8.3ms single half sine wave superimposed on rated load	$I_{FSM}$	150								A
Peak repetitive reverse surge current <sup>(1)</sup>	$I_{RRM}$	1		0.5						A
Peak repetitive forward current (Rated $V_R$ , Square wave, 20KHz)	$I_{FRM}$	20								A

ABSOLUTE MAXIMUM RATINGS (T <sub>A</sub> = 25°C unless otherwise noted)										
PARAMETER	SYMBOL	MBR 2035 CT	MBR 2045 CT	MBR 2050 CT	MBR 2060 CT	MBR 2090 CT	MBR 20100 CT	MBR 20150 CT	MBR 20200 CT	UNIT
Critical rate of rise of off-state voltage	dv/dt	10,000								V/μs
Junction temperature	T <sub>J</sub>	-55 to +150								°C
Storage temperature	T <sub>STG</sub>	-55 to +150								°C

**Notes:**

- tp = 2.0μs, 1.0KHz

THERMAL PERFORMANCE				
PARAMETER		SYMBOL	TYP	UNIT
Junction-to-case thermal resistance	MBR2035CT MBR2045CT MBR2050CT MBR2060CT	R <sub>θJC</sub>	1	°C/W
Junction-to-case thermal resistance	MBR2090CT MBR20100CT MBR20150CT MBR20200CT	R <sub>θJC</sub>	2	°C/W

ELECTRICAL SPECIFICATIONS (T <sub>A</sub> = 25°C unless otherwise noted)						
PARAMETER		CONDITIONS	SYMBOL	TYP	MAX	UNIT
Forward voltage per diode <sup>(1)</sup>	MBR2035CT MBR2045CT	I <sub>F</sub> = 10A, T <sub>J</sub> = 25°C	V <sub>F</sub>	-	-	V
	MBR2050CT MBR2060CT			-	0.80	V
	MBR2090CT MBR20100CT			-	0.85	V
	MBR20150CT MBR20200CT			-	0.99	V
	MBR2035CT MBR2045CT	I <sub>F</sub> = 20A, T <sub>J</sub> = 25°C		-	0.84	V
	MBR2050CT MBR2060CT MBR2090CT MBR20100CT			-	0.95	V
	MBR20150CT MBR20200CT			-	1.23	V
	MBR2035CT MBR2045CT			I <sub>F</sub> = 10A, T <sub>J</sub> = 125°C	-	0.57
	MBR2050CT MBR2060CT	-			0.70	V
	MBR2090CT MBR20100CT	-			0.75	V
	MBR20150CT MBR20200CT	-			0.87	V
	MBR2035CT MBR2045CT	I <sub>F</sub> = 20A, T <sub>J</sub> = 125°C		-	0.72	V
	MBR2050CT MBR2060CT MBR2090CT MBR20100CT			-	0.85	V
	MBR20150CT MBR20200CT			-	1.10	V

**ELECTRICAL SPECIFICATIONS** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

PARAMETER	CONDITIONS	SYMBOL	TYP	MAX	UNIT
Reverse current @ rated $V_R$ per diode <sup>(2)</sup>	$T_J = 25^\circ\text{C}$	$I_R$	-	100	$\mu\text{A}$
	$T_J = 125^\circ\text{C}$		-	15	mA
			-	10	mA
			-	5	mA
			-	0.15	mA
			-	0.15	mA

**Notes:**

1. Pulse test with  $PW = 0.3\text{ms}$
2. Pulse test with  $PW = 30\text{ms}$

**ORDERING INFORMATION**

ORDERING CODE <sup>(1)(2)</sup>	PACKAGE	PACKING
MBR20xCT	TO-220AB	50 / Tube
MBR20xCTH	TO-220AB	50 / Tube


**Notes:**

1. "x" defines voltage from 35V(MBR2035CT) to 200V(MBR20200CT)
2. "H" means AEC-Q101 qualified


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig.1 Forward Current Derating Curve**

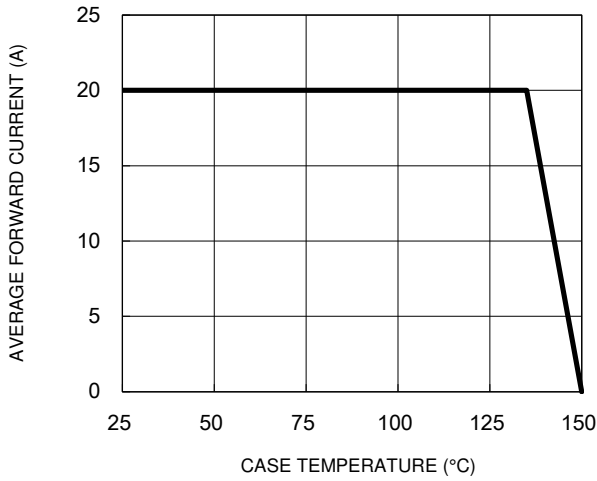


**Fig.2 Typical Junction Capacitance**

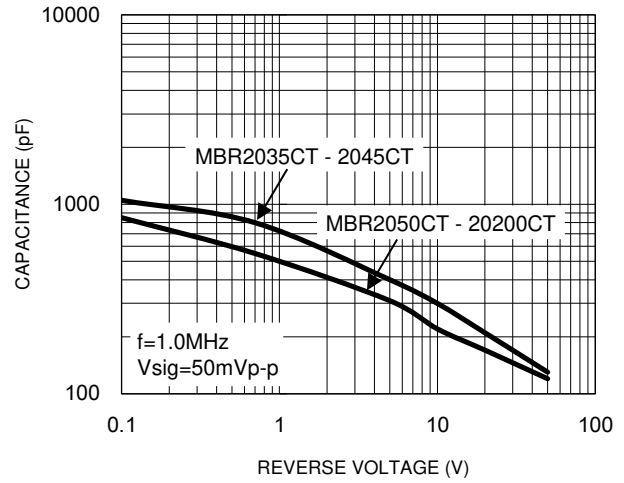


**Fig.3 Typical Reverse Characteristics**

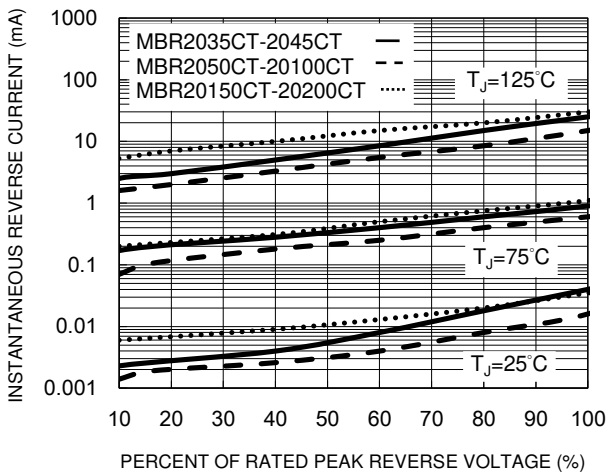

**Fig.4 Typical Forward Characteristics**

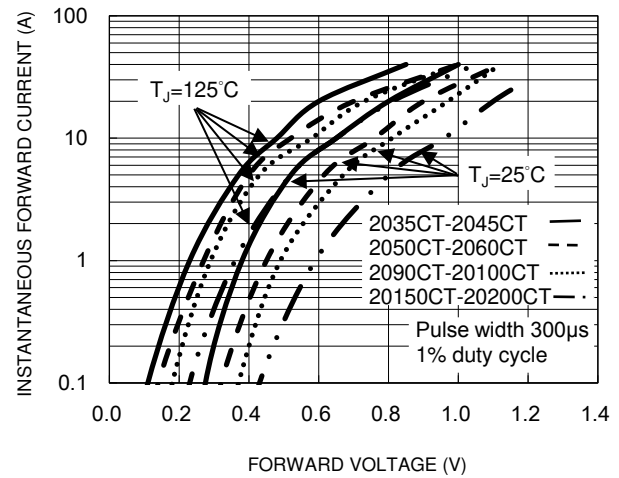


**Fig.5 Maximum Non-Repetitive Forward Surge Current**

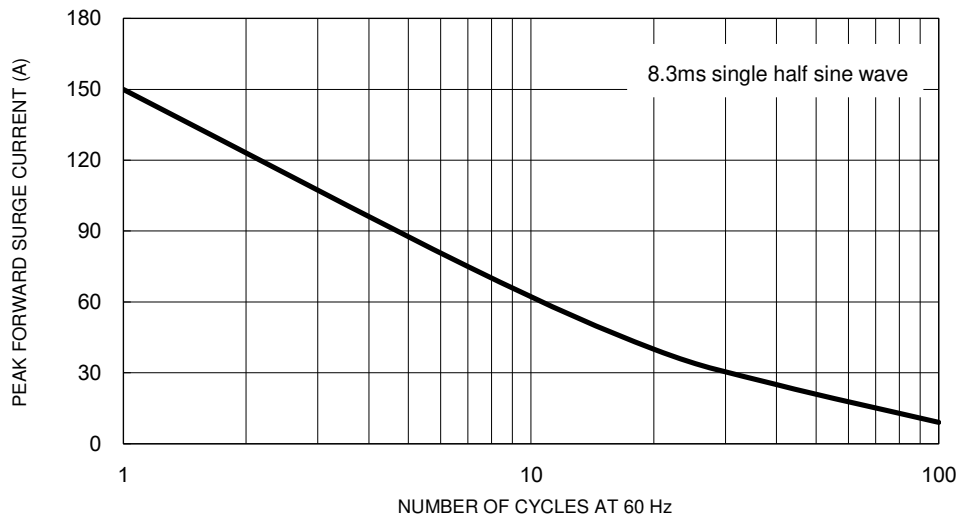


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

**Fig.6 Typical Transient Thermal Impedance**

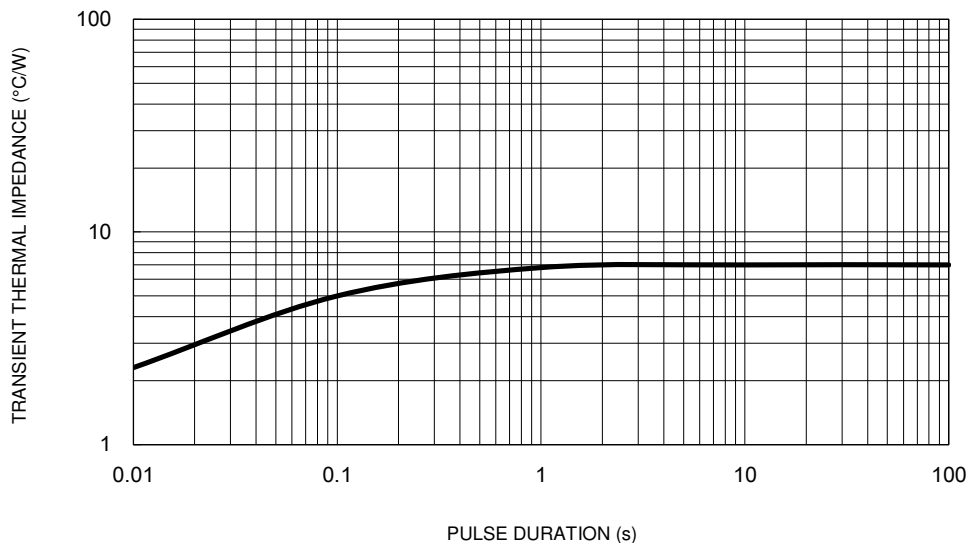

**PACKAGE OUTLINE DIMENSIONS**

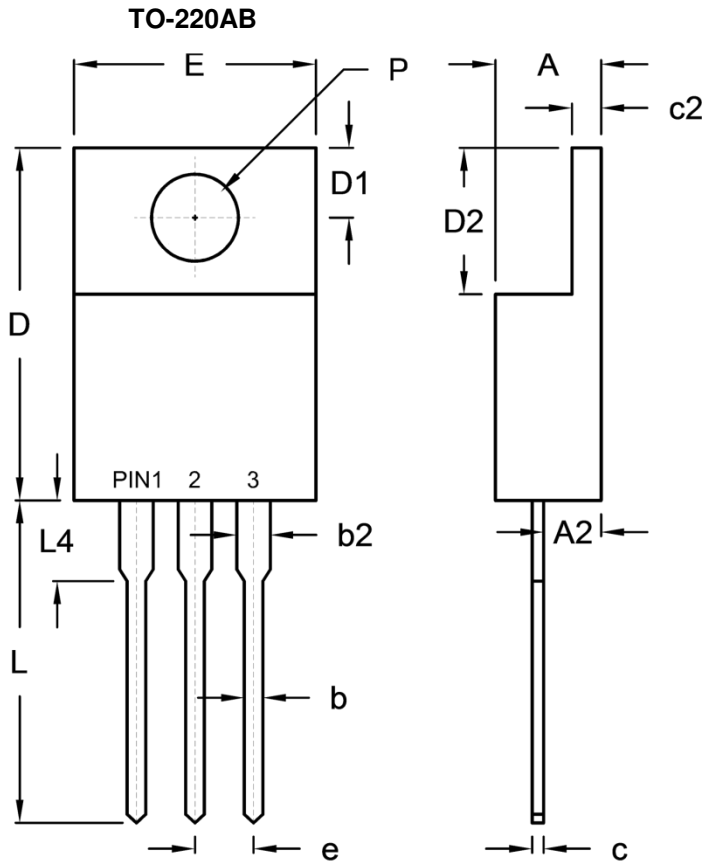

DIM.	Unit (mm)		Unit (inch)	
	Min.	Max.	Min.	Max.
A	4.42	4.76	0.174	0.187
A2	2.20	2.80	0.087	0.110
b	0.68	0.94	0.027	0.037
b2	1.14	1.77	0.045	0.070
c	0.35	0.64	0.014	0.025
c2	1.14	1.40	0.045	0.055
D	14.60	16.00	0.575	0.630
D1	2.62	3.44	0.103	0.135
D2	5.84	6.86	0.230	0.270
E	-	10.50	-	0.413
e	2.41	2.67	0.095	0.105
L	13.19	14.79	0.519	0.582
L4	2.80	4.20	0.110	0.165
P	3.54	4.00	0.139	0.157

**MARKING DIAGRAM**



- P/N = Marking Code
- G = Green Compound
- YWW = Date Code
- F = Factory Code

## **Notice**

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.