

Obsolete

M.C.C.

Micro Commercial Components



Micro Commercial Components  
20736 Marilla Street Chatsworth  
CA 91311  
Phone: (818) 701-4933  
Fax: (818) 701-4939

DL4150

200mA  
Small Signal  
Diodes  
50 Volts

### Features

- For general purpose and switching
- Silicon Epitaxial Planar Diodes
- These diodes are also available in other case styles including: the DO-35 case with the type designations 1N4150, the SOD-123 case with the type designations 1N4150W
- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates Compliant. See ordering information)
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1

### Maximum Ratings @ 25°C Unless Otherwise Specified


Parameter	Symbol	Value	Condition
Working Inverse Voltage	$W_{IV}$	50V	
Maximum Rectified Current (Average)	$I_o$	200mA	
DC Forward Current	$I_F$	400mA	
Recurrent Peak Forward Current	$i_{r}$	600mA	
Peak Forward Surge Current	$i_{f(surge)}$	1.0A 4.0A	Pulse Width=1.0s Pulse Width=1.0 μ s
Storage Temperature Range	$T_{stg}$	-65°C to +200°C	
Operating Junction Temperature	$T_J$	175°C	

### Thermal Characteristics @ 25°C Unless Otherwise Specified

Total Device Dissipation Derate above 25°C	$P_D$	500mW 3.33mW/°C	
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	300°C/W	


Note:1.Lead in Glass Exemption Applied, see EU Directive Annex 5.

### MINIMELF(SOD-80C)

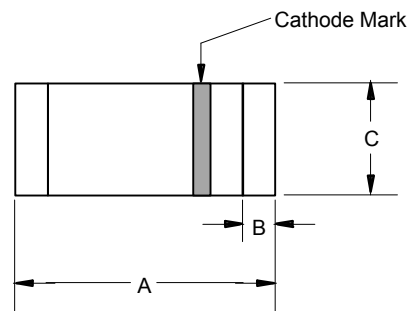

DIM	DIMENSION				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	.130	.146	3.30	3.70	
B	.008	.016	0.20	0.40	
C	.055	.059	1.40	1.50	

### SUGGESTED SOLDER PAD LAYOUT

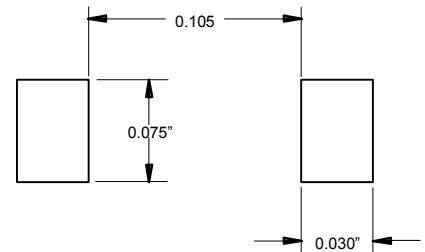

**Electrical Characteristics @ 25°C Unless Otherwise Specified**

Parameter	Symbol	Min	Max	Units	Test Conditions
Breakdown Voltage	$B_V$	75	---	V	$I_R=5.0 \mu A$
Reverse Current	$I_R$	---	100	nA $\mu A$	$V_R=50V$ $V_R=50V, T_A=150^\circ C$
Forward Voltage	$V_F$	540 660 760 820 0.57	620 740 860 920 1.0	mV mV mV mV V	$I_F=1.0mA$ $I_F=10mA$ $I_F=50mA$ $I_F=100mA$ $I_F=200mA$
Diode Capacitance	$C_O$	---	2.5	pF	$V_R=0V, f=1.0MHz$
Reverse Recovery Time	$T_{RR}$	---	4.0 6.0	nS nS	$I_F=I_R=10mA-200mA, R_L=100 \Omega$ $I_F=I_R=200mA-400mA, R_L=100 \Omega$
Forward Recovery Time	$T_{FR}$	---	10	nS	$I_F=200mA, V_{FR}=1.0V$



Micro Commercial Components

Ordering Information :

Device	Packing
Part Number-TP	Tape&Reel: 2.5Kpcs/Reel

**\*\*\*IMPORTANT NOTICE\*\*\***

**Micro Commercial Components Corp.** reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

**\*\*\*LIFE SUPPORT\*\*\***

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

**\*\*\*CUSTOMER AWARENESS\*\*\***

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

[www.mccsemi.com](http://www.mccsemi.com)