
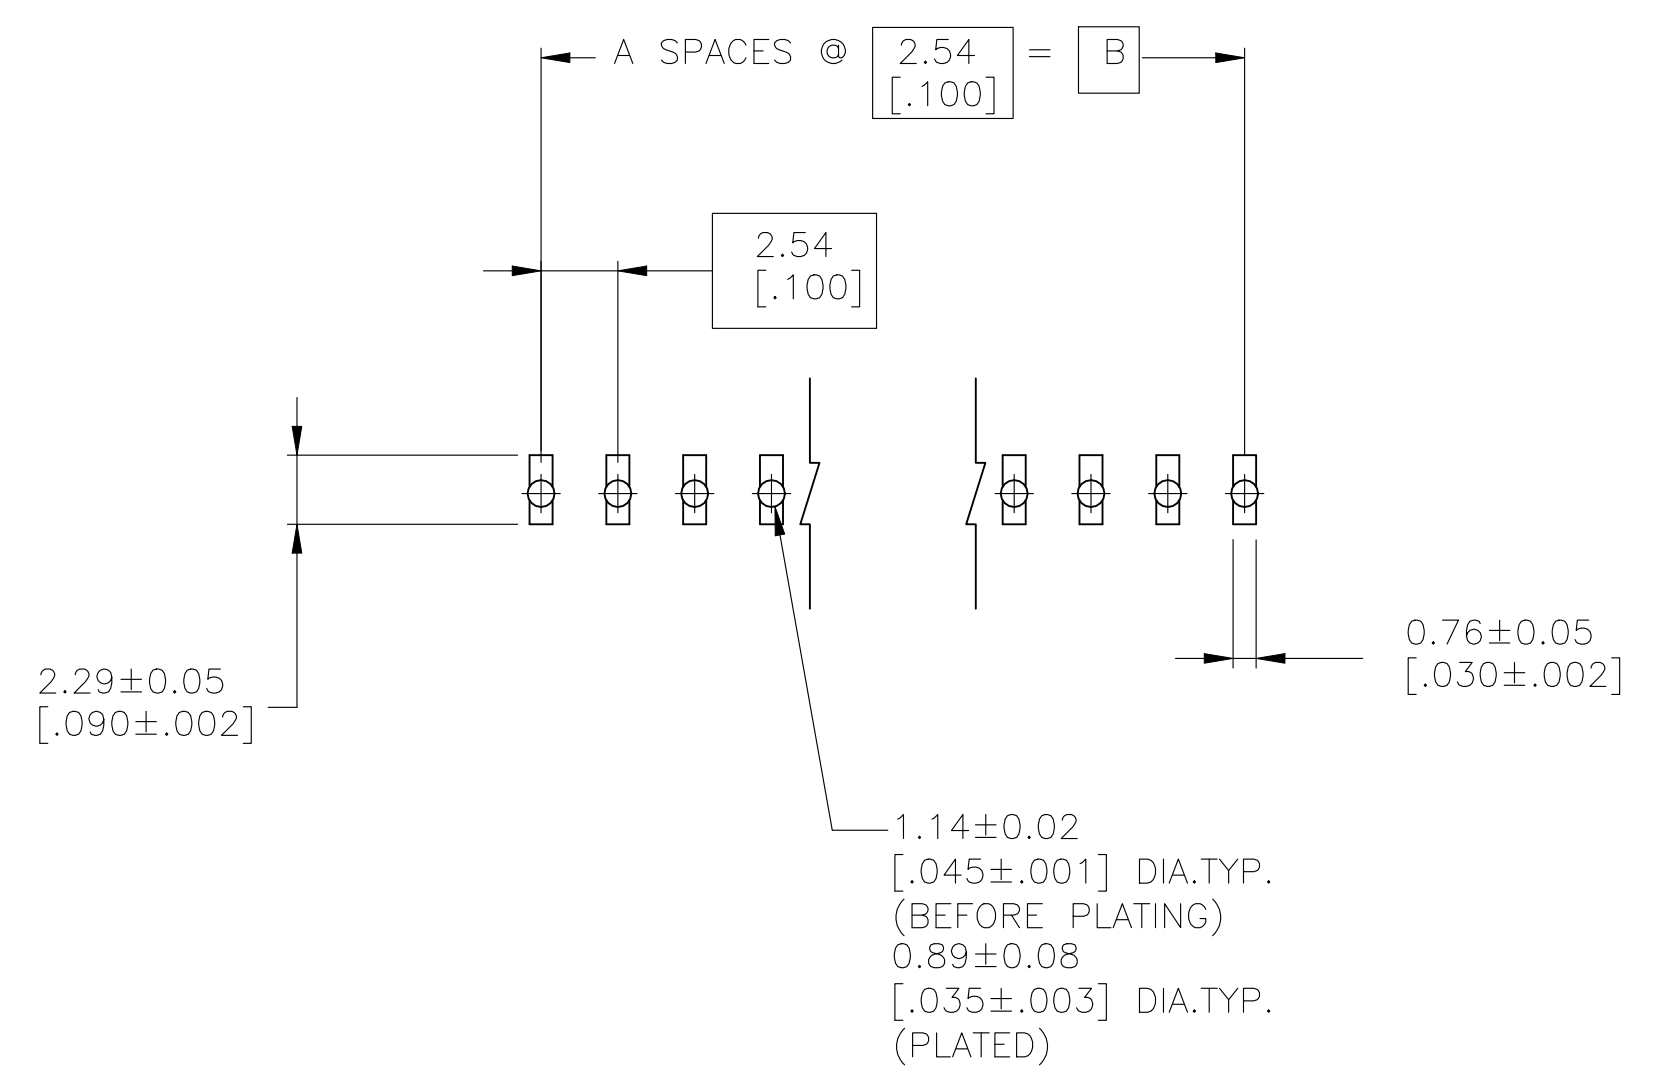


REVISIONS					
REV	DATE	BY	CHK	APPV	DESCRIPTION
C3	15JUN2022	RK	MF		REVISED PER ECN-22-158806

- 1 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
- 2 BREAKAWY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 3 0.000762 [.000030] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
- 4 HOUSING: GLASS FILLED THERMOPLASTIC, COLOR, BLACK. (WILL WITHSTAND VAPOR PHASE REFLOW.) CONTACT: COPPER ALLOY.
- 5 0.000762 [.000030] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

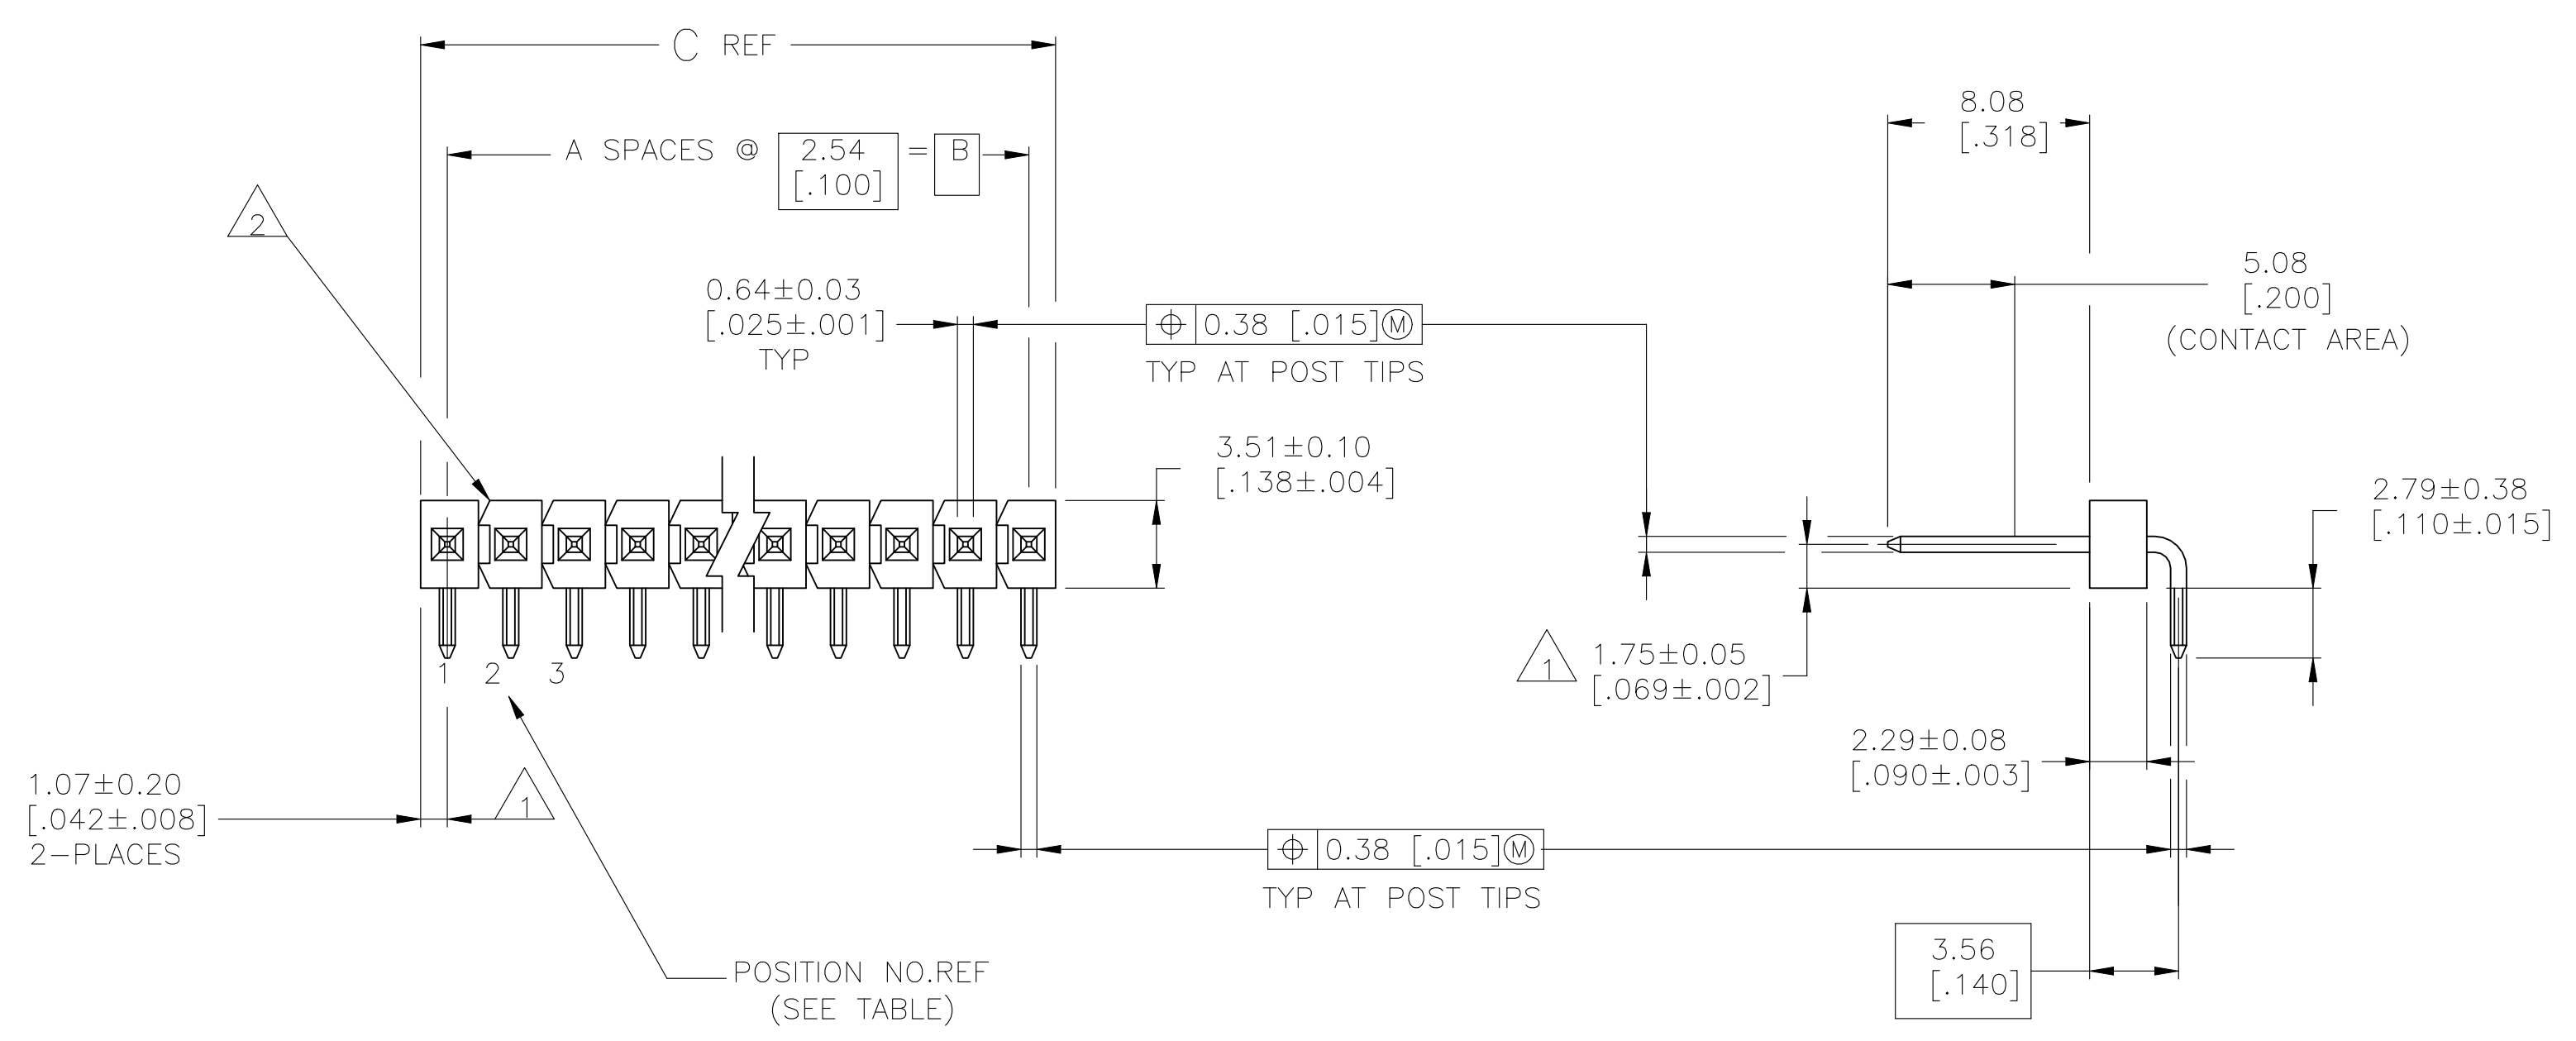

RECOMMENDED PC BOARD MOUNTING DIMENSIONS FOR .063 [1.60] THICK PC BOARD AND .012 [.305] STENCIL THICK.

REV	DATE	BY	CHK	APPV	DESCRIPTION
39	40				4-146305-0
38	39				3-146305-9
37	38				3-146305-8
36	37				3-146305-7
35	36				3-146305-6
34	35				3-146305-5
33	34				3-146305-4
32	33				3-146305-3
31	32				3-146305-2
30	31				3-146305-1
29	30				3-146305-0
28	29				2-146305-9
27	28				2-146305-8
26	27				2-146305-7
25	26				2-146305-6
24	25				2-146305-5
23	24				2-146305-4
22	23				2-146305-3
21	22				2-146305-2
20	21				2-146305-1
19	20				2-146305-0
18	19				1-146305-9
17	18				1-146305-8
16	17				1-146305-7
15	16				1-146305-6
14	15				1-146305-5
13	14				1-146305-4
12	13				1-146305-3
11	12				1-146305-2
10	11				1-146305-1
9	10				1-146305-0
8	9				146305-9
7	8				146305-8
6	7				146305-7
5	6				146305-6
4	5				146305-5
3	4				146305-4
2	3				146305-3
1	2				146305-2
0	1				146305-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	0.127 [0.005]
2 PLC	±	0.254 [0.010]
3 PLC	±	0.508 [0.020]
4 PLC	±	1.27 [0.050]

ANGLES: ± 0.127 [0.005]

MATERIAL: SEE TABLE

FINISH: SEE TABLE

APPROVALS:

DIN	T. HOFFMAN	21JUN95
CHK	G. DUBNICZKI	-
APPV	G. DUBNICZKI	-

PRODUCT SPEC: -

APPLICATION SPEC: -

WEIGHT: -

CUSTOMER DRAWING

SCALE: 4:1

SHEET 1 OF 2

REV C3

TE Connectivity Ltd.

HEADER ASSEMBLY, MOD II, B/A
HIGH TEMP, RA, SINGLE ROW,
W/.025 SQUARE POSTS

DRAWING NO: 00779C=146305

REVISIONS					
REV	DATE	DESCRIPTION	BY	CHK	APPV
-	-	SEE SHEET 1	-	-	-

△5	101.19 [3.984]	99.06 [3.900]	39	40	9-146305-0
△5	98.65 [3.884]	96.52 [3.800]	38	39	8-146305-9
△5	96.11 [3.784]	93.98 [3.700]	37	38	8-146305-8
△5	93.57 [3.684]	91.44 [3.600]	36	37	8-146305-7
△5	91.03 [3.584]	88.90 [3.500]	35	36	8-146305-6
△5	88.49 [3.484]	86.36 [3.400]	34	35	8-146305-5
△5	85.95 [3.384]	83.82 [3.300]	33	34	8-146305-4
△5	83.41 [3.284]	81.28 [3.200]	32	33	8-146305-3
△5	80.87 [3.184]	78.74 [3.100]	31	32	8-146305-2
△5	78.33 [3.084]	76.20 [3.000]	30	31	8-146305-1
△5	75.79 [2.984]	73.66 [2.900]	29	30	8-146305-0
△5	73.25 [2.884]	71.12 [2.800]	28	29	7-146305-9
△5	70.71 [2.784]	68.58 [2.700]	27	28	7-146305-8
△5	68.17 [2.684]	66.04 [2.600]	26	27	7-146305-7
△5	65.63 [2.584]	63.5 [2.500]	25	26	7-146305-6
△5	63.09 [2.484]	60.96 [2.400]	24	25	7-146305-5
△5	60.55 [2.384]	58.42 [2.300]	23	24	7-146305-4
△5	58.01 [2.284]	55.88 [2.200]	22	23	7-146305-3
△5	55.47 [2.184]	53.34 [2.100]	21	22	7-146305-2
△5	52.93 [2.084]	50.80 [2.000]	20	21	7-146305-1
△5	50.39 [1.984]	48.26 [1.900]	19	20	7-146305-0
△5	47.85 [1.884]	45.72 [1.800]	18	19	6-146305-9
△5	45.31 [1.784]	43.18 [1.700]	17	18	6-146305-8
△5	42.77 [1.684]	40.64 [1.600]	16	17	6-146305-7
△5	40.23 [1.584]	38.10 [1.500]	15	16	6-146305-6
△5	37.69 [1.484]	35.56 [1.400]	14	15	6-146305-5
△5	35.15 [1.384]	33.02 [1.300]	13	14	6-146305-4
△5	32.61 [1.284]	30.48 [1.200]	12	13	6-146305-3
△5	30.07 [1.184]	27.94 [1.100]	11	12	6-146305-2
△5	27.53 [1.084]	25.40 [1.000]	10	11	6-146305-1
△5	24.99 [.984]	22.86 [.900]	9	10	6-146305-0
△5	22.45 [.884]	20.32 [.800]	8	9	5-146305-9
△5	19.91 [.784]	17.78 [.700]	7	8	5-146305-8
△5	17.37 [.684]	15.24 [.600]	6	7	5-146305-7
△5	14.83 [.584]	12.70 [.500]	5	6	5-146305-6
△5	12.29 [.484]	10.16 [.400]	4	5	5-146305-5
△5	9.75 [.384]	7.62 [.300]	3	4	5-146305-4
△5	7.21 [.284]	5.08 [.200]	2	3	5-146305-3
△5	4.67 [.184]	2.54 [.100]	1	2	5-146305-2
△5	2.13 [.084]	[-]	0	1	5-146305-1

PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.					
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DIN T. HOFFMAN 21JUN95 CHK G. DUBNICZKI APPV G. DUBNICZKI PRODUCT SPEC APPLICATION SPEC SIZE A1 WEIGHT -- CUSTOMER DRAWING	
0 PLC ± - 1 PLC ± - 2 PLC ± 0.51[.02] 3 PLC ± 0.127[.005] 4 PLC ± 0.0127[.0005] ANGLES ±		FINISH SEE TABLE WEIGHT -- SCALE 1:1		DRAWING NO. 146305 SHEET 2 OF 2 REV C3	
		HEATER ASSEMBLY, MOD II, B/A, HIGH TEMP, RA, SINGLE ROW, W/.025 SQUARE POSTS			