




WARNING LABEL FORMAT



LABEL FORMAT  
LAST LETTER OF DATE CODE 'X':  
'D'= DAY SHIFT, 'N'= NIGHT SHIF



POLARIZATION "A"

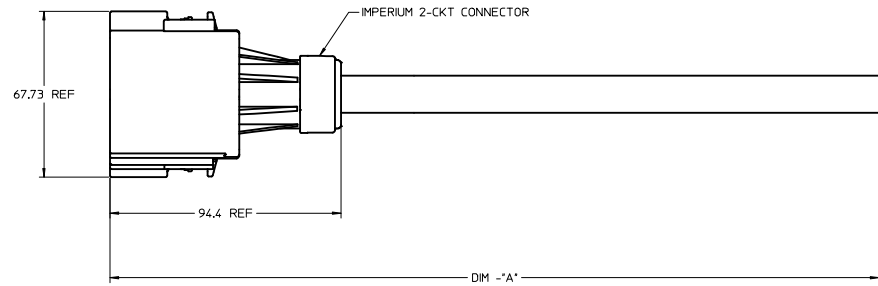

NOTES:

1. MATERIAL: MAIN HOUSING: PBT UV STABILIZED, COLOR: ORANGE  
POWER TERMINALS: COPPER  
HVIL TERMINALS: COPPER ALLOY
2. FINISH: POWER TERMINALS: SILVER OVER NICKEL PLATING  
HVIL TERMINALS: TIN OVER NICKEL WITH SELECT GOLD PLATING
3. CABLE FOR POWER TERMINALS: CHAMPLAIN EXRAD-FXS 1/0X WITH EMI SHIELD.
4. WIRE FOR HVIL TERMINALS: 18 GAGE TXL AUTOMOTIVE GRADE STRANDED WIRE.
5. PACKAGING SPECIFICATION: PK-100212-001.
6. PRODUCT SPECIFICATION: PS-171467-001.
7. LEAD FREE, NO ROHS EXEMPTIONS.
8. MATING CONNECTORS: 171467 SERIES HEADERS.

MOLEX MATERIAL NO.	DIM -"A"
100212-1001	500±10
100212-1011	1000±15
100212-1021	1500±20
100212-1031	2000±25
100212-1041	3000±30
100212-1051	14000±125
100212-1061	5000±50

ADD: 100212-1061 EC NO: PFG2016-1167 DRAWN: SUHINI CHECKED: JING APPR: APATEL DATE: 2016/02/24 DATE: 2016/02/25 DATE: 2016/02/25	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽=0	4 PLACES ± mm INCH	MM ONLY	1:1	METRIC	☉
	▽=0	3 PLACES ± 0.13				
	▽=0	1 PLACE ± 0.25				
		ANGULAR ± 3°	MATERIAL NO.	DOCUMENT NO.		SHEET NO.
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE CHART	SD-100212-001		1 OF 2
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

DATE	REV	DESCRIPTION
2013/11/04	A	INITIAL RELEASE
2015/03/11	B	ADDED POL-B OPTION TO CHART & VIEW. UPDATED LABEL FORMATS.
2015/03/25	C	ADDED NEW CABLE ASSY MAT. NO.'S, REVISED TOLERNACES, & ADDED SHEET 2 REV. TABLE.
2015/06/02	D	REMOVED POL-B OPTION PIGTAIL ASSY MAT. NO., & REMOVED POL-B VIEW.
2015/12/21	E	ADD P/N 100212-1051, CORRECT TO PS-171467-001
2016/02/24	F	ADD P/N 100212-1061

<b>SEE REV. TABLE</b> IEC NO: IFG2016-1167 DRAWN BY: TDRWNGSDHINI 2016/02/24 CHECKED BY: CHYKJMLUNG 2016/02/25 APPR: APATEL 2016/02/25 REV DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>±0.10</td> <td>±0.004</td> </tr> <tr> <td>3 PLACES</td> <td>±0.15</td> <td>±0.005</td> </tr> <tr> <td>2 PLACES</td> <td>±0.25</td> <td>±0.010</td> </tr> <tr> <td>1 PLACE</td> <td>±0.50</td> <td>±0.020</td> </tr> <tr> <td>0 PLACE</td> <td>±1.00</td> <td>±0.040</td> </tr> </tbody> </table> ANGULAR ± 3° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		mm	INCH	4 PLACES	±0.10	±0.004	3 PLACES	±0.15	±0.005	2 PLACES	±0.25	±0.010	1 PLACE	±0.50	±0.020	0 PLACE	±1.00	±0.040	DIMENSION STYLE <b>MM ONLY</b>	SCALE <b>1:1</b>	DESIGN UNITS <b>METRIC</b>	THIRD ANGLE PROJECTION 	DRAWN BY: HEMARTINEZ 2013/08/12 CHECKED BY: JJPWLICKI 2013/08/12 APPROVED BY: KMONROE 2013/11/04	DATE: 2013/08/12 DATE: 2013/08/12 DATE: 2013/11/04	TITLE <b>IMPERIUM 2-CKT PLUG PIGTAIL POWER CABLE ASSY POL-A</b> 	MATERIAL NO. <b>SEE SHEET 1</b>	DOCUMENT NO. <b>SD-100212-001</b>	SHEET NO. <b>2 OF 2</b>
		mm	INCH																											
4 PLACES	±0.10	±0.004																												
3 PLACES	±0.15	±0.005																												
2 PLACES	±0.25	±0.010																												
1 PLACE	±0.50	±0.020																												
0 PLACE	±1.00	±0.040																												
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																														