



TE Internal #: 282308-1

Automotive Terminals, Receptacle, Mating Tab Width 5.8 mm [.228 in], Tab Thickness .8 mm [.031 in], 20 – 15 AWG Wire Size, .5 – 1.5 mm<sup>2</sup> Wire Size

[View on TE.com >](#)
[Terminals & Splices > Automotive Terminals](#)
Terminal Type: **Receptacle**Mating Tab Width: **5.8 mm [.228 in]**Mating Tab Thickness: **.8 mm [.031 in]**Terminal Transmits: **0 – 24 A (Low Power)**Wire Size: **20 – 15 AWG**

## Features

### Product Type Features

Receptacle Style	180°
Sealable	No
Primary Locking Feature	Clean Body

### Contact Features

Contact Size	5mm
Contact Fabrication	Stamped & Formed
Wire Contact Termination Area Plating Material	Tin
Typical Current Rating	14 A
Crimp Type	F-Crimp
Terminal Type	Receptacle
Mating Tab Width	5.8 mm[.228 in]
Mating Tab Thickness	.8 mm[.031 in]
Interface Plating	Tin (Sn)

### Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire

### Dimensions

Compatible Insulation Diameter Range	2 – 3.35 mm[.079 – .102 in]
Wire Size	.5 – 1.5 mm <sup>2</sup>
Wire Size Search	15 AWG, 16 AWG, 17 AWG, 18 AWG, 19 AWG, 20 AWG



### Usage Conditions

Insulation Option	Uninsulated
Operating Temperature (Max)	80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C, 130 °C [176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F][266 °F]
Operating Temperature Range	-30 – 130 °C [-22 – 266 °F]

### Operation/Application

Compatible With Wire Base Material	Copper
------------------------------------	--------

### Packaging Features

Packaging Quantity	5000
Packaging Method	Reel

### Other

Terminal Transmits	0 – 24 A (Low Power)
--------------------	----------------------

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on




requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts

TE Part # 281872-1 5MM PITCH TAB/RECPT CONN	TE Part # 1-1379200-1 ALU FERRULE GDL 5G	TE Part # 2-2150654-1 OCEAN_2.0_Applicator-E-080F130F	TE Part # 2-2150654-2 OCEAN_2.0_Applicator-E-080F130F
TE Part # 2150654-1 OCEAN_2.0_Applicator-E-080F130F	TE Part # 2150654-2 OCEAN_2.0_Applicator-E-080F130F	TE Part # 7-2150654-1 OCEAN_2.0_Applicator-E-080F130F	TE Part # 7-2150654-2 OCEAN_2.0_Applicator-E-080F130F
TE Part # 7-2150654-7 OCEAN_2.0_SPARE_PART_KIT-080F130F	TE Part # 281872-3 5MM PITCH TAB/RECPT CONN	TE Part # 282164-1 5MM PITCH TAB CONTACT	

## Customers Also Bought

TE Part #1-794075-0 16P MINI UMNL HDR W/O DH SN	TE Part #953130-1 12pos MQS .63 header 180deg	TE Part #5053196254 RNF-100-1/2-0-35MM	TE Part #2822365-2 EJ-2 DBL LOCK PLUG 2P ASSY D GRAY
----------------------------------------------------	--------------------------------------------------	-------------------------------------------	---------------------------------------------------------

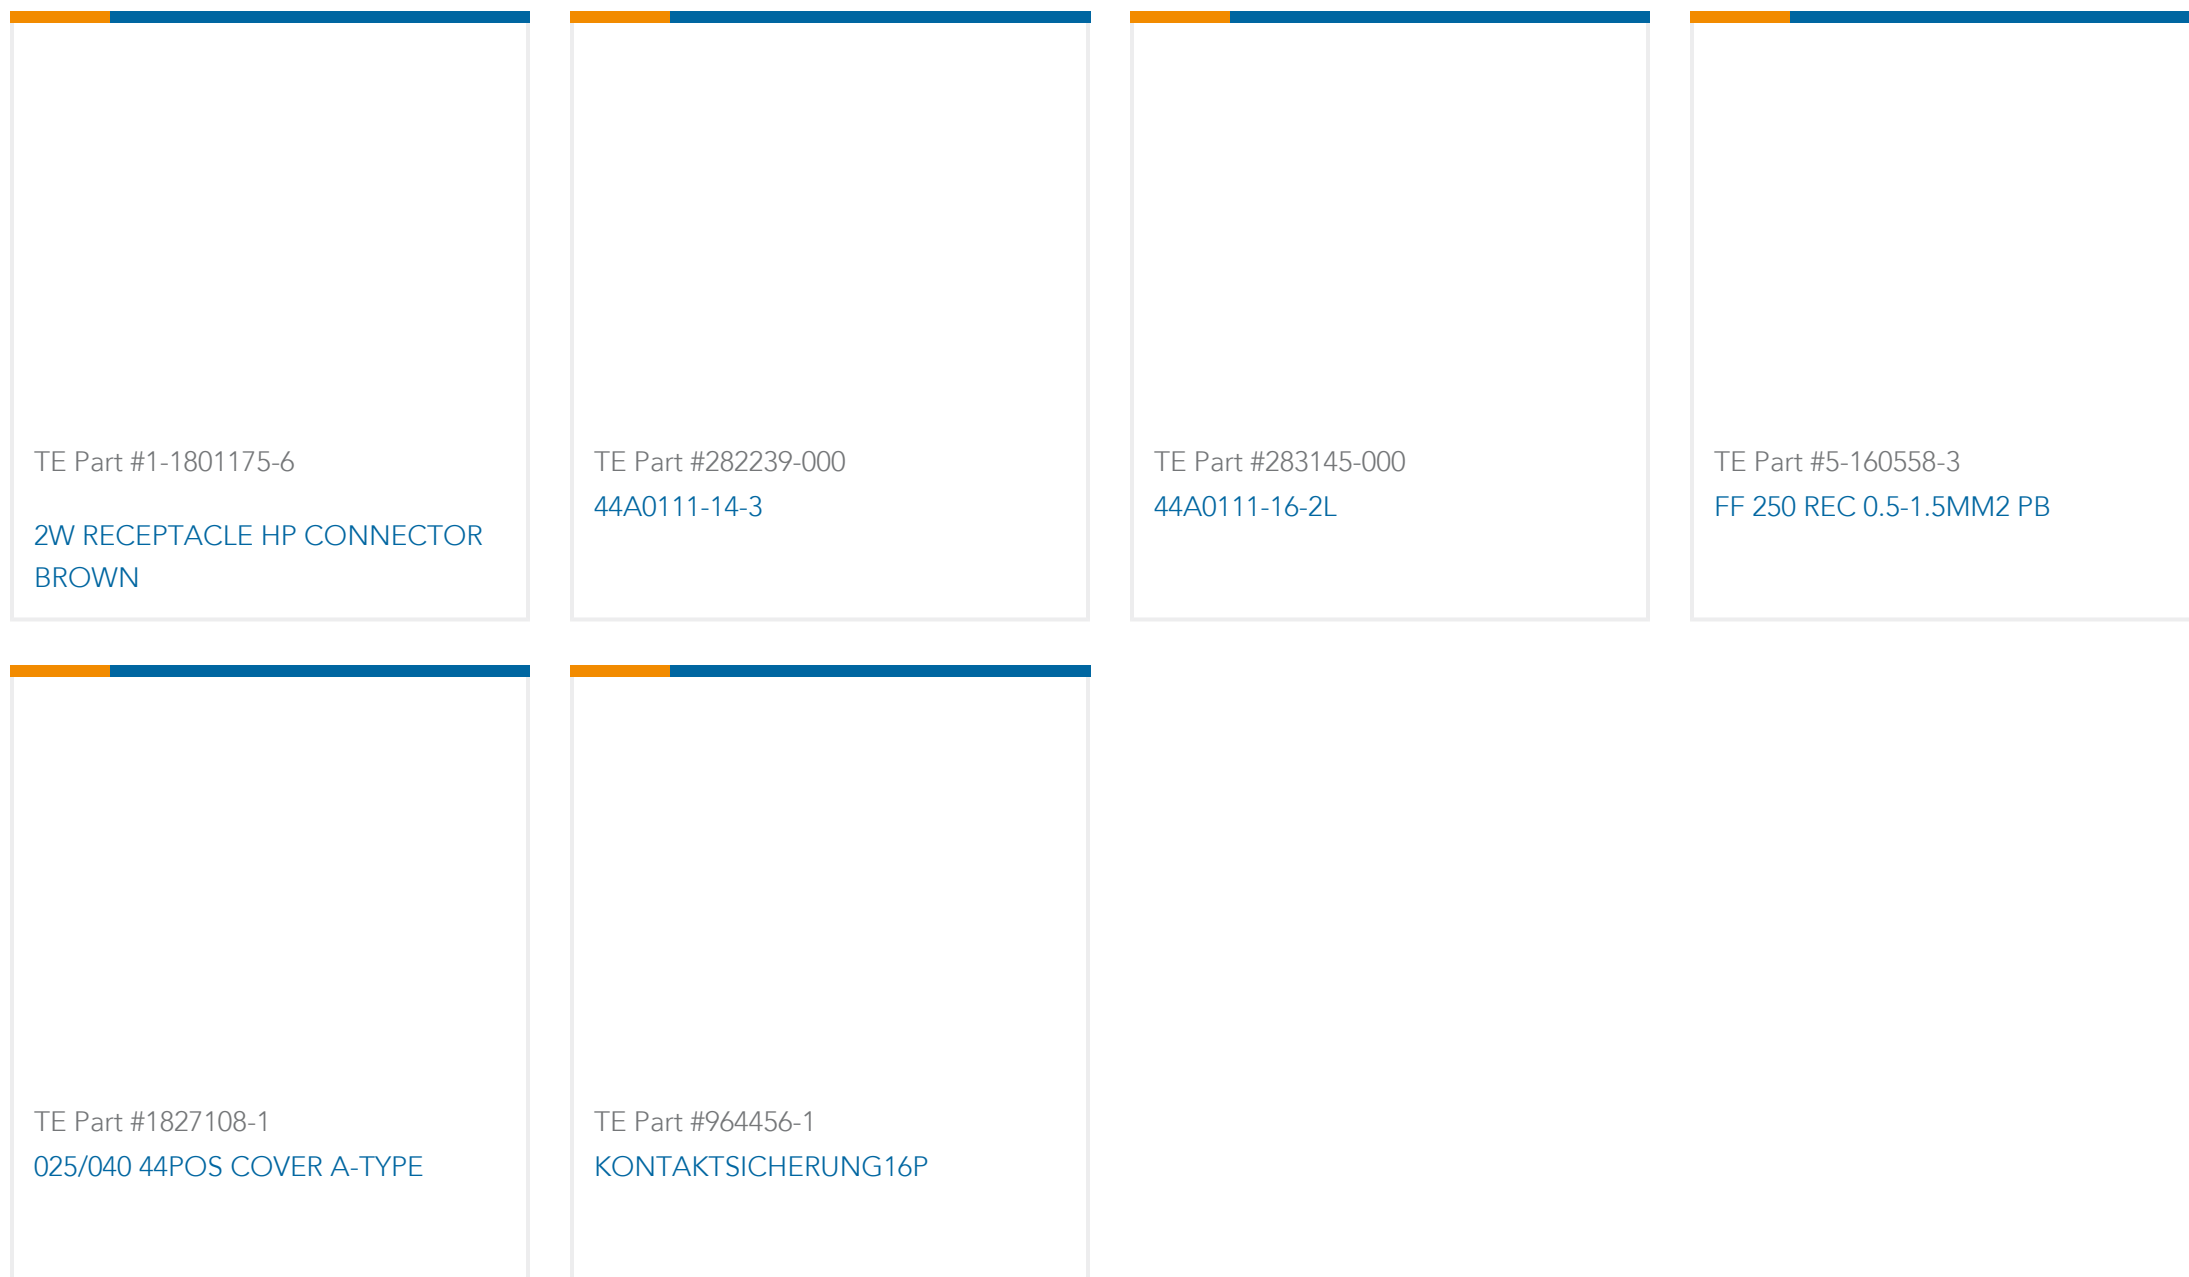

## Documents

### Product Drawings

#### 5MM PITCH RCPT CONTACT

English

### CAD Files

#### Customer View Model

[ENG\\_CVM\\_282308-1\\_A.3d\\_igs.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_282308-1\\_A.3d\\_stp.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_282308-1\\_A.2d\\_dxf.zip](#)

English

### 3D PDF

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Product Specifications

#### Application Specification

German

#### Application Specification

English

#### Application Specification

English